

Catalogue 26/27

Every connection counts



Lamello connects

In the world of joining technology, every joint is more than just a technical solution – it is an expression of precision, reliability and progress.

For more than half a century, we have been passionate about developing tools and systems that complete your unique projects and support processes efficiently and sustainably. We want to give you the freedom to realise your ideas – without compromise.

Discover the latest innovations in our catalogue and be inspired by the possibilities of our products.

Together, we create joints that last for generations.



Marco Schweizer
Group CEO



Susanne Affolter-Steiner
Owner and Chairperson of the Board of Directors

Content



Lamello 6–21

P-System 22–78

The time-saving joining system with form-locking anchoring

P-System overview	24–33
Clamex P-14	34–35
Clamex P-14/10 Medius	36–37
Clamex P-10	38–39
Clamex P-14/10 Flexus	40–41
Clamex P-14 CNC	42–43
Advantages of the Clamex P	44
Bisco P	46–47
Tenso P-14	48–49
Tenso P-10	50–51
Divario P-18	52–53
LC P-16 connector for lightweight construction	54–55
LC P-16	56–57
LC P-16 installation Information	58
Versatile applications with LC P-16	59
High performance without cable	60–61
More flexible in the workshop	62
Mobile working on the construction site	63
Zeta P2 cordless	64–65
Zeta P2	66–67
Zeta P2 Set	68
Connected in seconds ...	69
3-year Lamello warranty	70
Versatile use	72–73
Technical information	74–78

Lamello System 80–117

The original for efficient, intuitive and precise joints

Lamello System overview	82–89
Original wood biscuit	90–91
E20	92–93
Clamex S-20	94–95
Clamex S-18	96–97
K20	98–99
C20/C10	100–101
Minicol	102–103
Classic X cordless	106–107
Classic X	108–109
Top 21	110–111
Original Lamello biscuit joiners	112
Versatile use	113
Technical information	114–117

Drilling System 118–151

Unique drilling systems for high productive and aesthetic demands

Drilling System overview	120–127
Cabineo 12	128–129
Cabineo 8	130–131
Cabineo 8 M6	132–133
Cabineo insert M6	134–135
Cabineo X	136–137
Advantages of Cabineo	138
Cabineo compared with cam and dowel	139
Examples of manufacturing and assembly processes	140–141
Invis Mx2	142–145
Rasto drill jig	146–147
Technical information	148–151

Networked production 152–169

Strong partnerships for efficient production with CNC technology

P-System with CNC	156–159
P-System equipment options	160–161
Ideas for standardising	162
Possible combination of CNC machines with Zeta P2	163
Cabineo with CNC	164–165
CNC tools – For the P-System	166–167
CNC tools – For Cabineo	168

Accessories 170–191

Accessories/Spare Parts	170–184
Technical notes	185
Machine overview	186
Systainer and sortainer	187
Overview of connectors	188–189
Plan your furniture with Lamello	190–191

Subject to modifications and amendments. Plastic parts may vary in colour due to the production process. Colour specifications are for guidance only.

© Lamello AG. The content of this brochure is protected by copyright and cannot be used for any other purpose without the written consent of Lamello AG.

People at the heart

These values connect us:

Together

We support each other, communicate respectfully on an equal footing, give each other undivided attention and use the diversity of our shared creativity – we are one team.



Reliable

We are committed to consistent quality; we respect our partners' time with consistent punctuality, keep our promises, actively inform and create trust across borders.

Transparent

We act according to clear guidelines and expectations, have comprehensible decision-making processes, communicate openly and honestly and view feedback as a valuable asset.

Customer-focused

We create the best possible customer experiences, spend a lot of time with users, act quickly and effectively on customer feedback, share our experiences with the community, behave loyally and anticipate future needs.



Responsible

We take full responsibility for our actions and are committed to sustainability towards the environment, people and business. Ethical behaviour is the norm and we are committed to the common good, stand by our decisions and are willing to learn from them.

Inspiring

We live creativity and innovation, motivate each other, promote personal training and individual development, create global standards and give meaning to our stories.

Our promise

Your unique piece of furniture – perfectly connected



- Endless design possibilities for timeless aesthetics
- Time-saving and reliable
- From experts to experts
- Our passion for your craft
- With us, your furniture connects generations

Interior fitting

Shelf construction

Furniture manufacturing



Inspired by the roots of our global connector legends, we will continue to strive for the next innovation "made in Switzerland".

Furniture in series – without compromise



- Unlimited design freedom for your angles and mitres
- Differentiate your collections with unique designs
- Reliably pre-assembled, optimally disassembled and compactly stacked – simply ingenious
- Combine serial manufacturing and innovation with us

Kitchen manufacturing

Bathroom furniture

Shop fitting

Office furniture



Added value

This is what you can expect from us.

Support in person

Do you have any questions concerning our products or a certain application? Would you like to learn more about the process benefits for your business? Our qualified employees and sales partners will be happy to help you quickly and competently, whether by telephone, online or during a personal support on site.



Latest news

Stay up-to-date and sign up for our Lamello News and e-newsletter. Become part of the Lamello community on social media and be inspired, or visit our stand at one of the numerous trade fairs. We are always happy to hear from you.



Subscribe to
our Lamello
News Magazine



Subscribe
to our
newsletter




Our services

Quality is one of the cornerstones of our business, and so our products are designed to last. If a repair is necessary, we can offer you uncomplicated service through our certified Lamello service partners and a spare parts warranty of at least 10 years.



Support in your planning

With the connector search and the P-System configurator on our website, you can quickly find the right connector for your design and requirements. With CAD data for our connectors, tips and tricks, as well as videos about the wide range of applications, we can guide and support you in your planning on our website and on the Lamello YouTube channel.

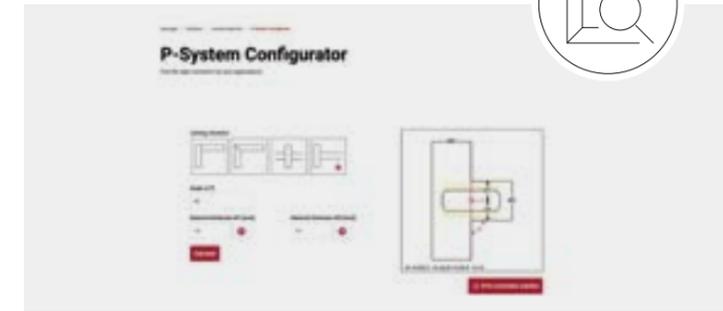


Qualified sales partners

Our professional and committed sales partners provide you with qualified advice, always keeping you informed about new products. This way, you can see the benefits of our products first hand.




Competent planning and machining partners

From planning and design to the right tool to machine with the CNC machine: more than 40 industry-leading partner companies support the efficient use and integration of our products into your production.

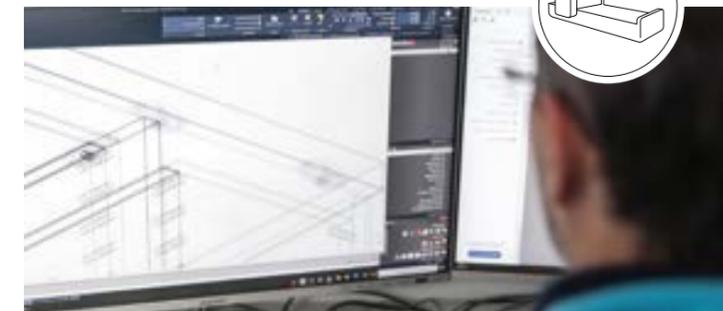

Our roots: Looking back. Thinking ahead.

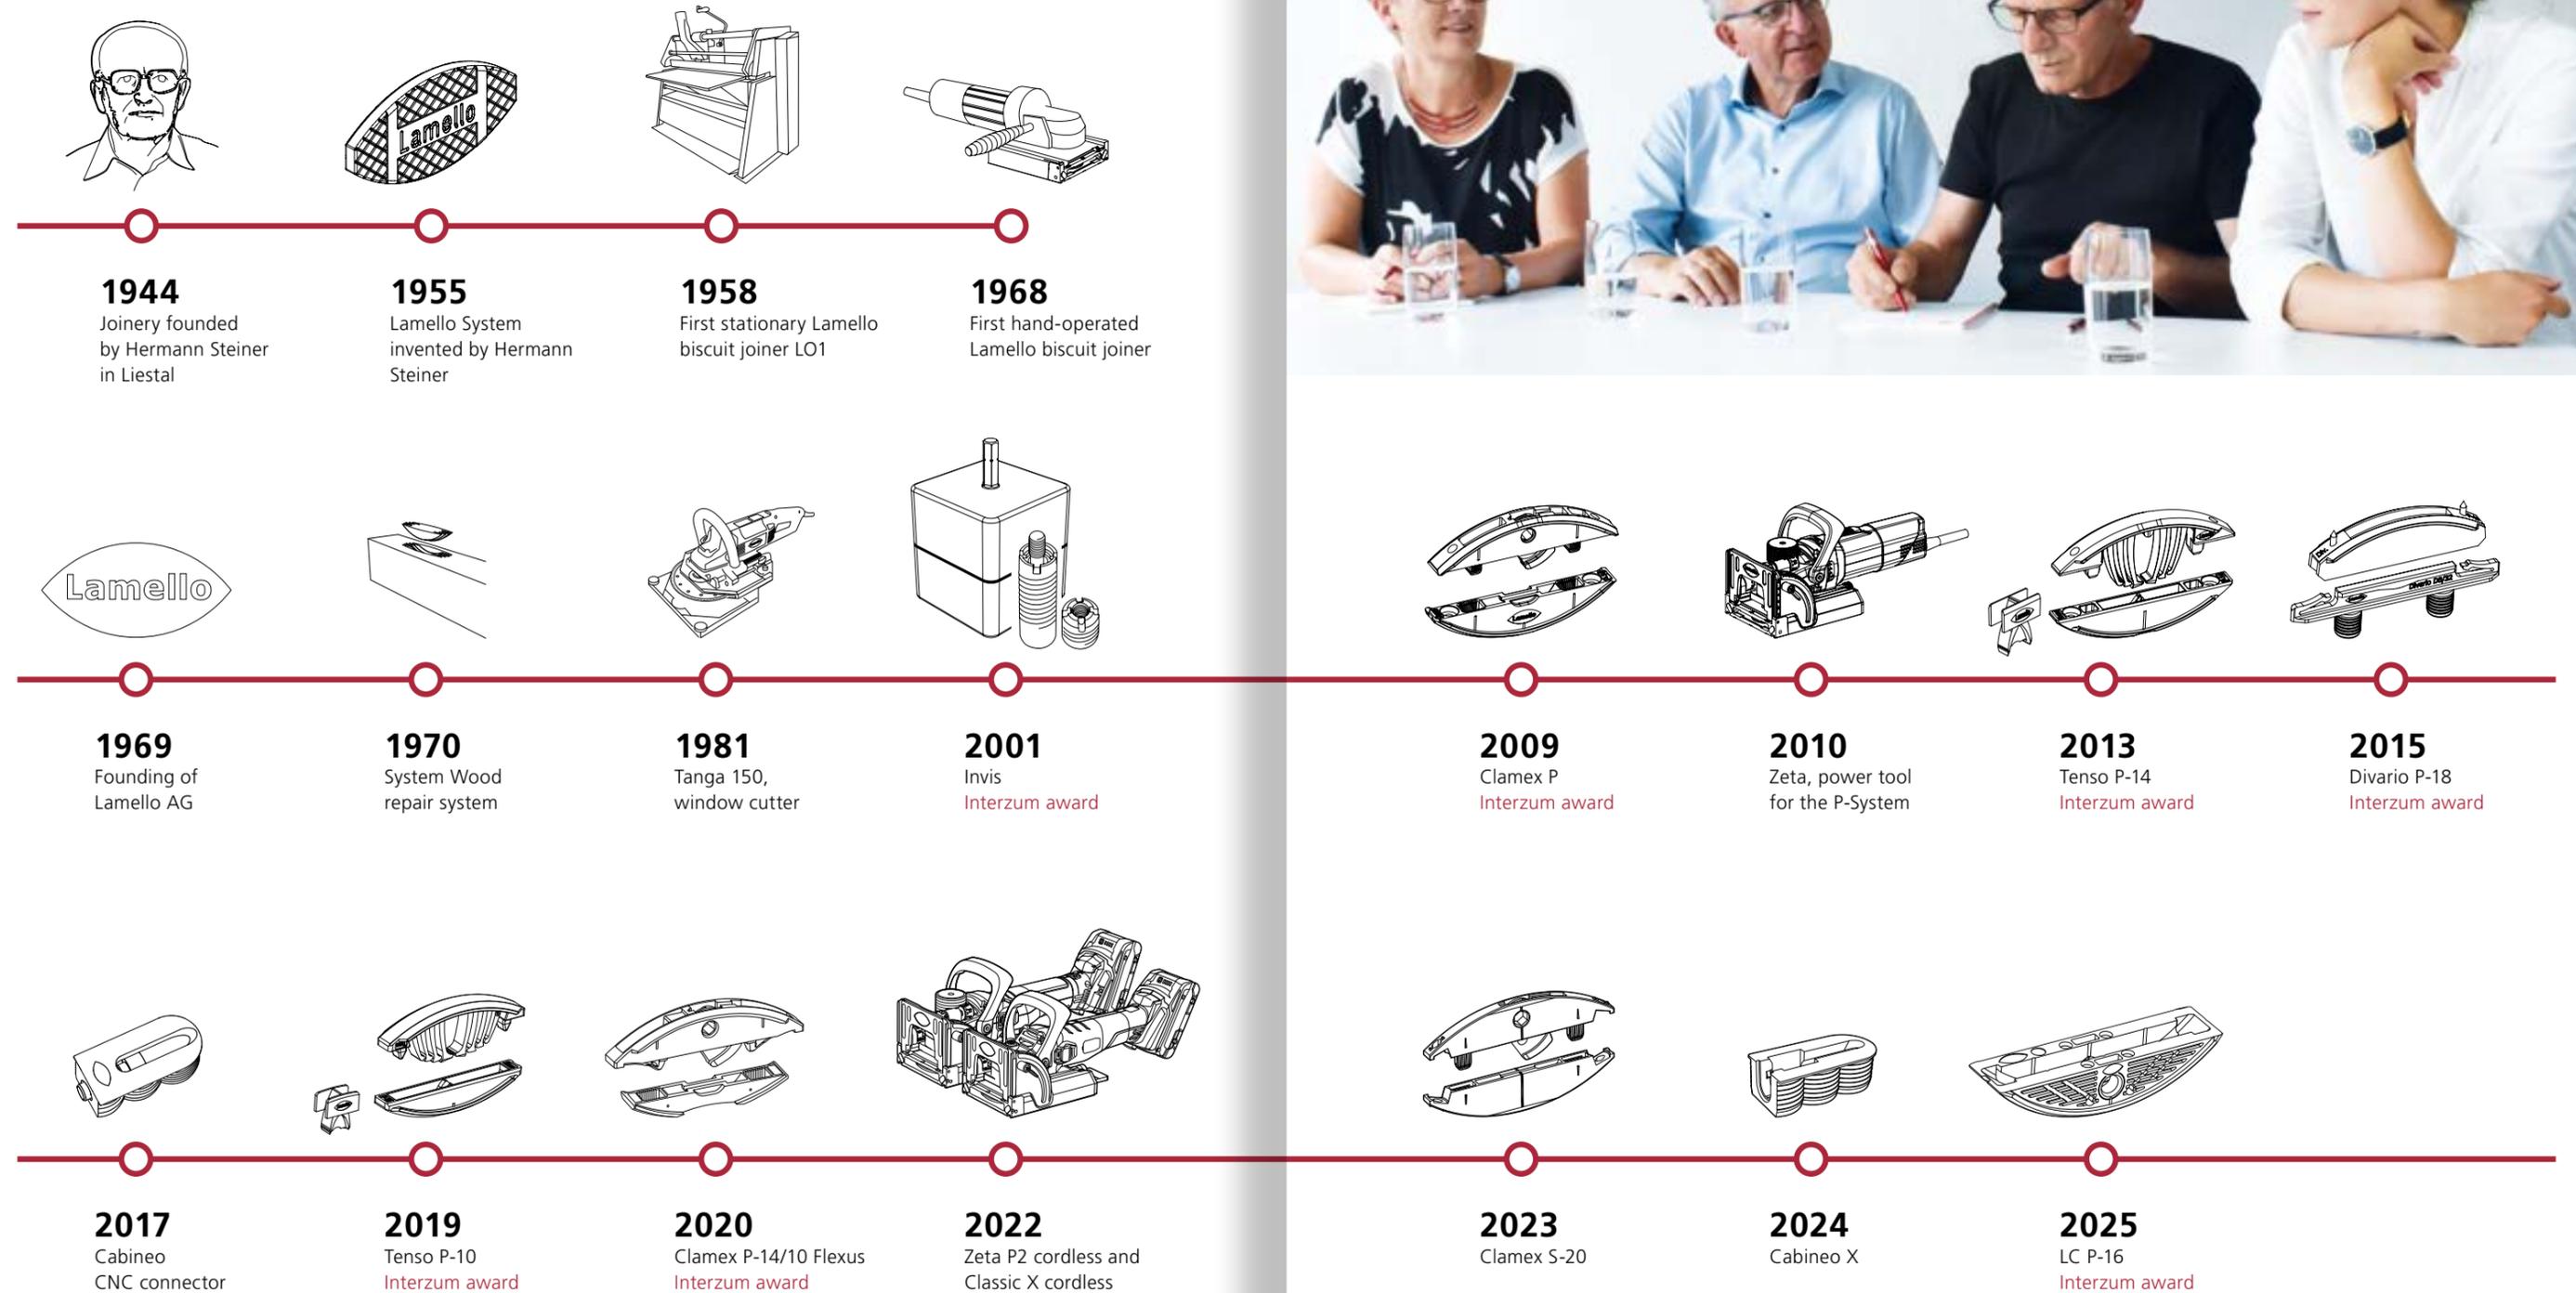

We are proud of our more than 50-year history. At the same time, we are looking ahead and continuously developing. Since the beginning of Lamello's history, the pursuit of new insights, continuous improvements and system solutions have been at the heart of Lamello.

Hermann Steiner is the founder of Lamello, who launched his revolutionary idea, the wooden biscuit, in 1955. Every milestone starts with an idea. However, influential or even revolutionary ideas don't just happen.

Innovation

Flexibility. Productivity. Creativity.
Every connection counts



Combination of many years of expertise and intensive development work

Since the beginning of Lamello's history, the pursuit of new insights, continuous improvements and system solutions has been at the heart of Lamello.

It is only through many years of practical knowledge and intensive development work together with our customers that we have been able to constantly come up with new solutions, and in so doing decisively shape the market for wood joining technology to this day. We have built up our expertise over the course of more than 60 years. This knowledge is complemented by a large dose of curiosity and a close relationship with our customers.

A pioneer of innovation

Our products are the result of continuous innovation and enable our customers to work more creatively, flexibly, productively and efficiently. As pioneers, we strive to overcome technological limits – over 300 patents and industrial property rights are the result of this.



Multiple awards

The Interzum Awards and national innovation awards are a valuable recognition and an incentive to continue moving forward. Our wooden biscuit even made it to the renowned Museum of Modern Art in New York for the exhibition "The Most Humble Innovations of the 20th Century".



Revolutionary ideas, pioneering innovations

In 1955, Hermann Steiner invented the original wooden biscuit – a revolutionary idea. It all started with wood, but new materials are shaping the future. Lamello is opening a new era with the P-System connectors. The P-System groove enables quick assembly without the use of glue or screws.



Sustainability

Beech wood from sustainable, locally managed forests is just the beginning



At Lamello, we are committed to promoting a sustainable future

We source and use the raw material wood responsibly as a renewable resource. We also take a conscious approach to the use of other materials, as our goal is to continuously reduce the environmental impact of our products and production methods through innovative technologies and efficient processes.

We actively engage in our communities and support educational initiatives that raise awareness of sustainable practices. Through transparency in our communication and partnerships, we strive to help shape the standards in our industry. Together, we work to find the balance between economic success and environmental responsibility to preserve our planet for future generations.

At Lamello, we actively support specialist knowledge relating to Lamello products in the training and development of cabinetmakers. With our commitment, we want to take responsibility and make a valuable contribution to high-quality vocational training in the carpentry industry, because we are convinced that well-trained specialists are the foundation of our successful industry.

Social responsibility and training at Lamello

Our employees are the key to our success, which is why we attach great importance to training and professional development. We work with workshops for people with disabilities to produce popular customer samples. We also promote cabinetmaking talent and support training through active participation and sponsorship.



Sustainability and regionality: Production at our site in Bubendorf

We rely on beech wood (FSC® C120728) from the region and manufacture our products in Bubendorf. Our own wood chip heating system covers our heat requirements, saving over 300 tonnes of crude oil annually. Our long-lasting products conserve resources and avoid waste.



Efficient production and sustainable future at Lamello

Our state-of-the-art manufacturing facilities optimise energy consumption and contribute to sustainability. Spare parts are available for up to 15 years to ensure the durability of our machines. Old machines are recycled in an environmentally friendly way and surplus energy is used to supply households with community heating.



Locations

Far-reaching. Close to home.
We are there for you worldwide

Global presence

Lamello has an international sales network consisting of four sales offices, representatives in over 65 countries and over 400 authorised sales partners.



Our subsidiaries

From here, we support our local customers.



Our head office in Bubendorf, Switzerland

Around 110 employees work at the head office in Bubendorf. Every day, we ensure that our customers receive first-class advice, processes run smoothly and new innovations are created.



Our plastic injection factory in Bubendorf, Switzerland

Lamello's plastic injection factory is located near our head office. Our plastic connectors are manufactured in-house with high precision and years of experience. Lamello's quality promise is perfectly fulfilled by the safety standards.



Our logistics centre in the tri-border region, Germany

Our modern and sustainable logistics centre is located in Grenzach-Wyhlen, Germany. This tactically chosen location offers a great amount of space and enables smooth international shipping to Germany, Austria, Belgium, France, Luxembourg and Italy.



Grenzach-Wyhlen, Germany



Kruishoutem, Belgium | France | Netherlands



Angera, Italy



Feldkirch, Austria

Systems

- P-System
- Lamello System
- Drilling System

Overview



P-System	
Features	Connector

With P-System groove cutter





Detachable

Clamex P





Glueing

Tenso P



Sliding insertion

Divario P





Lamello System	
Features	Connector

With 4 mm Lamello System groove cutter




Glueing

Original wood biscuit





C20




Detachable

Clamex S



Inserted

E20



K20




Drilling System	
Features	Connector





Detachable

Cabineo



Detachable

Invis Mx2




P-System


The time-saving joining system
with form-locking anchoring




Features




Fast installation
Inserting instead of
screwing or glueing




Strong
Form-locking
anchorage across
large surface areas



Lateral tolerance
Perfect, flush
alignment of both
workpieces



Shallow depth
Minimal cutting
depth with maximum
tensile strength




No twisting
The positioning
pins prevent
twisting without
additional dowels

P-System


Overview

Features	Connector	Machines		Sequence			
		Power tool	CNC machines	1 Cut	2 Insert the connector	3 Deliver flat pack	4 Connect the workpieces

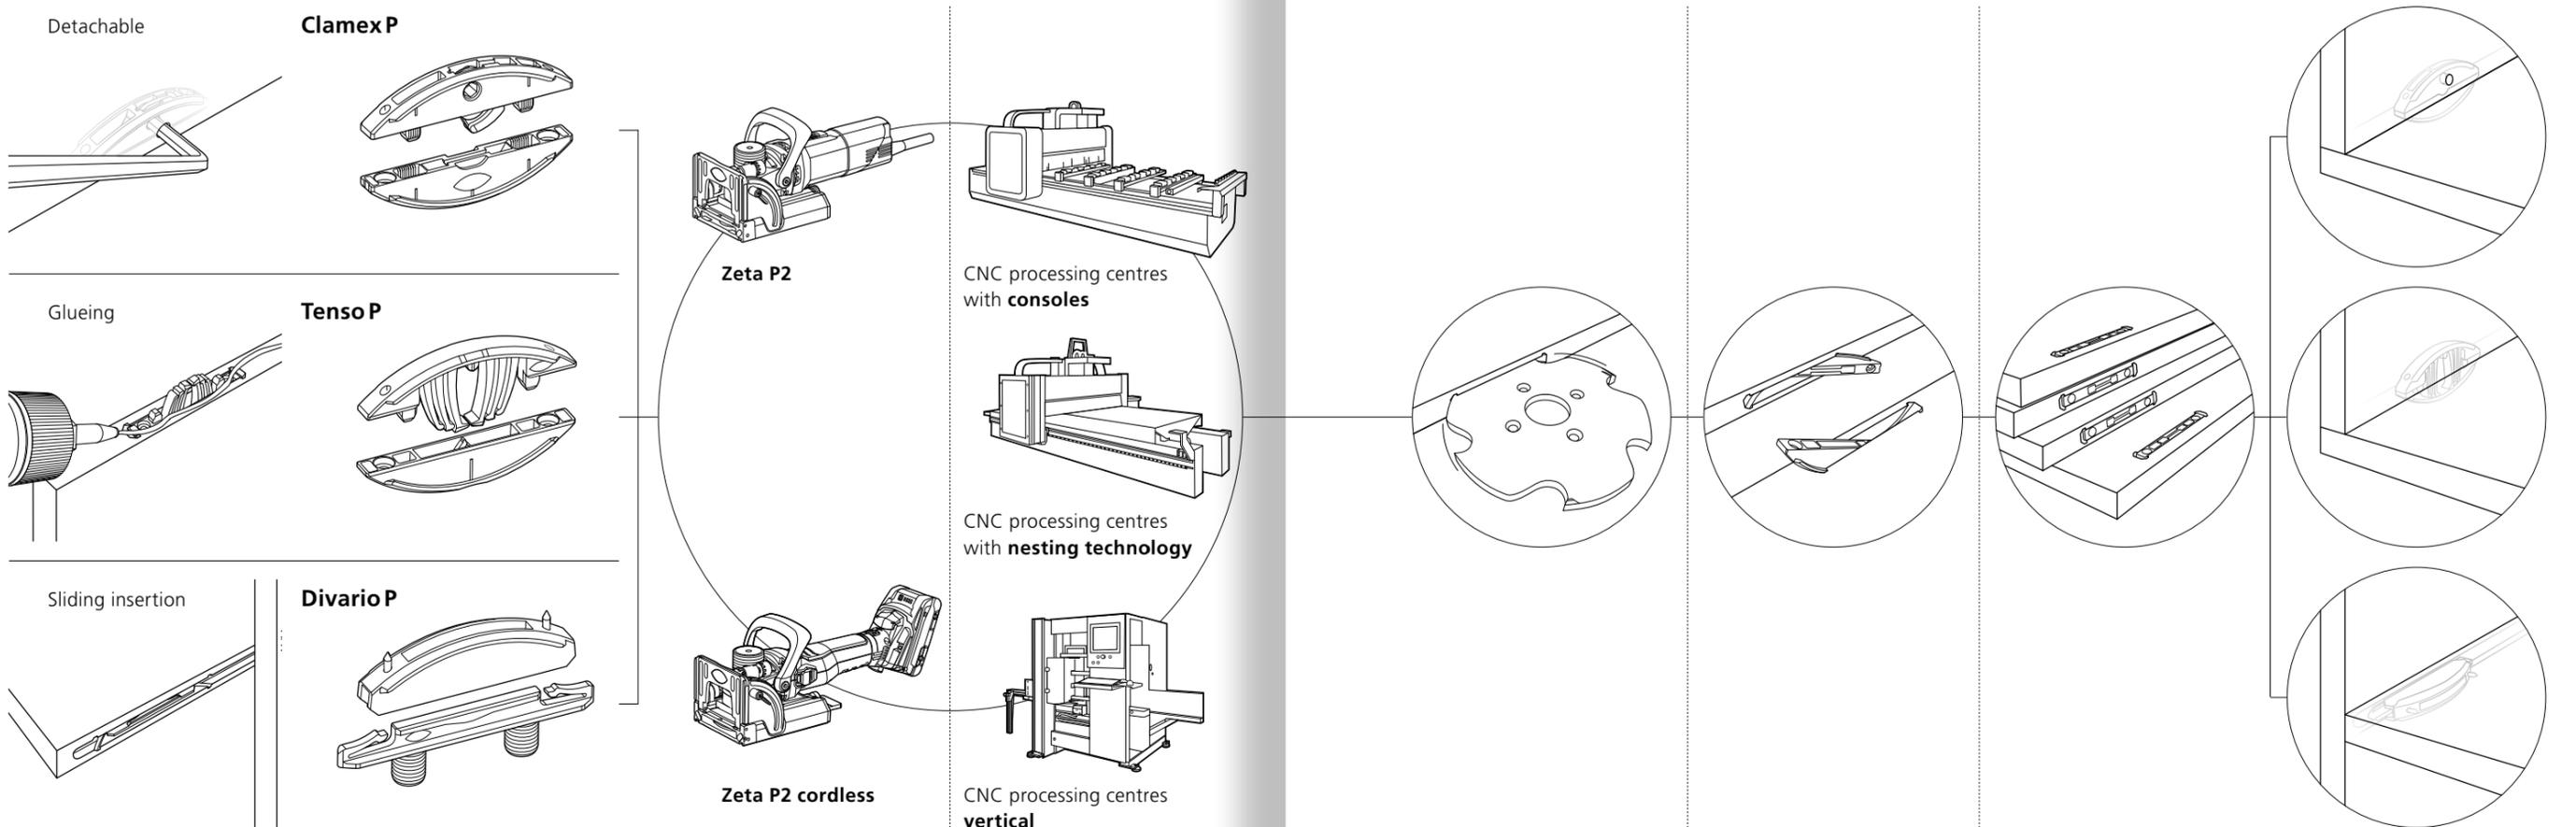


Connectors

Features overview




Clamex P

Detachable furniture connector



Tenso P


Self-clamping connector for glueing




Divario P

Self-clamping, invisible connector for slide insertion


Features




Detachable
Open the connection time and time again with the rotating lever




Aesthetic
The small, hardly visible opening ($\varnothing = 6\text{ mm}$) serves to close and open the connector




High clamping force
Clamp and glue workpieces at any angle




Stackable
Workpieces with pre-installed P-System connectors are stackable for storage and transport




Versatile
The shallow element depth allows for mitres from $22.5^\circ - 180^\circ$, surface, corner and dividing panel connections




Glueing
Fixed joints of two workpieces




Invisible
No visible connector




High clamping force
Allows for perfect alignment and clamps the workpieces ~ 15 kg or 30 lb




Versatile
Simple glueing of mitre joints




Lower assembly force
In combination with the pretension clip, only a short force impulse is required to snap it into place




Sliding insertion
Insertion between two fixed sides or shelves via a guiding groove




Invisible
Guiding groove covers the connectors



Clamped joint
No resistance while inserting until shortly before building the clamping force



Fast installation
Quick installation of the connectors without glue after transport



Assemble by sliding
Partially routed guiding groove for completely invisible furniture joints

« The Clamex P-14/10 Flexus is a logical addition to the P-System range. We are always inspired anew by how reliably Lamello tailors its products to customer needs, and are happy to be part of the Lamello family. »

Hannes Kofler, Owner and Managing Director, Joinery workshop Kofler, Italy




P-System

Applications

Furniture manufacturing



Interior fitting

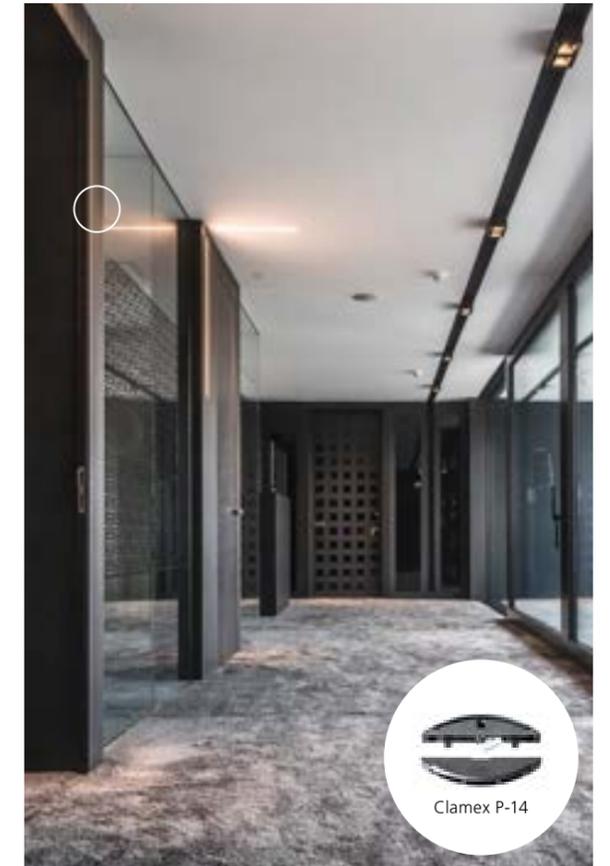


P-System

Applications

Kitchen manufacturing



Commercial joinery

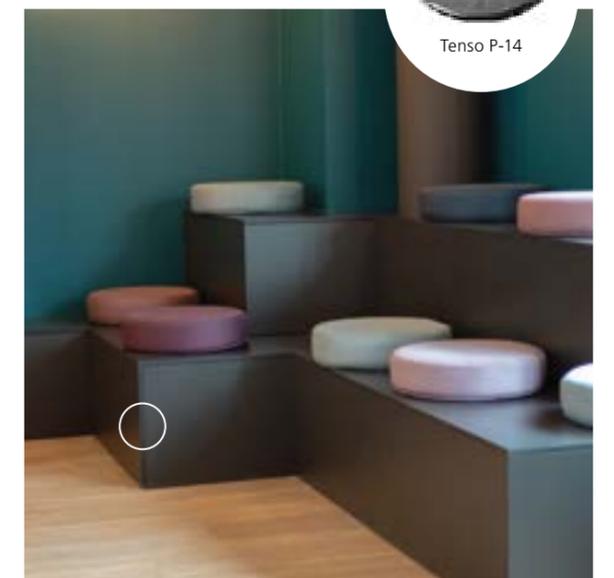


Shop fitting

Clamex P-14

Detachable furniture connector



Features

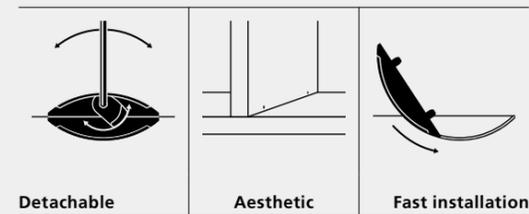

- Detachable furniture connector, installed in seconds
- Aesthetic look with the hardly visible 6 mm access hole
- All-rounder for all angle and miter joints from 22.5° to 180°
- High clamping force for perfectly closed joints
- Ideal for open shelves, cupboards or wardrobes under sloping roofs

Clamex P-14 is a detachable connector and is anchored in the form-locking P-System groove within seconds. Through the minimalist 6 mm access hole, Clamex P-14 is firmly connected and disconnected using a lever. Clamex P-14 eliminates the need for glue, allows aesthetic joints at all angles and is ideal for permanently joined or detachable mitres. Clamex P-14 is used on mitre joints from 18 mm material thickness and in butt joints from 15 mm.

Articles




	Art. No.
Clamex P-14, 80 pairs	145334
Clamex P-14, 300 pairs	145346
Clamex P-14, 1000 pairs	145356
Clamex P-14 element with lever, 2000 pieces	145338
Clamex P-14 element without lever, 2000 pieces	145339

Matching accessories starting on PAGE 170



Installation

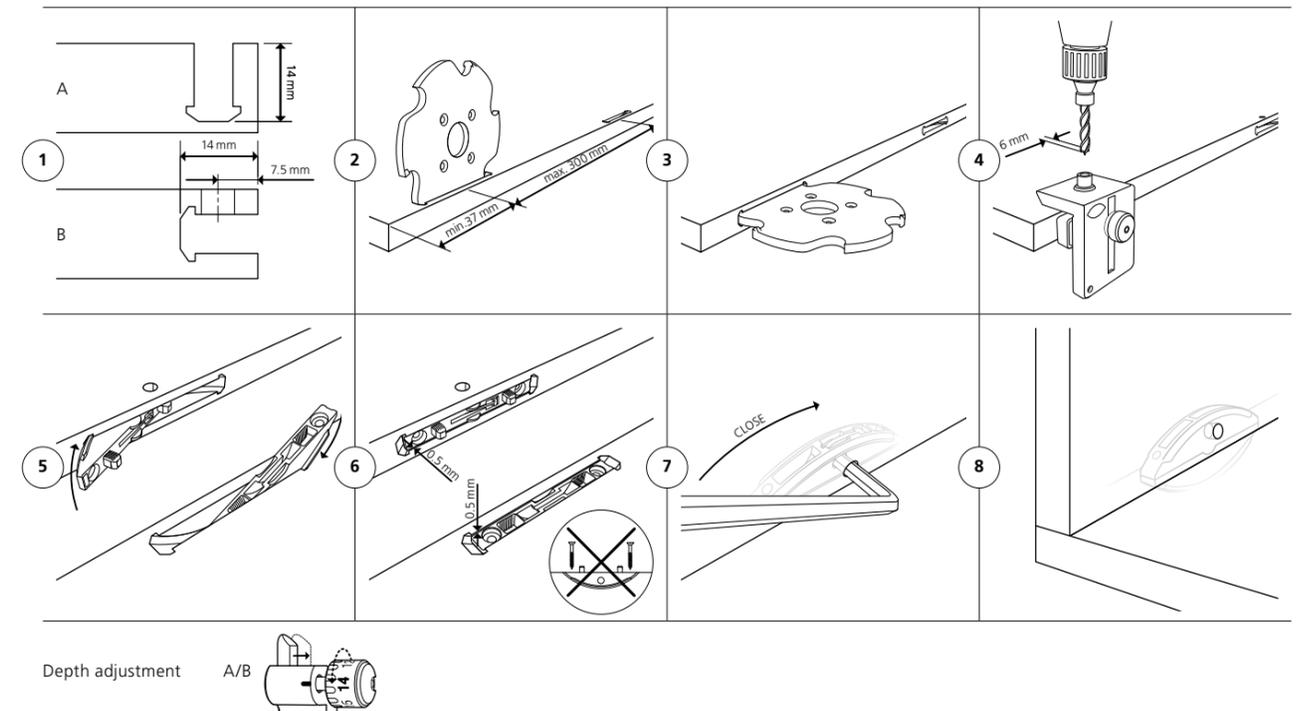

Technical data

Joining methods	Size	64 × 27 × 9.7 mm		
	Cutter	Ø 100.4 × 7 × Ø 22 mm		
	Material connector	Fiberglass reinforced plastic		
	Material of lever	Zinc die cast		
	Installation tolerance	Long. ± 1 mm/radial ± 1 mm		
	Tensile strength (N)	MDF	Particle board	Beech
	Up to	1210 ¹	1070 ¹	1870 ¹
	Material range	Particle board, MDF, plywood, softwood, hardwood etc.		

See PAGE 74 for technical specifications | 90° and 45° cover caps are available in a variety of colours PAGE 172–173


¹ See technical notes on page PAGE 185

Clamex P-14/10 Medius

Detachable connector for centre panels for materials from 16 mm thickness



Features

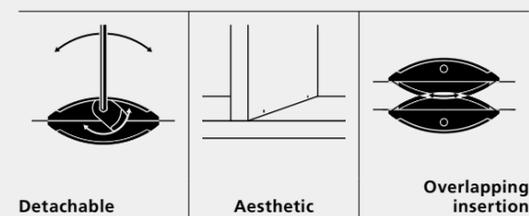

- Detachable furniture connector, installed in seconds
- Supplement to Clamex P-14 for dividing panel connections from 16 mm
- Aesthetic look with the hardly visible 6 mm access hole
- High clamping force for perfectly closed joints
- Ideal for dividing panel connections in sideboards, shelves or cupboards

Clamex P-14/10 Medius is a detachable connector and is anchored in the form-locking P-System groove within seconds. Through the minimalist 6 mm access hole, Clamex P-14/10 Medius is firmly connected and disconnected using a lever. The connector for divisions has two installation depths and is used when two shelves are attached to the same dividing panel at the same height. Due to the reduced installation depth of 10 mm, the minimal thickness for the division is 16 mm.

Articles




	Art. No.
Clamex P-14/10 Medius, 80 pairs	145370
Clamex P-14/10 Medius, 300 pairs	145371
Clamex P-14/10 Medius, 1000 pairs	145357
Clamex P-14 element with lever, 2000 pieces	145338
Clamex P-10 Medius element without lever, 2000 pieces	145369

Matching accessories starting on PAGE 170



Installation

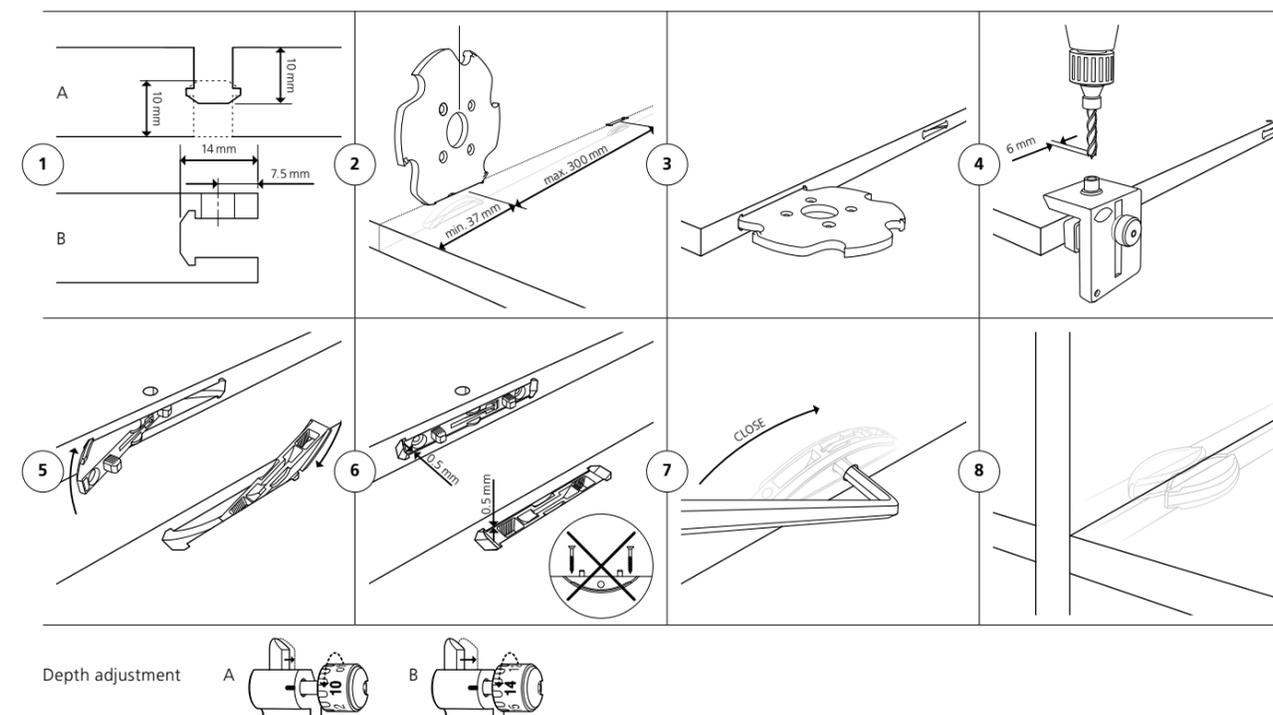

Technical data

Joining methods	Size	64 × 13.5 × 9.7 mm 52 × 7.5 × 9.7 mm
	Cutter	Ø 100.4 × 7 × Ø 22 mm
	Material connector	Fiberglass reinforced plastic
	Material of lever	Zinc die cast
	Installation tolerance	Long. ± 1 mm/radial ± 1 mm
	Tensile strength (N) Up to	MDF 760 ¹ Particle board 680 ¹ Beech 1070 ¹
	Material range	Particle board, MDF, plywood, softwood, hardwood etc.

See PAGE 74 for technical specifications | 90° and 45° cover caps are available in a variety of colours PAGE 172–173


¹ See technical notes on page PAGE 185

Clamex P-10

Detachable connector for materials from 12 mm thickness



Features

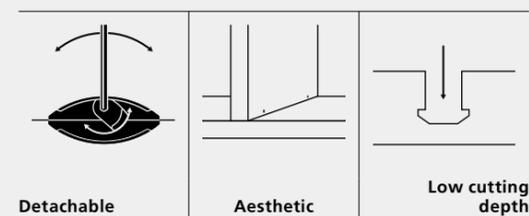

- Detachable furniture connector, installed in seconds
- For miters from 15 mm and butt joints from 12 mm material thickness
- Aesthetic look with the hardly visible 6 mm access hole
- All-rounder for all angle and miter joints from 22.5° to 180°
- Ideal for thin materials, miters, wooden drawers, open shelves


Clamex P-10 is a detachable connector and is anchored in the form-locking P-System groove within seconds. Through the minimalist 6 mm access hole, Clamex P-10 is firmly connected and disconnected using a lever. Clamex P-10 eliminates the need for glue, allows aesthetic joints at all angles and is ideal for permanently joined or detachable mitres. Clamex P-10 is used on mitre joints from 15 mm material thickness and in butt joints from 12 mm.

Articles




	Art. No.
Clamex P-10, 80 pairs	145372
Clamex P-10, 300 pairs	145373
Clamex P-10, 1000 pairs	145374
Clamex P-10 element without lever, 2000 pieces	145358

Matching accessories starting on **PAGE 170**

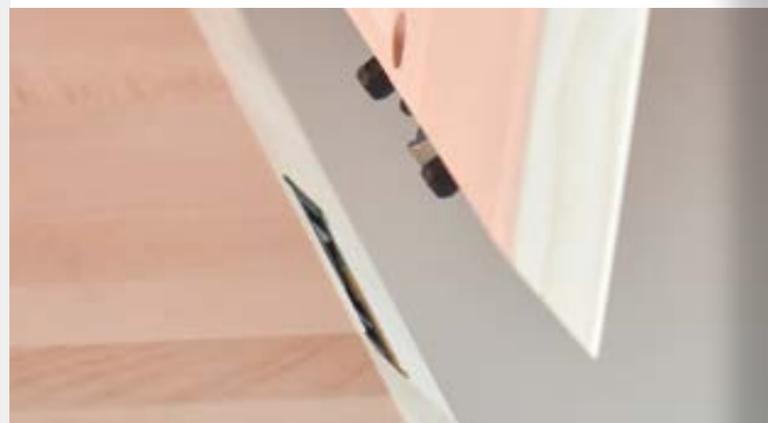

Installation

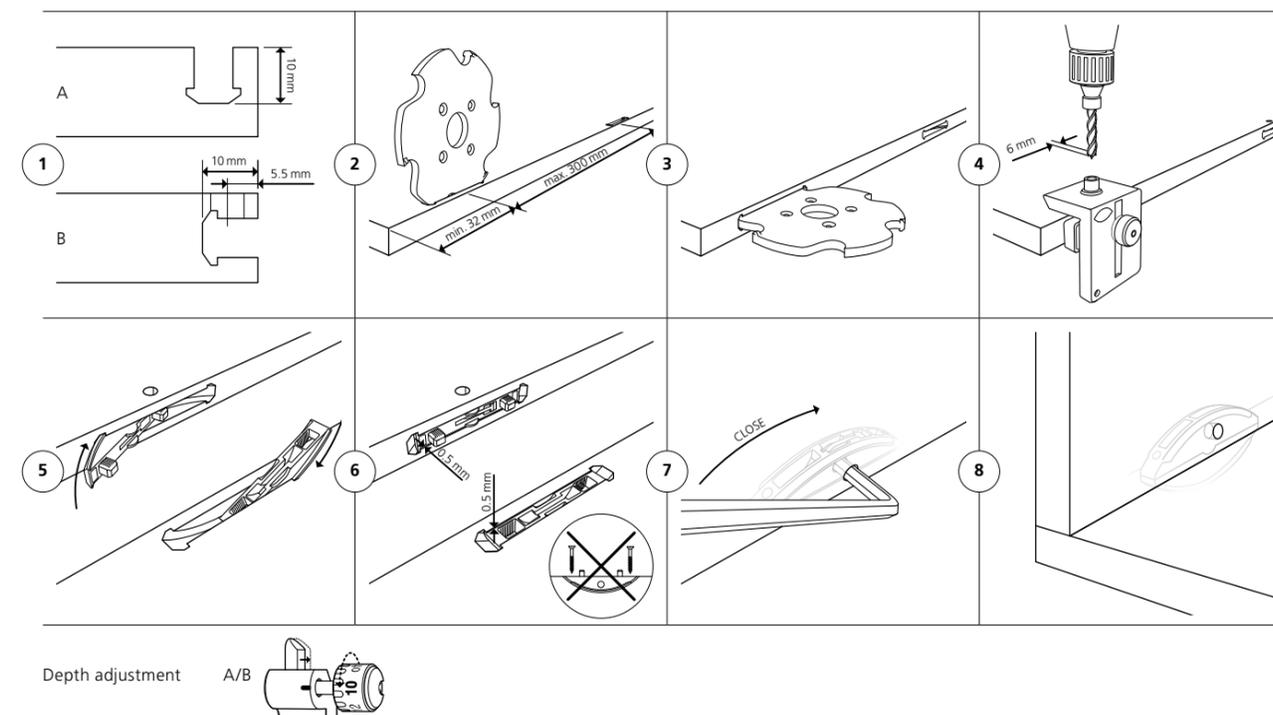

Technical data

Joining methods	Size	52 × 19 × 9.7 mm		
	Cutter	Ø 100.4 × 7 × Ø 22 mm		
	Material connector	Fiberglass reinforced plastic		
	Material of lever	Zinc die cast		
	Installation tolerance	Long. ± 0.5 mm/radial ± 0.5 mm		
	Tensile strength (N) Up to	MDF 700 ¹	Particle board 540 ¹	Beech 900 ¹
	Material range	Particle board, MDF, plywood, softwood, hardwood etc.		

See **PAGE 74** for technical specifications | 90° and 45° cover caps are available in a variety of colours **PAGE 172-173**


¹ See technical notes on page **PAGE 185**

Clamex P-14/10 Flexus

Detachable furniture connector with flexible positioning pins



Features

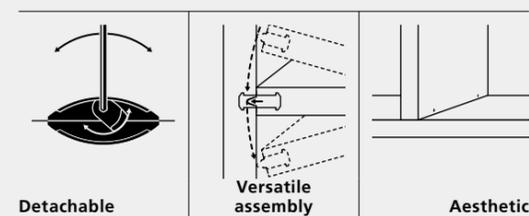

- Detachable furniture connector, installed in seconds
- Flexible positioning pins for retrofitting shelves
- Aesthetic look with the hardly visible 6 mm access hole
- All-rounder for all angle and miter joints from 22.5° to 180°
- Ideal for furniture construction, sideboards, wine racks, inspection flaps

Clamex P-14/10 Flexus is a detachable connector and is anchored in the form-locking P-System groove within seconds. Through the minimalist 6 mm access hole, Clamex P-14/10 Flexus is firmly connected and disconnected using a lever. The flexible positioning pins allow work pieces to be installed in an already assembled cabinet, simplifying the assembly sequence. Clamex P-14 is used in mitre joints from 18 mm material thickness and in butt joints from 12 mm.

Articles




Art. No.

Clamex P-14/10 Flexus, 80 pairs	145315
Clamex P-14/10 Flexus, 300 pairs	145316
Clamex P-14/10 Flexus, 1000 pairs	145317
Clamex P-14 Flexus element with lever, 2000 pieces	145318
Clamex P-10 Medius element without lever, 2000 pieces	145369


Matching accessories starting on PAGE 170



Installation

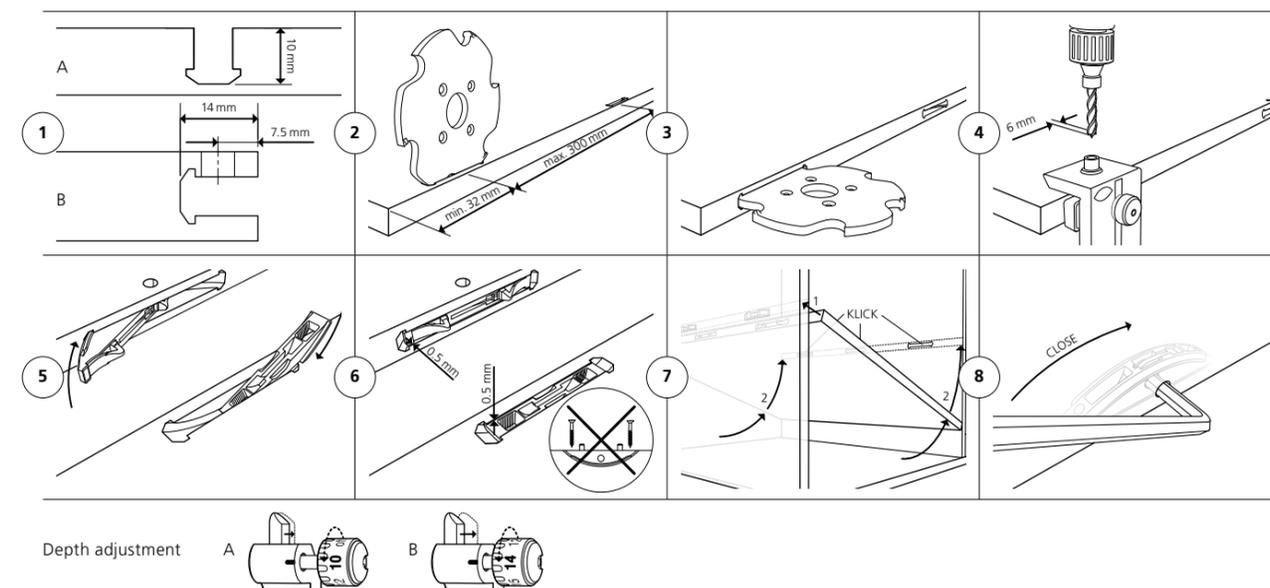


Shelf disassembly

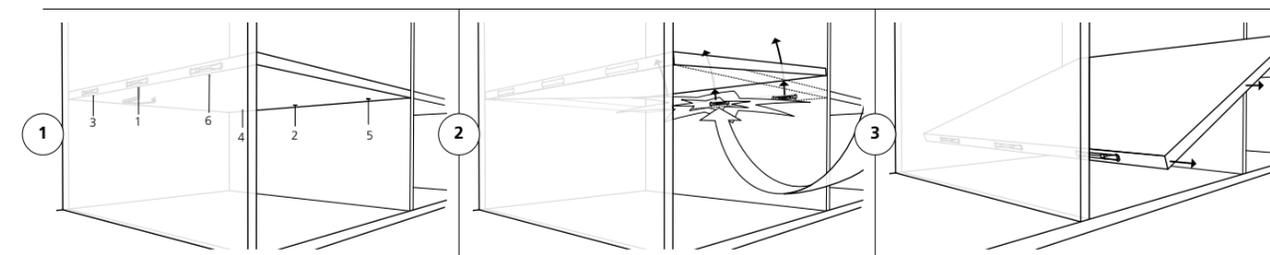

Technical data

Joining methods

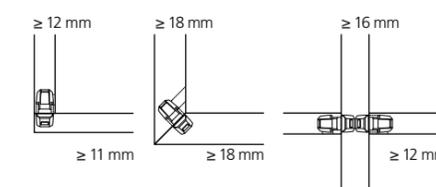

Size	64 × 13.5 × 9.7 mm 52 × 7.5 × 9.7 mm		
Cutter	Ø 100.4 × 7 × Ø 22 mm		
Material connector	Fiberglass reinforced plastic		
Material of lever	Zinc die cast		
Installation tolerance	Long. ± 0 mm/radial ± 1 mm		
Tensile strength (N) Up to	MDF 790 ¹	Particle board 710 ¹	Beech 1190 ¹
Material range	Particle board, MDF, plywood, softwood, hardwood etc.		

See PAGE 75 for technical specifications | 90° and 45° cover caps are available in a variety of colours PAGE 172-173


¹ See technical notes on page PAGE 185

Clamex P-14 CNC

Detachable furniture connector with precise alignment



Features

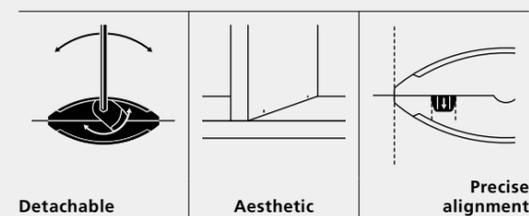

- Detachable furniture connector, installed in seconds
- CNC connector with automatic alignment for efficient assembly
- Aesthetic look with the hardly visible 6 mm access hole
- All-rounder for all angle and miter joints from 22.5° to 180°
- Ideal for furniture construction, especially for flat-pack furniture

Clamex P-14 CNC is a detachable connector and is anchored in the form-locking P-System groove within seconds. Through the minimalist 5 mm access hole, Clamex P-14 is firmly connected and disconnected using a lever. Clamex P-14 CNC is ideal for production on CNC machines and, unlike Clamex P-14, is automatically aligned during assembly. Clamex P-14 CNC is used in mitre joints from 18 mm material thickness and in butt joints from 12 mm.


Articles

	Art. No.
Clamex P-14 CNC element with lever, 2000 pieces	145388
	Art. No.
Clamex P-14 element without lever, 2000 pieces	145339
	Art. No.
Clamex P-10 element without lever, 2000 pieces	145358
	Art. No.
Clamex P-10 Medius element without lever, 2000 pieces	145369

Matching accessories starting on PAGE 170



Installation

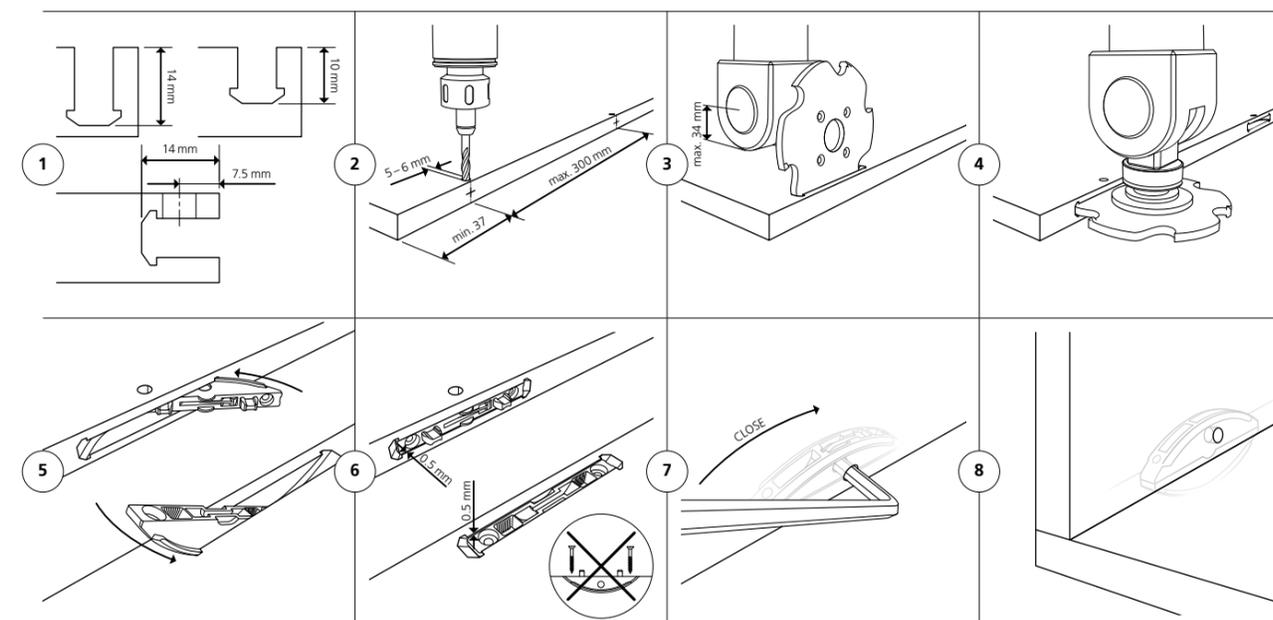

Version with CNC

Technical data


Joining methods	Size	64 × 13.5 × 9.7 mm
	Cutter	Ø 100.4 × 7 × Ø 22 mm
	Material connector	Fiberglass reinforced plastic
	Material of lever	Zinc die cast
	Installation tolerance	Long. ± 0 mm/radial ± 1 mm
	Tensile strength (N)	Depending on the connector combination
	Material range	Particle board, MDF, plywood, softwood, hardwood etc.
	Up to	

See PAGE 75 for technical specifications | 90° and 45° cover caps are available in a variety of colours PAGE 172-173

¹ See technical notes on page PAGE 185

Advantages of the Clamex P

Detachable furniture connector

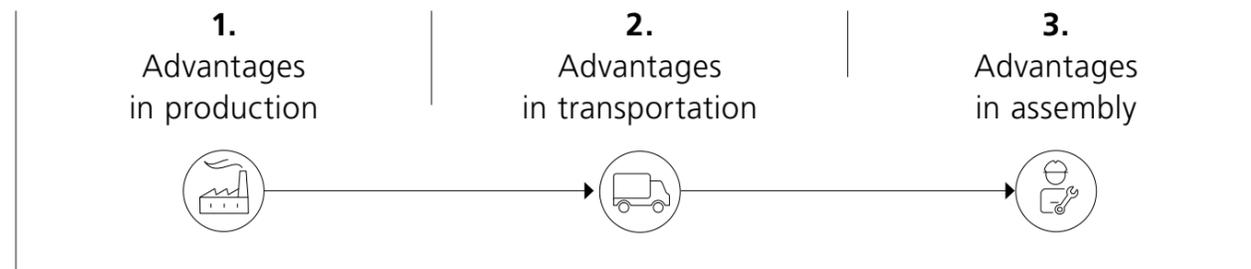

- Machining possible with Zeta P2 or CNC machinery
- Only one tool change from P-System cutter to 6 mm drill
- Same groove everywhere: whether corner connection, shelf, centre panel or mitres
- Consistently competent partners: from CAD to CAM and CNC

- Tool-free connector installation
- Workpieces with pre-installed P-System connectors are stackable for storage and transport
- No extra bags or loose hardware required with furniture shipment
- Tool-free connector disassembly for surface treatment


- Simple positioning of workpieces thanks to positioning pins
- Easy assembly with an Allen key
- Aesthetically small, barely visible hole (Ø = 6 mm)
- Open the connection time and time again with the rotating lever
- Lateral tolerance perfect, flush alignment of both workpieces




1. Machining with a Zeta P2 or CNC machine




2. Only one tool change




3. Tool-free connector installation



4. Flat pack delivery



5. Versatile for all angles and joining situations



6. Strong and detachable connection



« The P-System saves us an enormous amount of time in production. Our fitters are big fans of Clamex and now they don't want to work with anything else. »


Markus Fust, Managing Director,
Fust Schreinerei AG, Wil, Switzerland

Bisco P

Aligning element, suitable for the P-System groove



Features

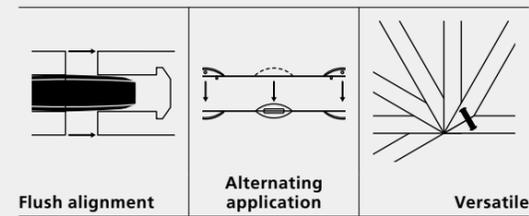

- Plastic element for Clamex P and Tenso P
- Align furniture parts flush together with Clamex P
- Before gluing with Tenso P, check furniture for quality control with Bisco P
- All angle and miter joints from 22.5° to 180°
- Bisco P-10 from material thickness 12 mm, Bisco P-14 from 16 mm

Bisco P is a plastic biscuit which fits into the 7 mm P-System groove and is held in the groove due to its surface structure. Bisco P is used in combination with Clamex or Tenso as a cost-effective alignment element and ensures flushness of the joint. The Bisco can also be used as a dry joint as a test before the work piece is permanently joined with Tenso P and adhesive. Bisco P-14 is used in combination with Clamex P-14 or Tenso P-14; and Bisco P-10 with the same connectors in size P-10.


Articles

	Art. No.
Bisco P-14, 80 pieces	145301
Bisco P-14, 300 pieces	145302
Bisco P-14, 1000 pieces	145303
	
Bisco P-10, 80 pieces	145304
Bisco P-10, 300 pieces	145305



Matching accessories starting on PAGE 170



Installation

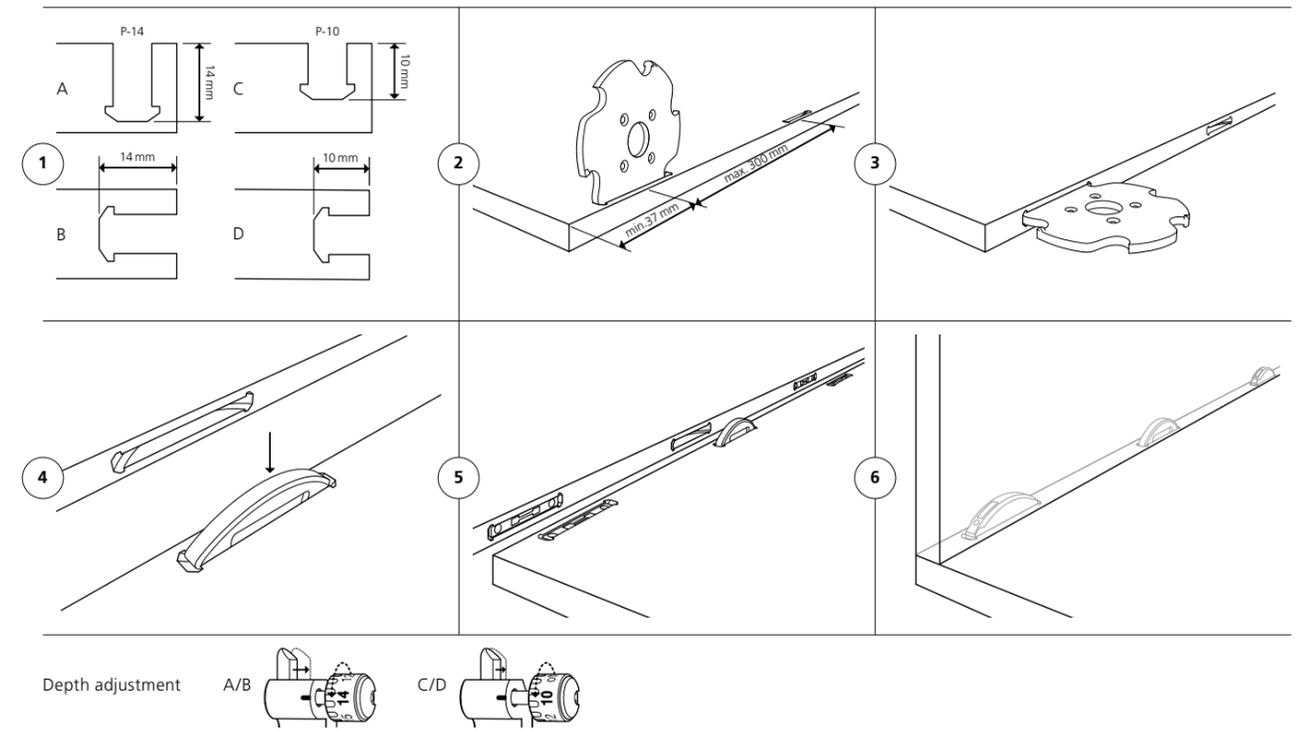

Technical data

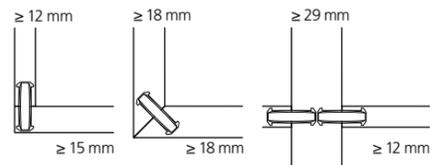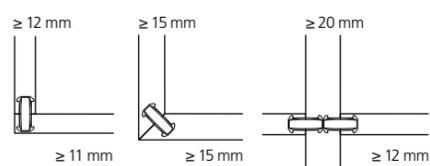Joining methods	Bisco P-14
	Size: 65 × 27 × 7 mm
	Cutter: Ø 100.4 × 7 × Ø 22 mm
	Material connector: Plastic
	Installation tolerance: Long. ± 2 mm
	Tensile strength (N): Depending on the connector combination
Joining methods	Bisco P-10
	Size: 52 × 19 × 7 mm
	Cutter: Ø 100.4 × 7 × Ø 22 mm
	Material connector: Plastic
	Installation tolerance: Long. ± 2 mm
	Tensile strength (N): Depending on the connector combination
	Material range: Particle board, MDF, plywood, softwood, hardwood etc.


See PAGE 76 for technical specifications

Tenso P-14

Self-clamping connector for glueing materials from 16 mm thickness



Features

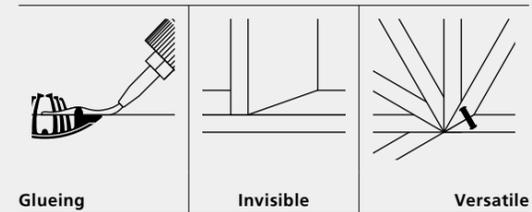

- Self-clamping connector for glueing, installed in seconds
- Invisible connection for maximum aesthetics
- Pretensioning function, ideal for miters and connection situations from 22.5° to 180°
- High clamping force for perfectly clamped joints without screw clamps and shims
- Gluing aid for a wide range of applications in furniture or interior design

Tenso P-14 is a self-clamping glueing aid and is anchored in the form-locking P-System groove within seconds. The high clamping force of Tenso leads to perfectly clamped joints without the need for clamps or presses, regardless of the angle of the work pieces. Aesthetic joining is possible without visible connectors, with short assembly times and without the need to wait for the glue to dry. Tenso P-14 is used on mitre joints from 18 mm material thickness and in butt joints from 15 mm.

Articles



Art. No.

Tenso P-14, 80 pairs	145415
Tenso P-14, with preload clip, 80 pairs	145415S
Tenso P-14, 300 pairs	145425
Tenso P-14, with preload clip, 300 pairs	145425S
Tenso P-14, 1000 pairs	145435
Tenso P-14 element with spring, 2000 pieces	145440
Tenso P-14 element without spring, 2000 pieces	145441




Tenso P-14 preload clip, 300 pieces	145426
Tenso P-14 preload clip, 1000 pieces	145436


Matching accessories starting on PAGE 170



Installation

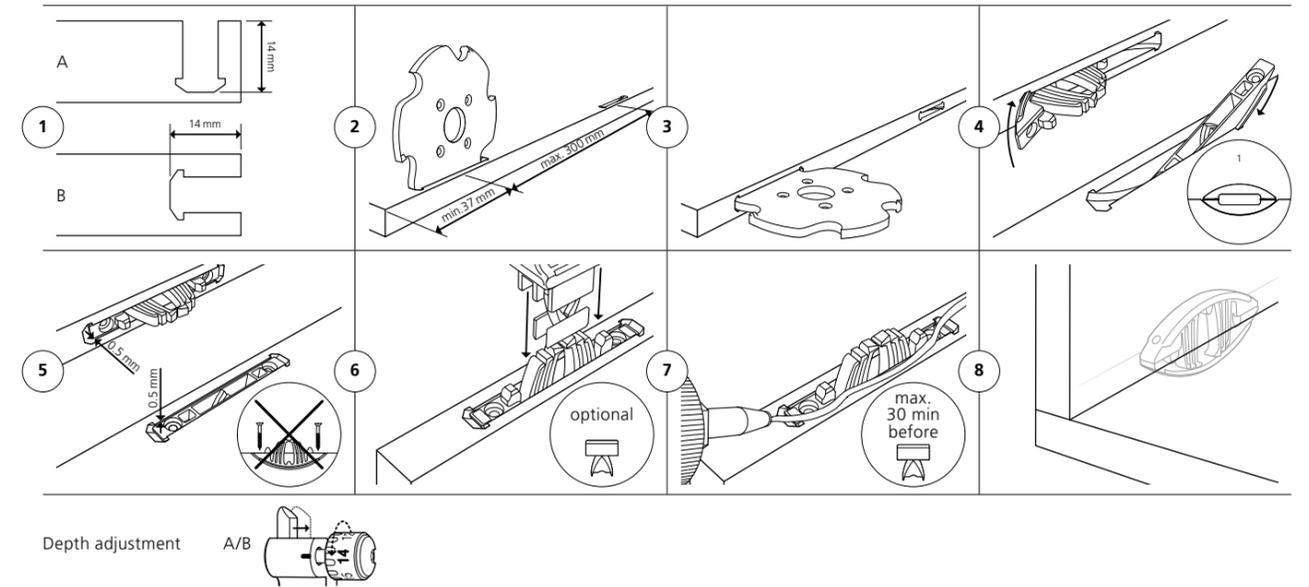

Offset installation

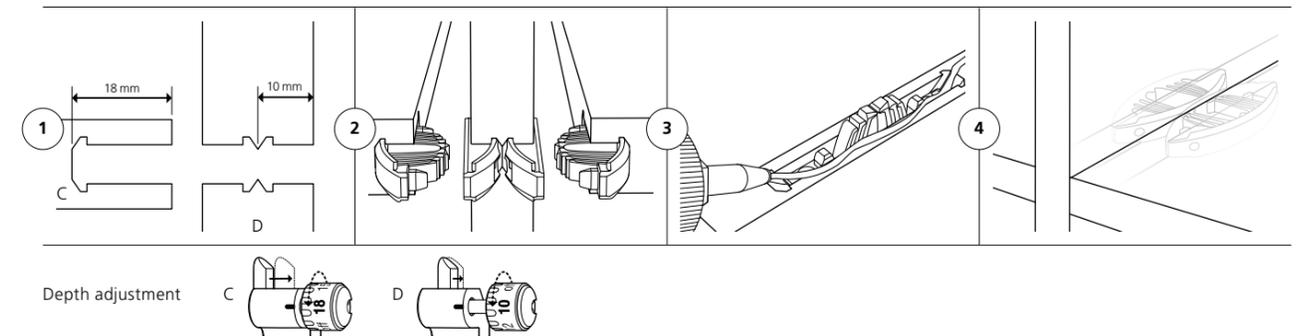

Technical data

Joining methods	Size	66 × 27 × 9.7 mm
≥ 12 mm	Cutter	Ø 100.4 × 7 × Ø 22 mm
≥ 18 mm	Material connector	Fiberglass reinforced plastic
≥ 19 mm	Installation tolerance	Long. ± 1 mm/radial ± 1 mm
≥ 15 mm	Tensile strength (N)	Depending on the adhesive
≥ 18 mm	Material range	Particle board, MDF, plywood, softwood, hardwood etc.
≥ 12 mm		


See PAGE 77 for technical specifications | ¹ Note: The aligning element Bisco P-14 is ideal to dry-assemble the joints before glueing.

Tenso P-10

Self-clamping connector for glueing thin materials from 12 mm thickness



Features

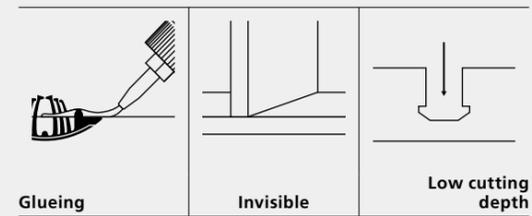

- Self-clamping connector for glueing, installed in seconds
- For miters from 15 mm and butt joints from 12 mm material thickness
- Invisible connection for maximum aesthetics
- Pretensioning function, ideal for miters and connection situations from 22.5° to 180°
- Gluing aid for a wide range of applications in furniture or interior design

Tenso P-10 is a self-clamping connector to glue and is anchored in the form-locking P-System groove within seconds. The high clamping force of Tenso leads to perfectly clamped joints without clamps or presses, regardless of the angle of the work pieces. Aesthetic joining is possible without visible connectors, with short assembly times and without having to wait or the glue to dry. Tenso P-10 is used on mitre joints from 15 mm material thickness and in butt joints from 12 mm.

Articles



Art. No.

Tenso P-10, with preload clip, 80 pairs	145418
Tenso P-10, with preload clip, 300 pairs	145428
Tenso P-10, with preload clip, 1000 pairs	145438
Tenso P-10 element with spring, 2000 pieces	145442
Tenso P-10 element without spring, 2000 pieces	145443




Tenso P-10 preload clip, 2000 pieces	145445
--------------------------------------	---------------



Matching accessories starting on PAGE 170



Installation

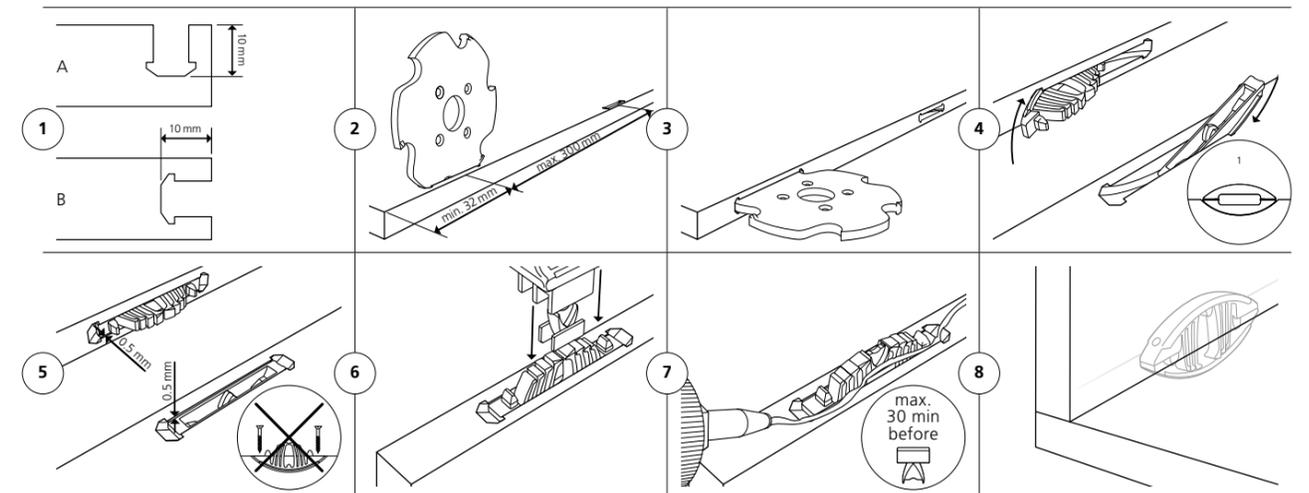

Offset installation

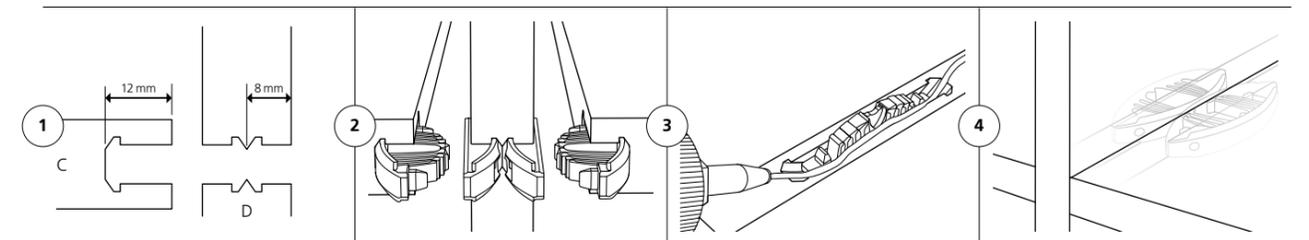

Technical data

Joining methods	Size	52 × 19 × 9.7 mm
≥ 12 mm	Cutter	Ø 100.4 × 7 × Ø 22 mm
≥ 15 mm	Material connector	Fiberglass reinforced plastic
≥ 16 mm	Installation tolerance	Long. ± 1 mm/radial ± 1 mm
≥ 11 mm	Tensile strength (N)	Depending on the adhesive
≥ 15 mm	Material range	Particle board, MDF, plywood, softwood, hardwood etc.
≥ 12 mm		


See PAGE 77 for technical specifications | ¹ Note: The aligning element Bisco P-10 is ideal to dry-assemble the joints before glueing.

Divario P-18

Self-clamping, invisible connector for slide insertion



Features

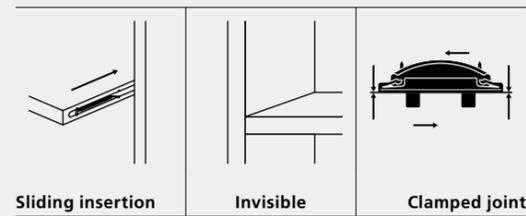

- Furniture connectors for subsequent insertion of shelves or partitions
- Quick assembly on site – insert. Done.
- Divario P-18 tensions the joint perfectly during insertion
- Invisible connection for maximum aesthetics
- Ideal for wall units, wine racks, large pieces of furniture, flat-pack furniture

Divario P-18 is a detachable connector for slide-in insertion and is anchored in the form-locking P-System groove within seconds. The connector is used to slide shelves or partitions into an already assembled cabinet. In the process, the Divario P-18 clamps the workpieces together firmly and ensures perfectly closed joints without visible connectors. Divario P-18 is used for joining shelves to divisions from 18 mm panel thickness or in butt joints from 12 mm.



Articles

		Art. No.
Divario P-18, 80 pairs	145550	
Divario P-18, 300 pairs	145560	
Divario P-18, 1000 pairs	145570	
Divario P-18 element for P-System groove, 2000 pieces	145520	
Divario P-18 element for drill holes, 2000 pieces	145540	
		125500

	145550S
Scope of delivery: 80 pair Divario P-18, Divario installation tool, marking jig plastic	
	145552
Kit contains: 80 pairs Divario P-18, Divario installation tool, marking jig metal	


Matching accessories starting on PAGE 170

Installation

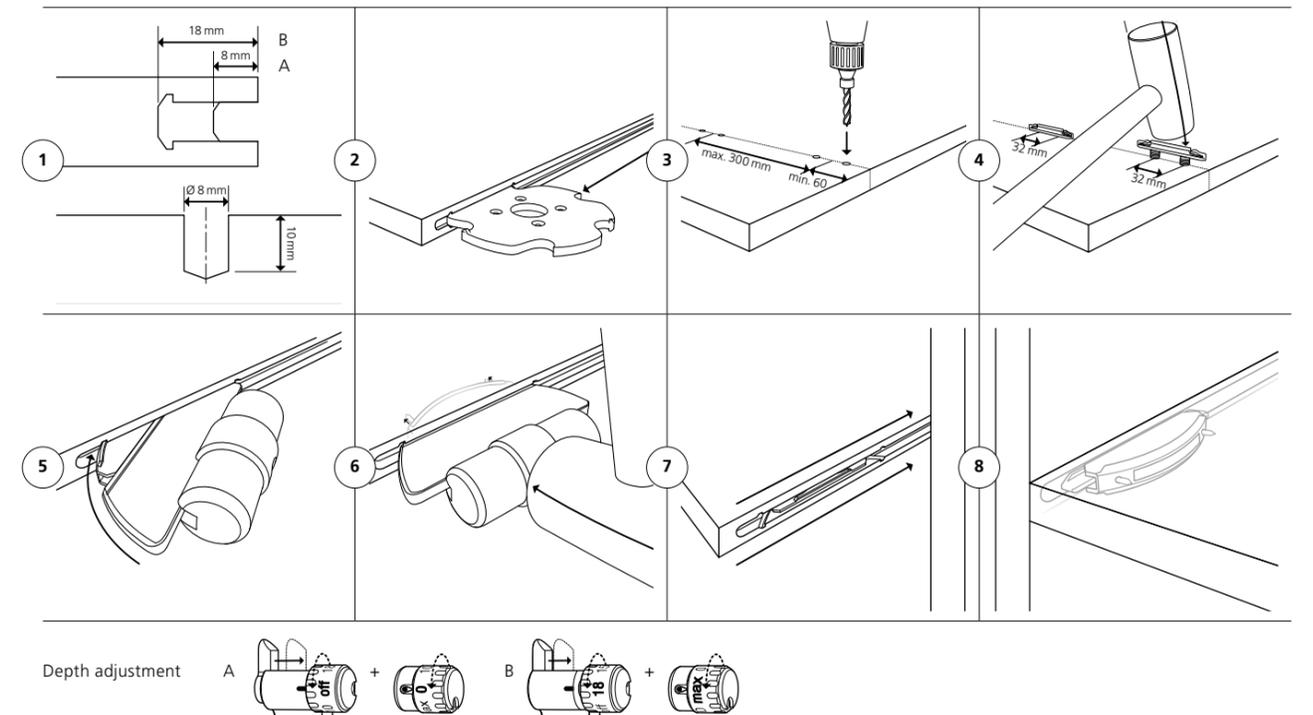

Technical data

Joining methods	Element with P-System groove	58 x 16 x 9.7 mm
	Element with drill holes	72 x 17 x 8 mm
	Cutter	Ø 100.4 x 7 x Ø 22 mm
	Material connector	Fiberglass reinforced plastic
	Installation tolerance	Long. ± 1 mm/radial ± 0 mm
	Load limits per connector (N)	19 mm
	Up to	MDF 740 ¹ Particle board 590 ¹ Beech 1820 ¹
	Tensile strength (N)	All materials 600 ¹
	Material range	Particle board, MDF, plywood, softwood, hardwood etc.

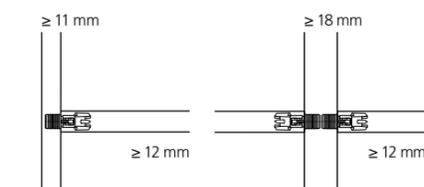


LC P-16 connector for lightweight construction

New possibilities in lightweight construction with the P-System



LC P-16 is a connector that combines the advantages of lightweight construction with the efficient and aesthetic Clamex connection. Due to its width, the LC P-16 is anchored in the surface layers and acts as an adapter into which a Clamex P-14 connector is slid in.

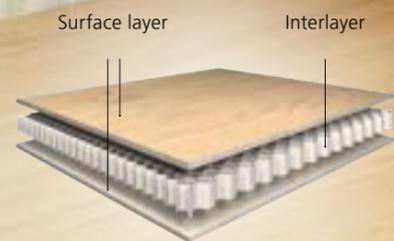


Lightweight construction stands for innovative designs that offer maximum stability and functionality with minimal use of materials. At a time when sustainability and resource conservation are becoming increasingly important, lightweight construction plays a central role. The use of intelligent materials and innovative technologies not only reduces weight and costs, but also protects the environment. Whether in the furniture industry, interior fittings or vehicle construction – lightweight construction enables flexible, resilient and sustainable solutions. It opens up new design possibilities and promotes efficient, future-oriented construction.

Advantages in the manufacturing process

The LC P-16 lightweight connector significantly improves the machining and assembly process. The time-consuming use of a concealed timber edge is eliminated, which speeds up the production process and also saves material. The simple assembly – the connector is simply slid in – completely eliminates waiting times due to glueing. The result is a fast, smooth process that reduces time and costs in both manufacturing and assembly without compromising on aesthetics, stability and quality.


Cabinet with concealed timber edge

Processing time per cabinet

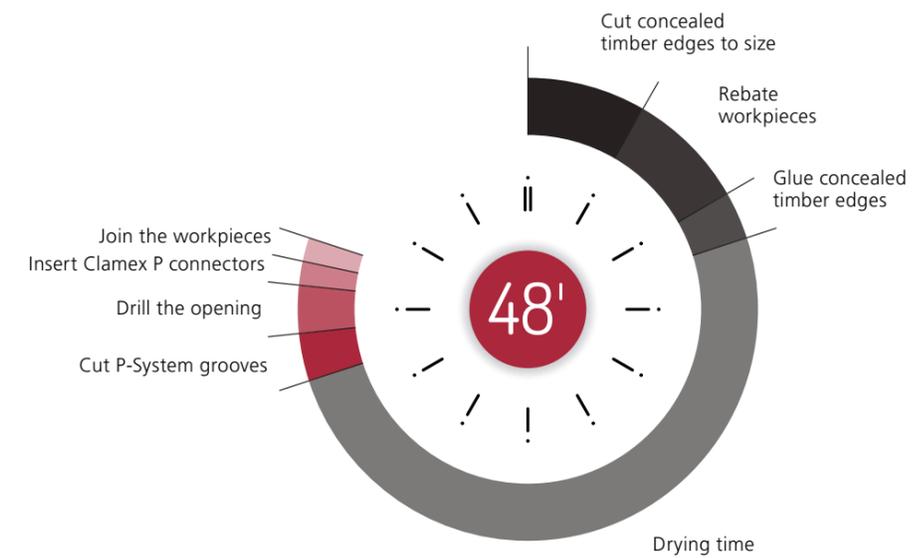

Cabinet with LC P-16

Processing time per cabinet

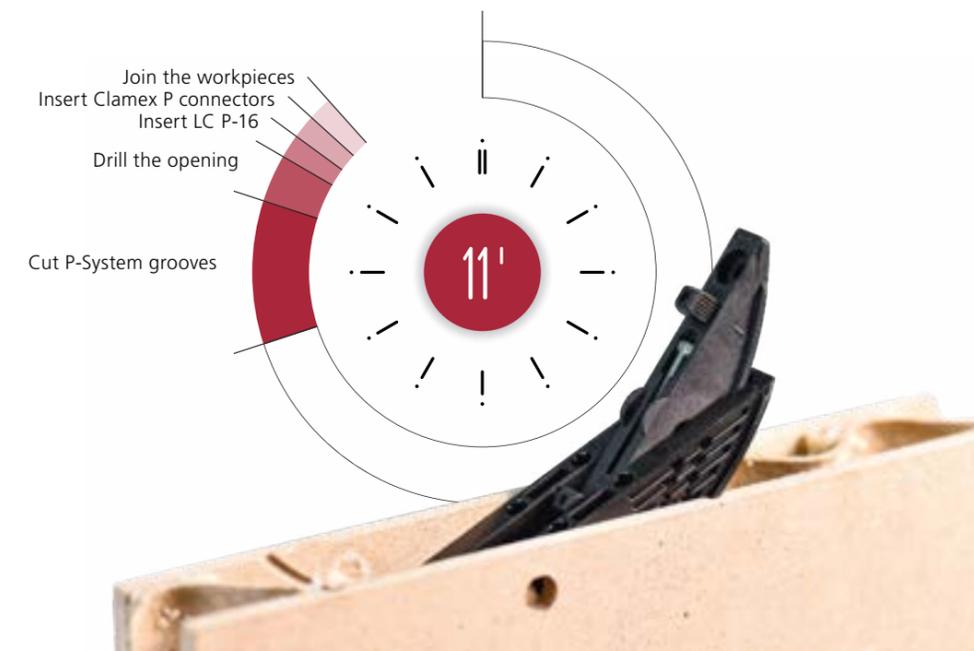


LC P-16

Joining system for lightweight panels without the need for concealed timber edges



Features

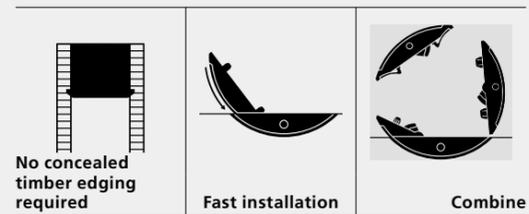

- P-System joint for lightweight materials and speedy installation
- Strong anchorage in the surface layers without concealed timber edges
- Three product sizes for use with all common material thicknesses
- Enables the use of the detachable Clamex P family
- Ideal for furniture and assemblies in lightweight construction, caravans and shipbuilding


The LC P-16 is a P-System joint for lightweight panels. It is securely anchored in the surface layer by its profile. The integrated P-System groove makes it possible to slide in Clamex P connectors without the time-consuming use of concealed timber edges or glues. Machining with two to three machining steps is carried out either with the Zeta P2 or, even more efficiently, with the CNC machining centre. Thanks to the three sizes of the LC P-16, detachable connections in various lightweight panels are possible.

Articles

	interzum AWARD 2025 High Product Quality
	Art. No.
LC P-16 x 11, 80 pieces	145710
LC P-16 x 11, 1000 pieces	145711
LC P-16 x 11 Set, 80 pieces, incl. Clamex P-14/10	145712
	
LC P-16 x 17, 80 pieces	145720
LC P-16 x 17, 1000 pieces	145721
LC P-16 x 17 Set, 80 pieces, incl. Clamex P-14/10	145722
	
LC P-16 x 22, 80 pieces	145730
LC P-16 x 22, 1000 pieces	145731
LC P-16 x 22 Set, 80 pieces, incl. Clamex P-14/10	145732


	
LC P-16 Starter Set	145700
Scope of delivery: 20 x LC P-16 x 11, 20 x LC P-16 x 17, 20 x LC P-16 x 22, 20 pairs Clamex P-14/10, 1 piece positioning clip, 1 piece element insert Clamex P-16, 1 piece depth adjuster cap 2 mm, 1 piece allen key, SW 4 mm, 75 x 55 mm	

Installation

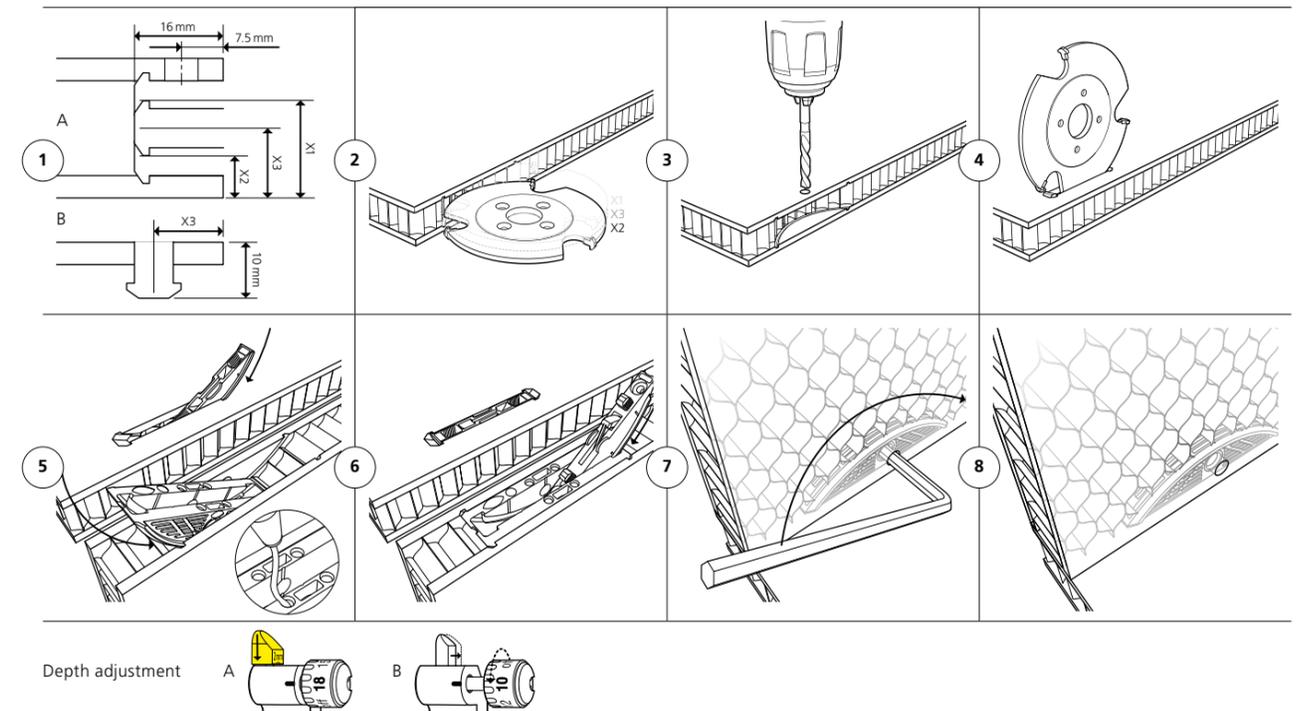

Technical data

Joining methods

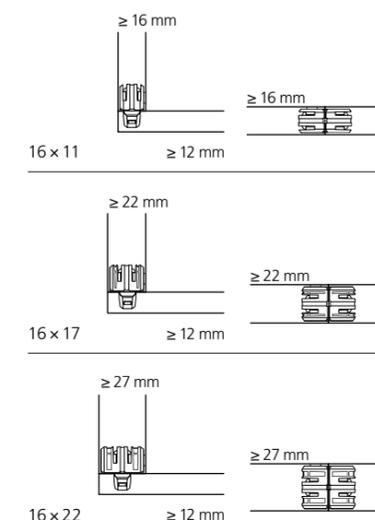

Size 16 x 11	71.4 x 15.3 x 13.6 mm	
Size 16 x 17	71.4 x 15.3 x 19.6 mm	
Size 16 x 22	71.4 x 15.3 x 24.6 mm	
Cutter	Ø 100.4 x 7 x Ø 22 mm	
Material connector	Fiberglass reinforced plastic	
Installation tolerance	Long. ± 1.0 mm/radial ± 1.0 mm	
Tensile strength 90° (N) Up to	Surface layer / Interlayer: MDF / Corrugated wood fibre Particle board / Cardboard honeycomb	
LC size / Surface layer thickness:		
LC P-16 x 11 / 4 mm	680 ¹	460 ¹
LC P-16 x 17 / 4 mm	670 ¹	410 ¹
LC P-16 x 22 / 8 mm	1100 ¹	870 ¹
Material range	Lightweight materials, particle board, MDF, softwood etc.	

LC P-16 installation information

Machining with Zeta P2

The LC P-16 is fixed in the surface layers of the lightweight panel using the P-System anchoring. Machining can be carried out with a CNC machining centre or with the Zeta P2. Depending on the size of the surface layer, two to three milling operations are required to achieve the required groove width, as the LC P-16 is wider than a P-System connector. The machining process for an LC P-16 x 11 with the Zeta P2 is as follows:



Position the angle stop and cut the first groove



Drill 6 mm access hole



Align the Zeta P2 in the hole using the positioning clip and cut the next groove*



Inserting the LC P-16



Slide Clamex P-14 into LC P-16 and Clamex P-10 connector half into the surface.



Connect the workpieces – finished!

Choosing the right connector size

The LC P-16 lightweight connector is available in three sizes. This enables joints in the most common lightweight panels

LC P-16 x 11



Panel thickness / surface layer
19 mm / 4 mm

LC P-16 x 17



Panel thickness / surface layer
25 mm / 4 mm

LC P-16 x 22



Panel thickness / surface layer
30 mm / 4 mm
38 mm / 8 mm



The LC P-16 configurator is available for selecting the correct connector for other material or surface layer thicknesses. Based on the panel thickness and thickness of the interlayer or surface layer, the configurator determines whether the installation of the LC P-16 is possible, which sizes can be used and which cutting position is ideal.

Versatile applications with LC P-16

Furniture-making



Robust, aesthetic joints between lightweight panels that combine design and functionality. Perfect for large wall units, cupboards, suspended sideboards or dining tables.

Interior fitting



Strong joints of lightweight panels for modern interior solutions. Ideal for butt joints of wall panels, ceiling elements, reception counters, floating shelves or separation walls.

Kitchen manufacturing



Weight reduction for carcasses, wall-mounted cabinets or high cabinets. Ideal for private kitchen installations.

Shopfitting and trade fair construction



Strong, detachable joint of lightweight panels for fixed or temporary structures. The solution for wall panels, free-standing furniture or exhibition furniture.

Caravan and vehicle interior fittings



Strong, aesthetic joints for lightweight materials when low weight is critical. Ideal for interior fitting and furniture construction.

Boat interiors



Removable joints with lightweight panels in small rooms. Transport the disassembled furniture parts through the narrow entrance and assemble it efficiently and stably inside the boat.

High performance without cable

Lamello – partner in the Cordless Alliance System.

Ludwig Bauer, Head of Inspiration

«With the lightweight, powerful 18 V LiHD 4.0 Ah battery pack, the Zeta P2 cordless is ideally equipped to cut longitudinal grooves for the Divario P-18 – even in solid wood.»



CAS. The multi-brand battery system.

More than 40 powerful manufacturers have joined forces so that tools, battery packs, and chargers are 100% compatible with each other. CAS battery packs are developed in Germany and perform well even in the most demanding applications thanks to leading battery pack technology.

One battery pack, many advantages.

- Clear cost advantages
- High investment security
- 40 years of battery pack experience
- Compatible with 18 Volt since 2009 & in the future
- 15 million battery packs on the market



Cross-
Manufacturer



18 V
compatible



Fits in over
400 tools

Find out more at:
www.cordless-alliance-system.com



LiHD 4.0 Ah battery pack

The unique 4.0 Ah battery pack with a single cell row and thus

- considerably flatter than a standard Li-Ion 4.0 Ah battery pack
- significantly lighter
- better handling thanks to less weight and size
- the perfect battery for Lamello cordless biscuit joiner machines and all cordless drill drivers, cordless impact drivers and impact wrenches.



More flexible in the workshop

The ready-to-hand battery-powered biscuit joiner ensures greater efficiency and flexibility in the workshop.

- No tangling of the cable or the suction hose when machining large workpieces
- Cutting directly on the workpiece reduces the handling of bulky parts. There is also no need to disconnect and plug in the cable

- Quick production of furniture with different angles without complicated programming on the CNC
- Create prototypes without time-consuming machine setup. Unrestricted design freedom thanks to the wide variety of joining elements

- The cordless power tool can be used to easily adapt or add grooves in no time
- Corner connections are quickly and precisely cut directly at the work bench

Large workpieces



Fitted panels



- Easily and flexibly cut grooves in fitted panels on site, even if the furniture has been completely machined on the CNC
- Additional grooves on the longitudinal joint for fillers or pillar cladding are created extremely efficiently after fitting

Exclusive individual pieces



Roof window casing



- For renovation work, the grooves are only cut directly on site after fitting
- Cable-free work facilitates handling overhead and in hard-to-reach niches

Adapting furniture



Terrace floors




- Join components outdoors without access to a power connection
- No walkways between the processing site and the installation site, and no additional handling of the cable reel



Zeta P2 cordless

The powerful P-System biscuit joiner for cordless freedom

Features

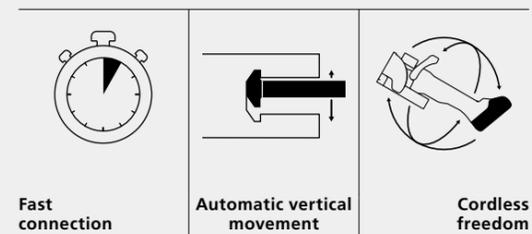

- Cordless biscuit joiner for the production of the form-locking P-System groove
- Extremely fast, time-saving joining method
 - Cut. Connect. Done.
- Maximum freedom of movement in the workshop or on the construction site
- Large range of connectors for different applications
- Same application advantages as the well-known Lamello system with wooden biscuits

The cordless Zeta P2 is the profile biscuit joiner for even faster joints, suitable for use with P-System connectors. It is used to create the form-locking P-System groove within seconds, and is even more flexible to use thanks to its battery drive. The integrated vertical mechanical drive is automatically triggered at the maximum cutting depth and performs a lateral cutter movement for the P-System groove. Connectors with various functions and different sizes can now be inserted into the form-locking P-System groove without the need for any tools.



Articles



CAS

Art. No.

Zeta P2 cordless biscuit joiner, DP, Set, in systainer, incl. batteries, charger type C Euro **101801DESD**

Zeta P2 cordless biscuit joiner, DP, in systainer, without batteries without charger **101800DESD**

Zeta P2 cordless biscuit joiner, DP, Set, in systainer, incl. batteries, charger type G **101801GBSD**

Zeta P2 cordless biscuit joiner, DP, in systainer, without batteries without charger **101800GBSD**

Kit contains: Zeta P2 cordless biscuit joiner, DP, 2 x Battery pack 18V, LiHD 4.0 Ah*, Battery charger ASC 55*, P-System drill jig incl. drill, suction stub 36 mm, spacer 2 and 4 mm, dust bag, tool set, stop square

* Only included in Art. No. 101801DESD/101801GBSD
For other plug versions please contact your local Lamello specialist




Matching accessories starting on PAGE 170




Function


90° corner and dividing panel connection

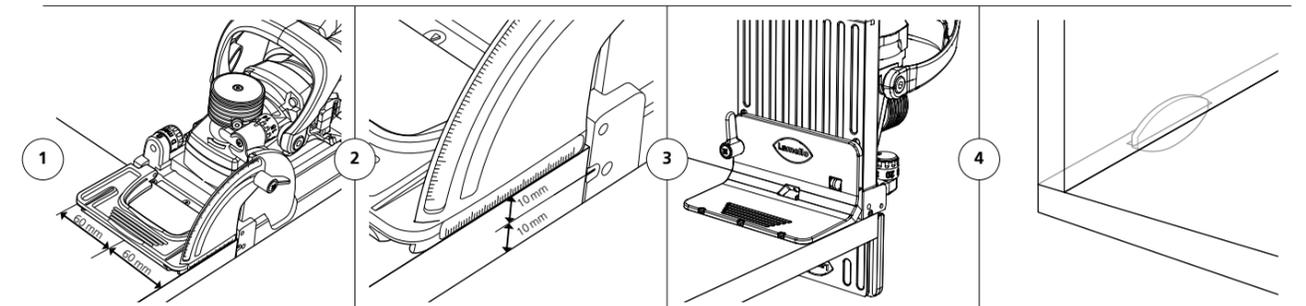

Miter connection 45° - 180° (struck from the outside)

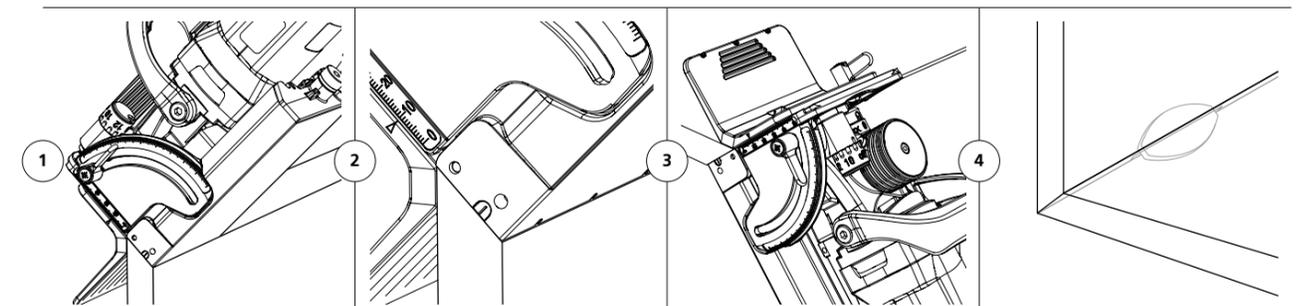

Obtuse miter connection 22.5° - 120°

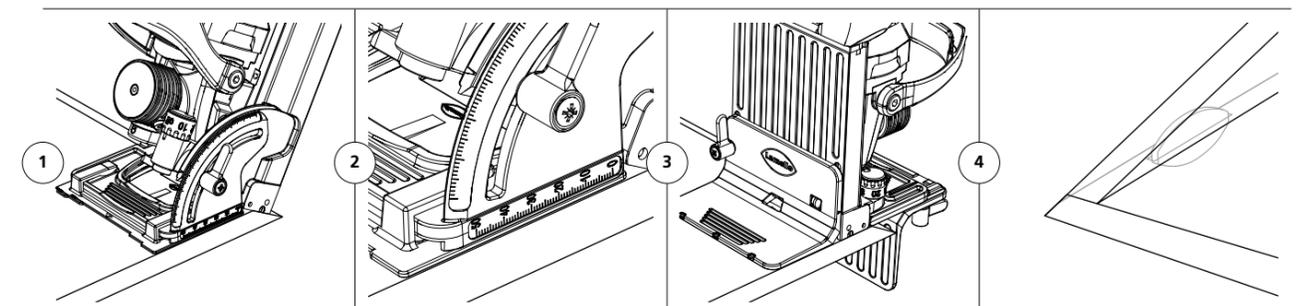

Technical data


Battery voltage	18 V	Groove width	7/10 mm
Speed	9000 min ⁻¹	Groove depth max.	20 mm
P-System Cutter	Ø 100.4 x 7 x 22 mm	Weight	3.7 kg incl. battery

Zeta P2

The machine for the evolving P-System, saving you time daily! Differentiate your products from the standard!



Features

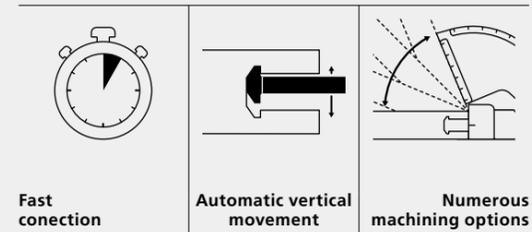

- Biscuit joiner for the production of the form-locking P-System groove
- Extremely fast, time-saving joining method
 - Cut. Connect. Done.
- Large range of connectors for different applications
- Same application advantages as the well-known Lamello system with wooden biscuits
- Precise furniture connections in all angle and connection situations

The Zeta P2 is the biscuit joiner for P-System connectors and is used to create the form-locking P-System groove within seconds. The integrated vertical mechanical drive is automatically triggered at the maximum cutting depth and performs a lateral cutter movement for the P-System groove. Connectors with various functions and different sizes can now be inserted into the form-locking P-System groove. The insertion into the groove is quick and without tools.

Articles



Art. No.

Zeta P2 biscuit joiner, HW, plug type F Schuko, **101403DES** in Systainer³ M

Zeta P2 biscuit joiner, HW, plug type G, **101403GBS** in Systainer³ M

Zeta P2 biscuit joiner, DP, plug type F Schuko, **101403DESD** in Systainer³ M

Zeta P2 biscuit joiner, DP, plug type G, **101403GBSD** in Systainer³ M

Kit contains: Zeta P2 biscuit joiner, DP, plug type C Euro, Clamex P drill jig incl. drill, adapter 36 mm, spacer 2 and 4 mm, set of tools, stop square

For other plug versions please contact your local Lamello specialist




Also available as a set (see PAGE 68)


Matching accessories starting on PAGE 170

Function


90° corner and dividing panel connection

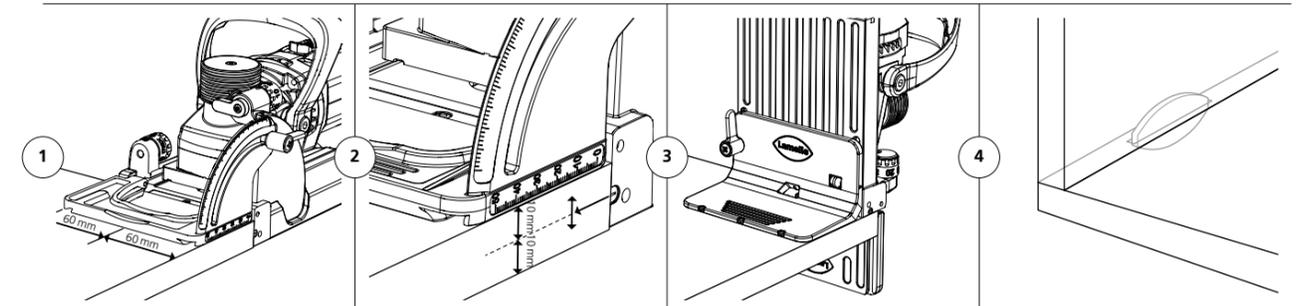

Miter connection 45° - 180° (struck from the outside)

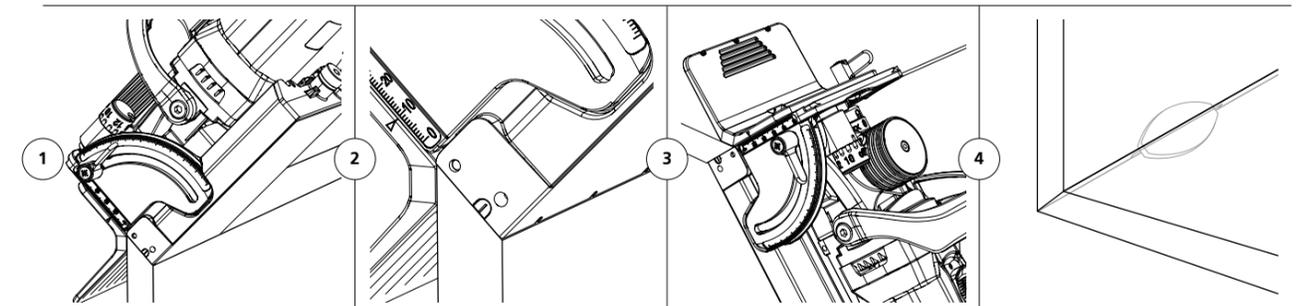


Obtuse miter connection 22.5° - 120°

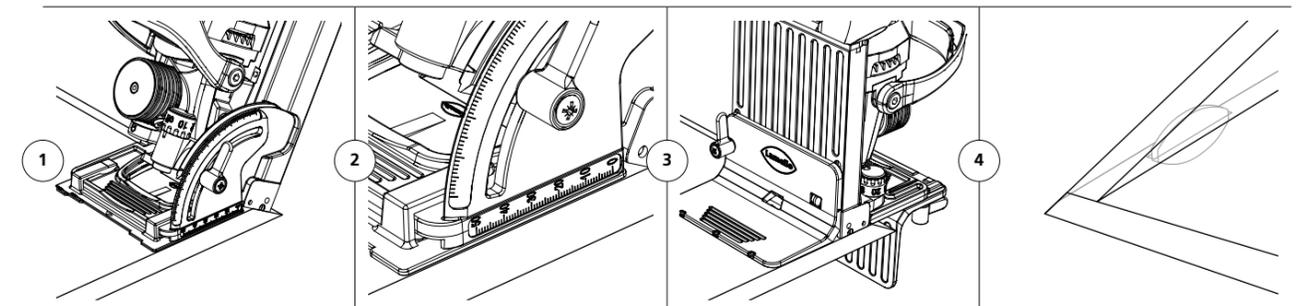

Technical data

Power/Voltage	1 050 W/230 V 800 W/120 V	Teeth	Z3
Speed	9 000 min ⁻¹	Cutting depth max.	20 mm
P-System Cutter	HW: Ø 100.9 x 7 x Ø 22 mm DP: Ø 100.4 x 7 x Ø 22 mm	Weight	3.7 kg

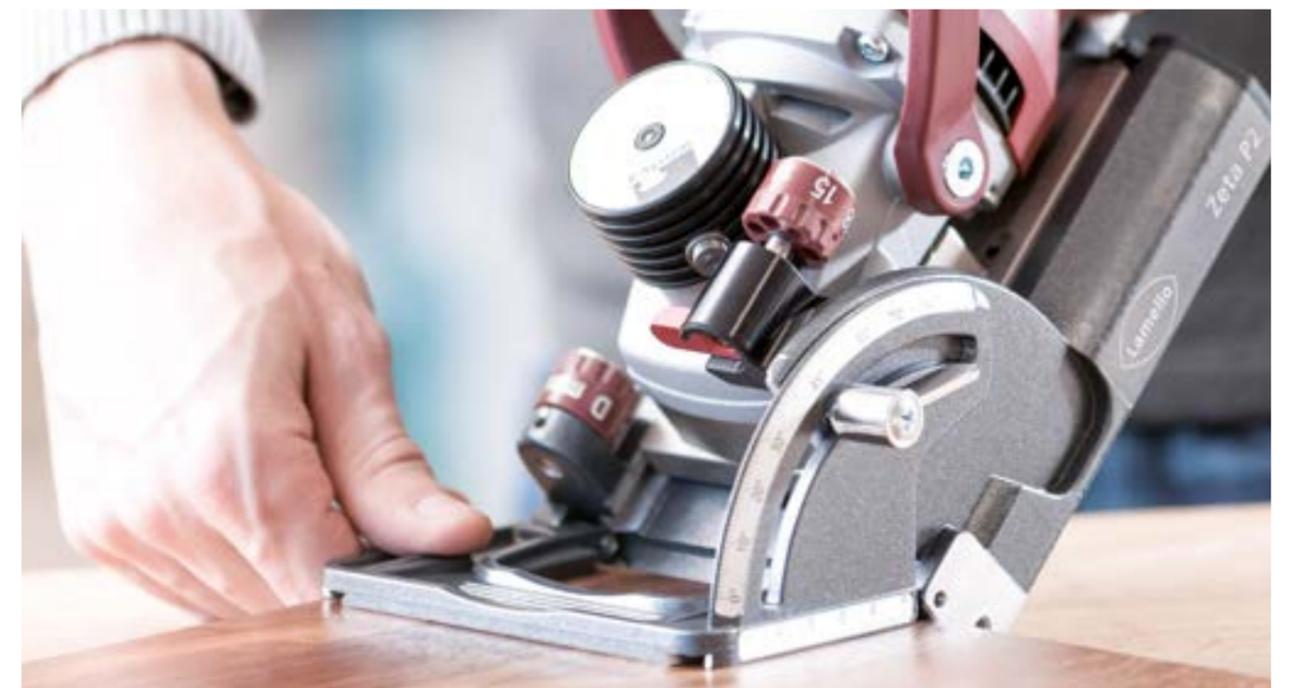

3-year Lamello warranty

Register now and benefit!

Comprehensive cover

By registering your new device online you can obtain an additional extension of your guarantee and comprehensive cover against repair costs for a total of three years from your purchase date.



Register now
on our website!

How do I register?

1. Website:
Service > Guarantee registration
2. Fill out the form online

The guarantee applies exclusively to the Lamello biscuit joiners Zeta P2, Classic X and Top 21 in selected countries. Registration must take place via the Lamello website and within 30 days of purchase from an authorised dealer.



*« Zeta P2 – for fast, easy
and precise work. »*

Jeffrey De Smet, independent carpenter, Belgium


Versatile use

With many different connecting elements




With the Zeta P2, you can quickly and easily connect parts with a range of angles and joining situations. Suitable for individual pieces of furniture as well as prototypes and line production.

With P-System groove

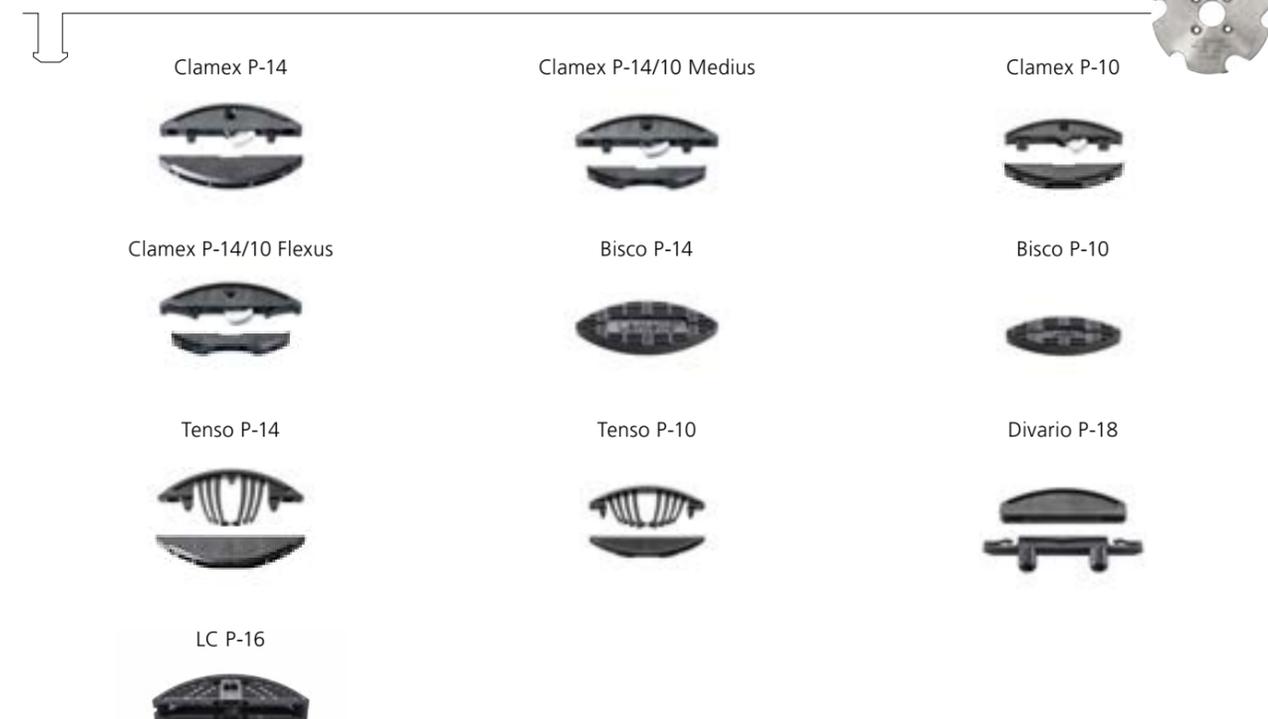

P-System depth adjustment

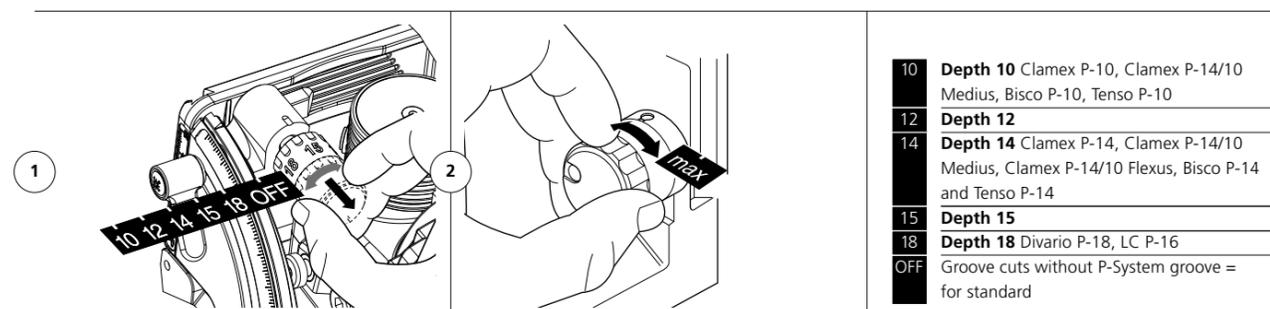


With 4 mm Lamello System groove cutter



With 3 mm Lamello System groove cutter





Lamello depth adjustment system

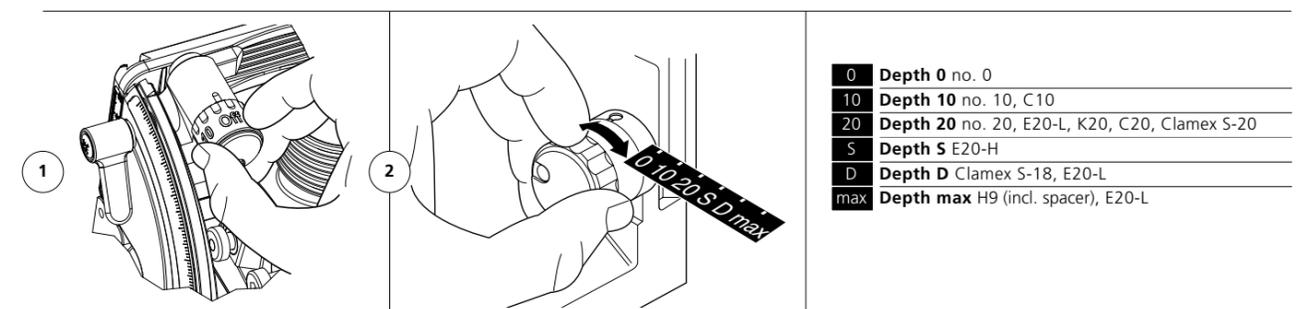



Technical information

Overview of connectors + grooves (scale 1:1)

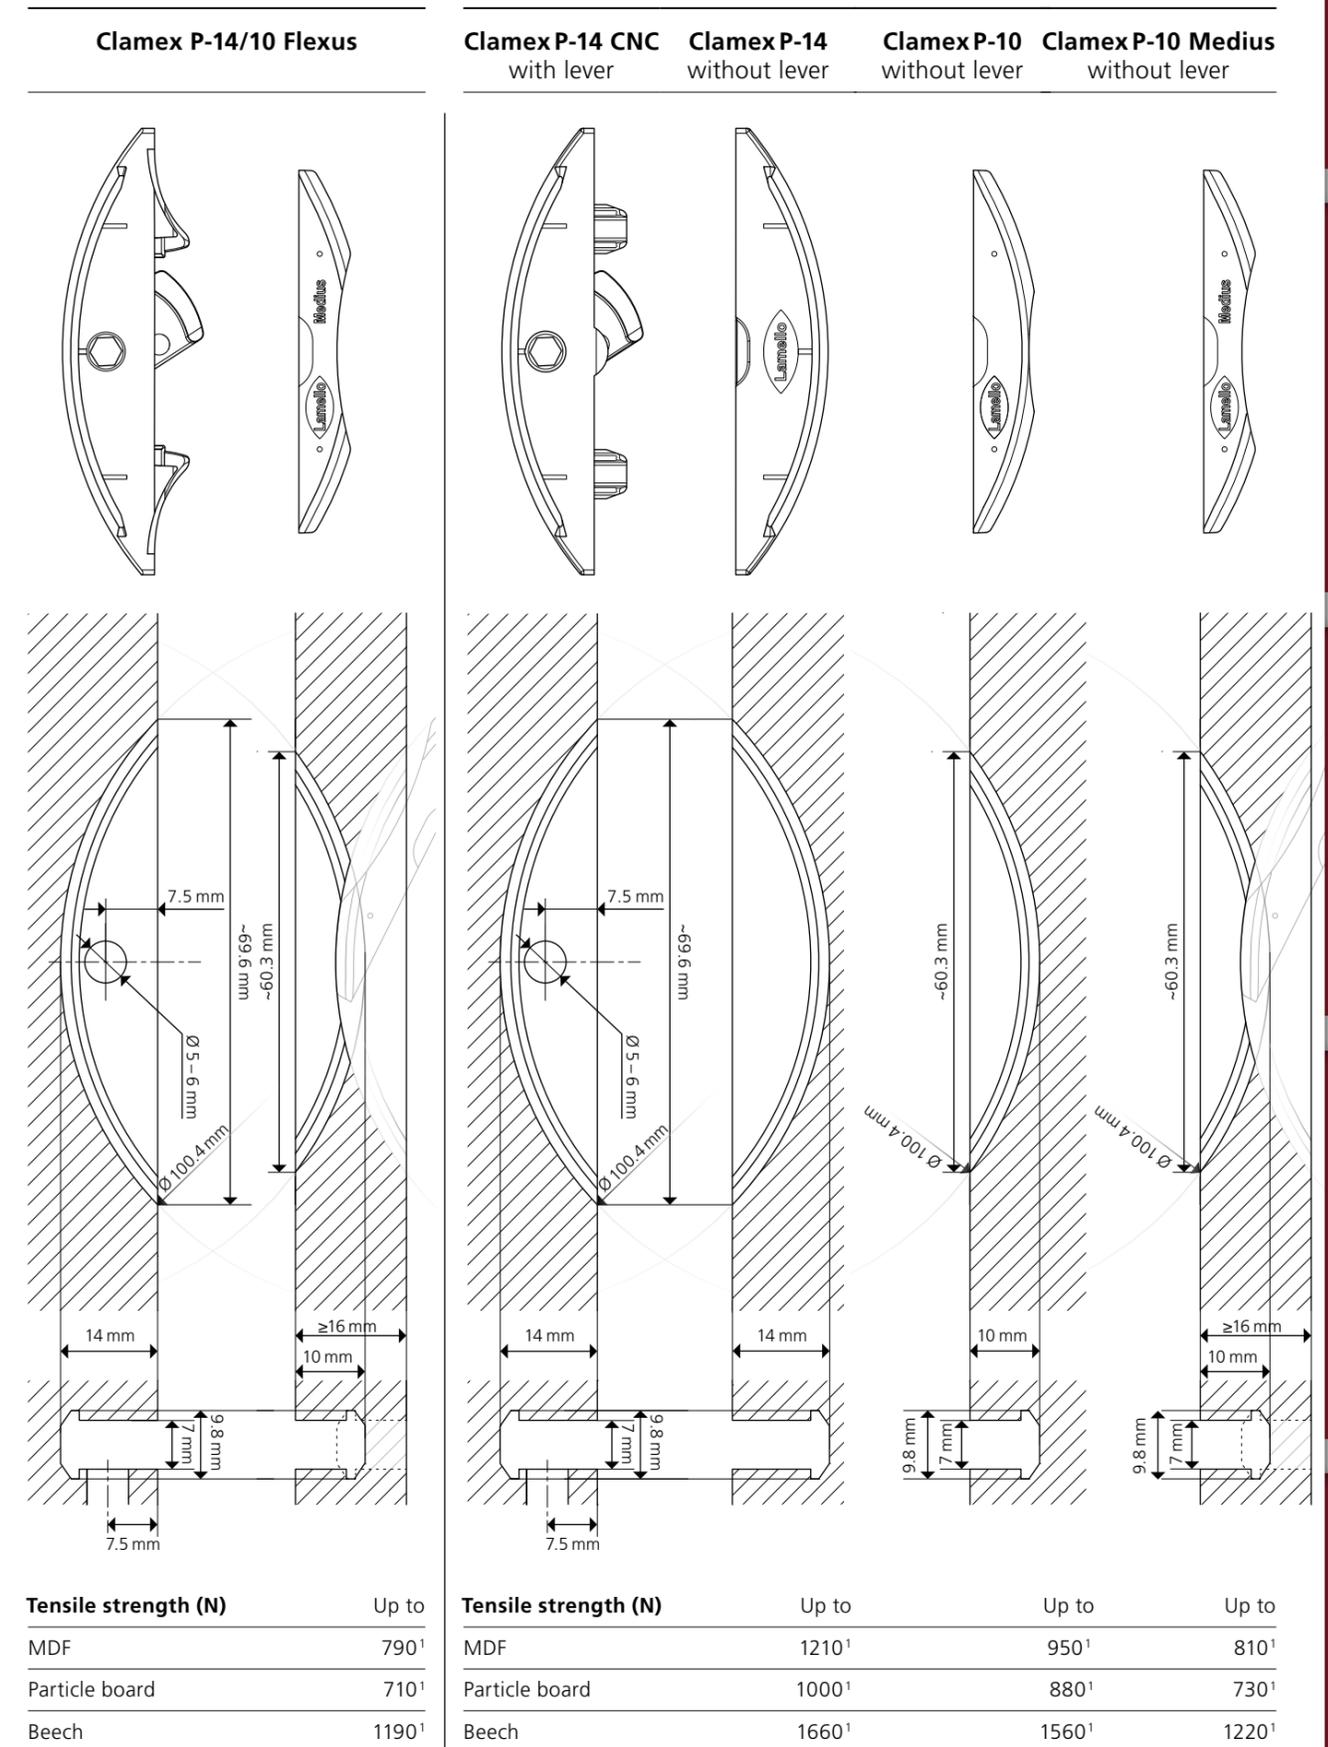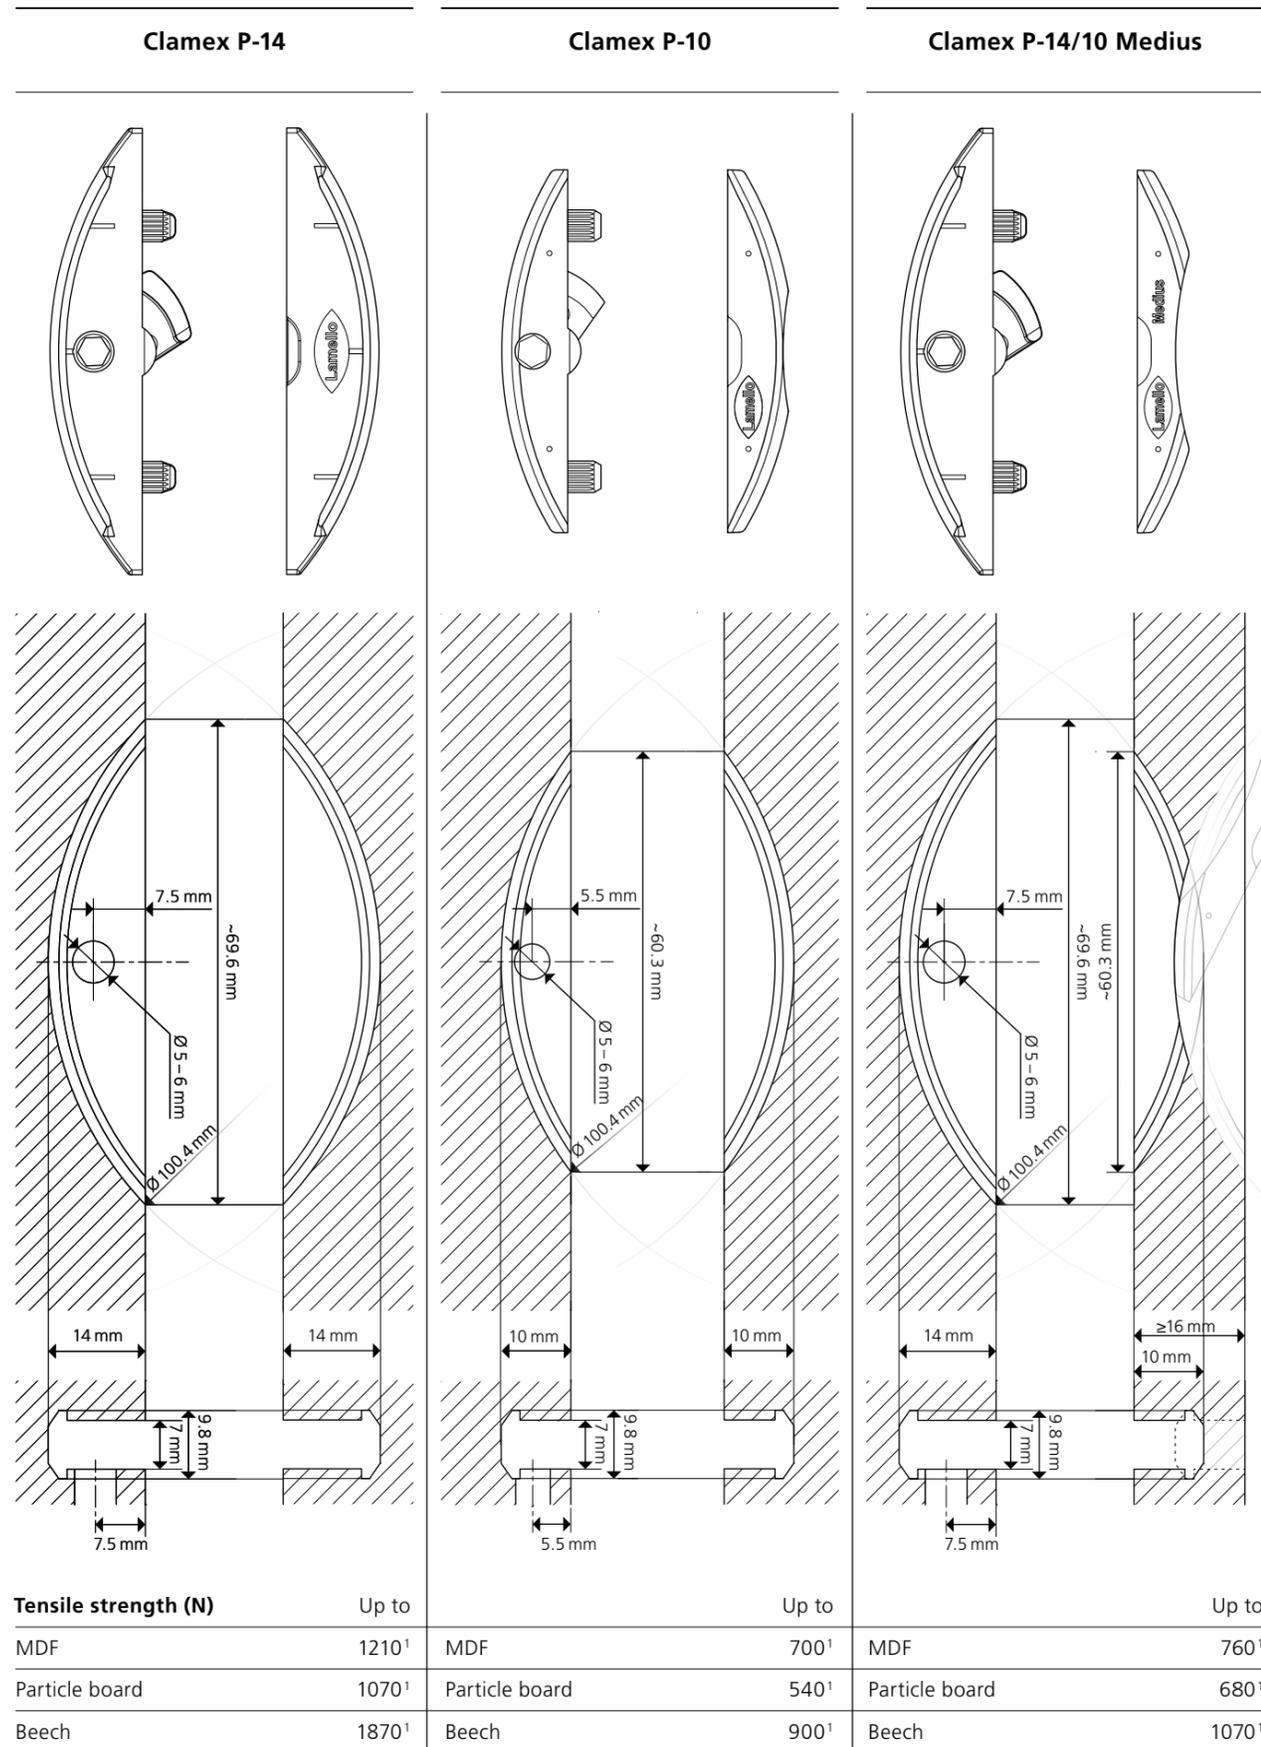

Technical information

Overview of connectors + grooves (scale 1:1)

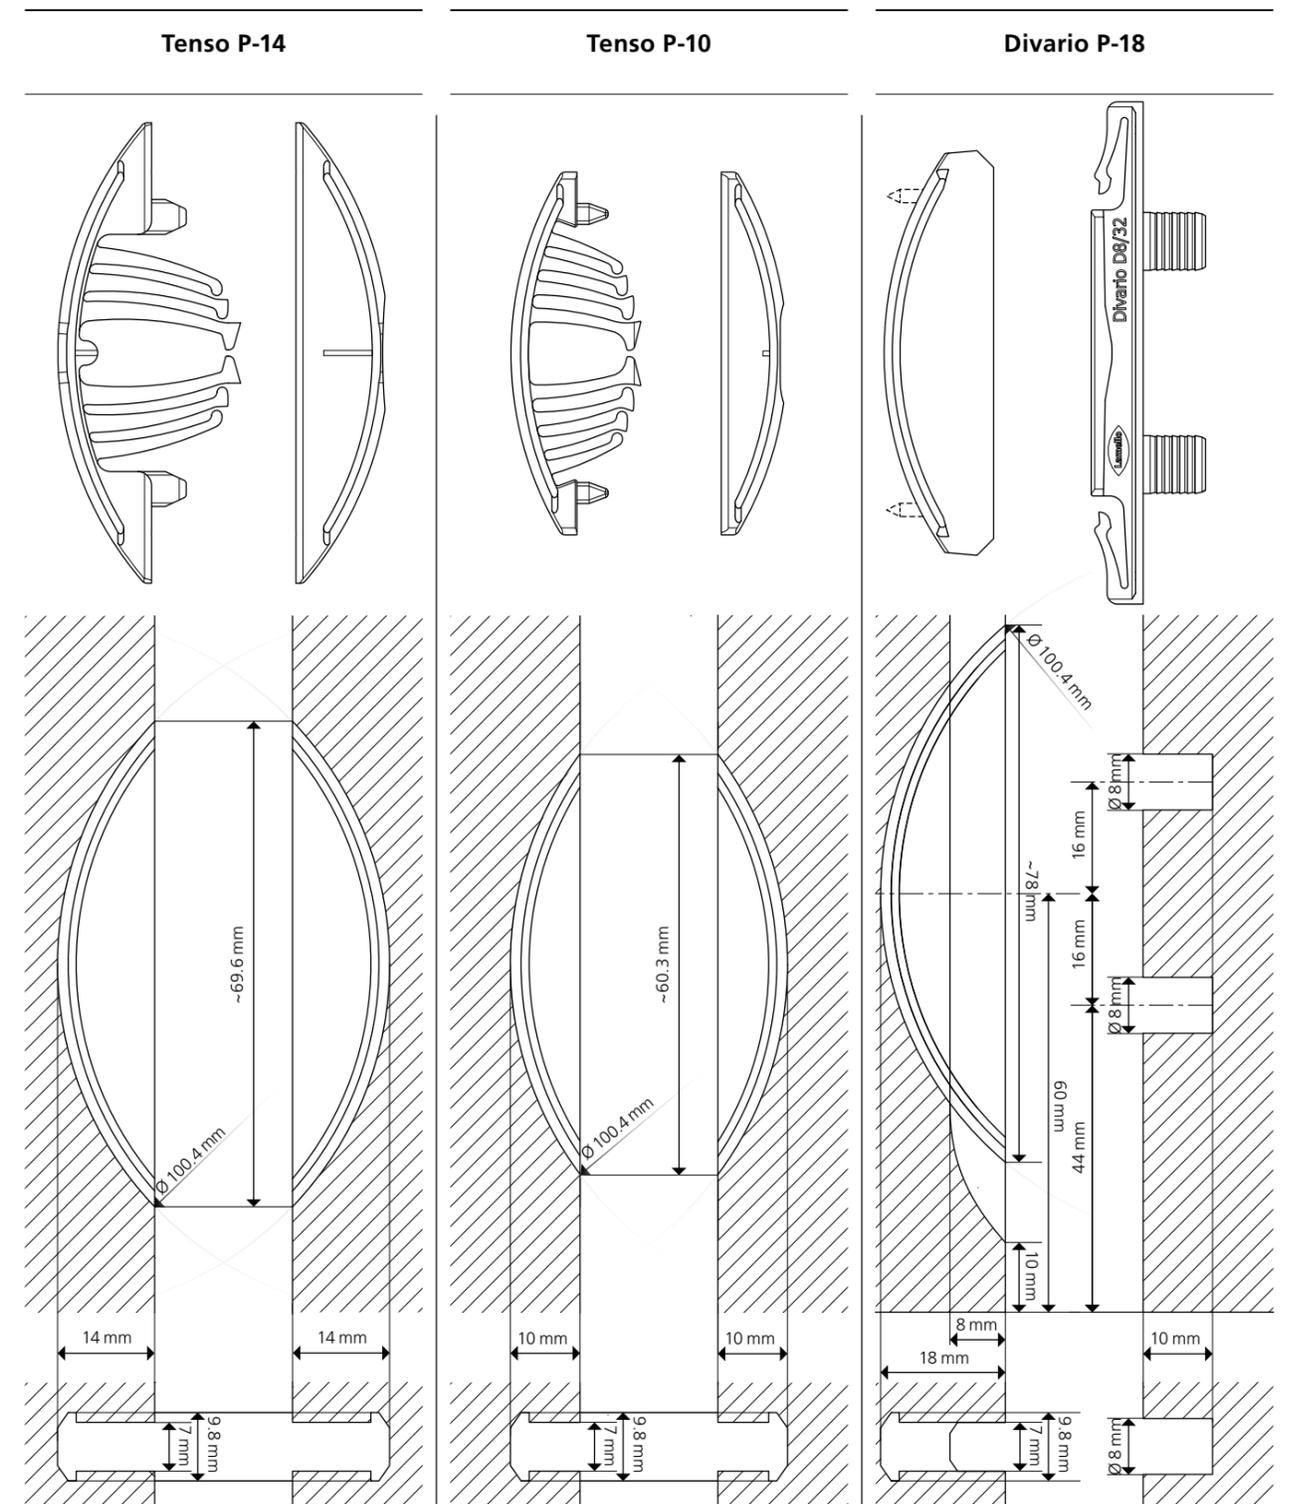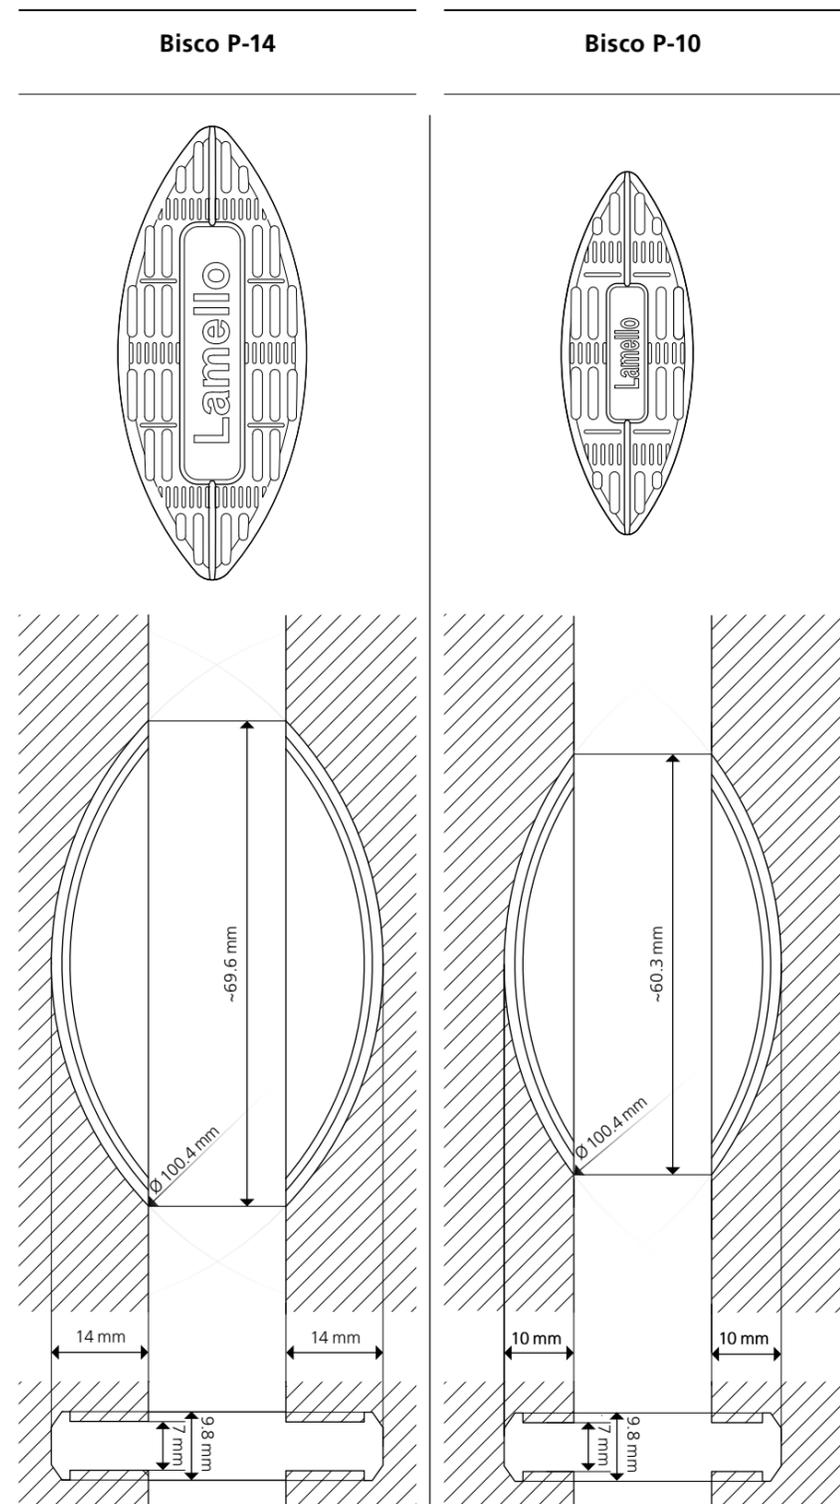

Tensile strength (N)

Depending on the adhesive

Depending on the adhesive

Load limits per connector (N)*

19 mm	
MDF	740 ¹
Particle board	590 ¹
Beech	1820 ¹


Tensile strength (N)

All materials	600 ¹
---------------	------------------

Technical information

Overview of connectors + grooves (scale 1:1)

LC P-16×11		LC P-16×17		LC P-16×22	
Tensile strength 90° (N)					
Surface layer / Interlayer	Up to	Surface layer / Interlayer	Up to	Surface layer / Interlayer	Up to
MDF / Corrugated wood fibre	680 ¹	MDF / Corrugated wood fibre	670 ¹	MDF / Corrugated wood fibre	1100 ¹
Particle board / Cardboard honeycomb	460 ¹	Particle board / Cardboard honeycomb	410 ¹	Particle board / Cardboard honeycomb	870 ¹

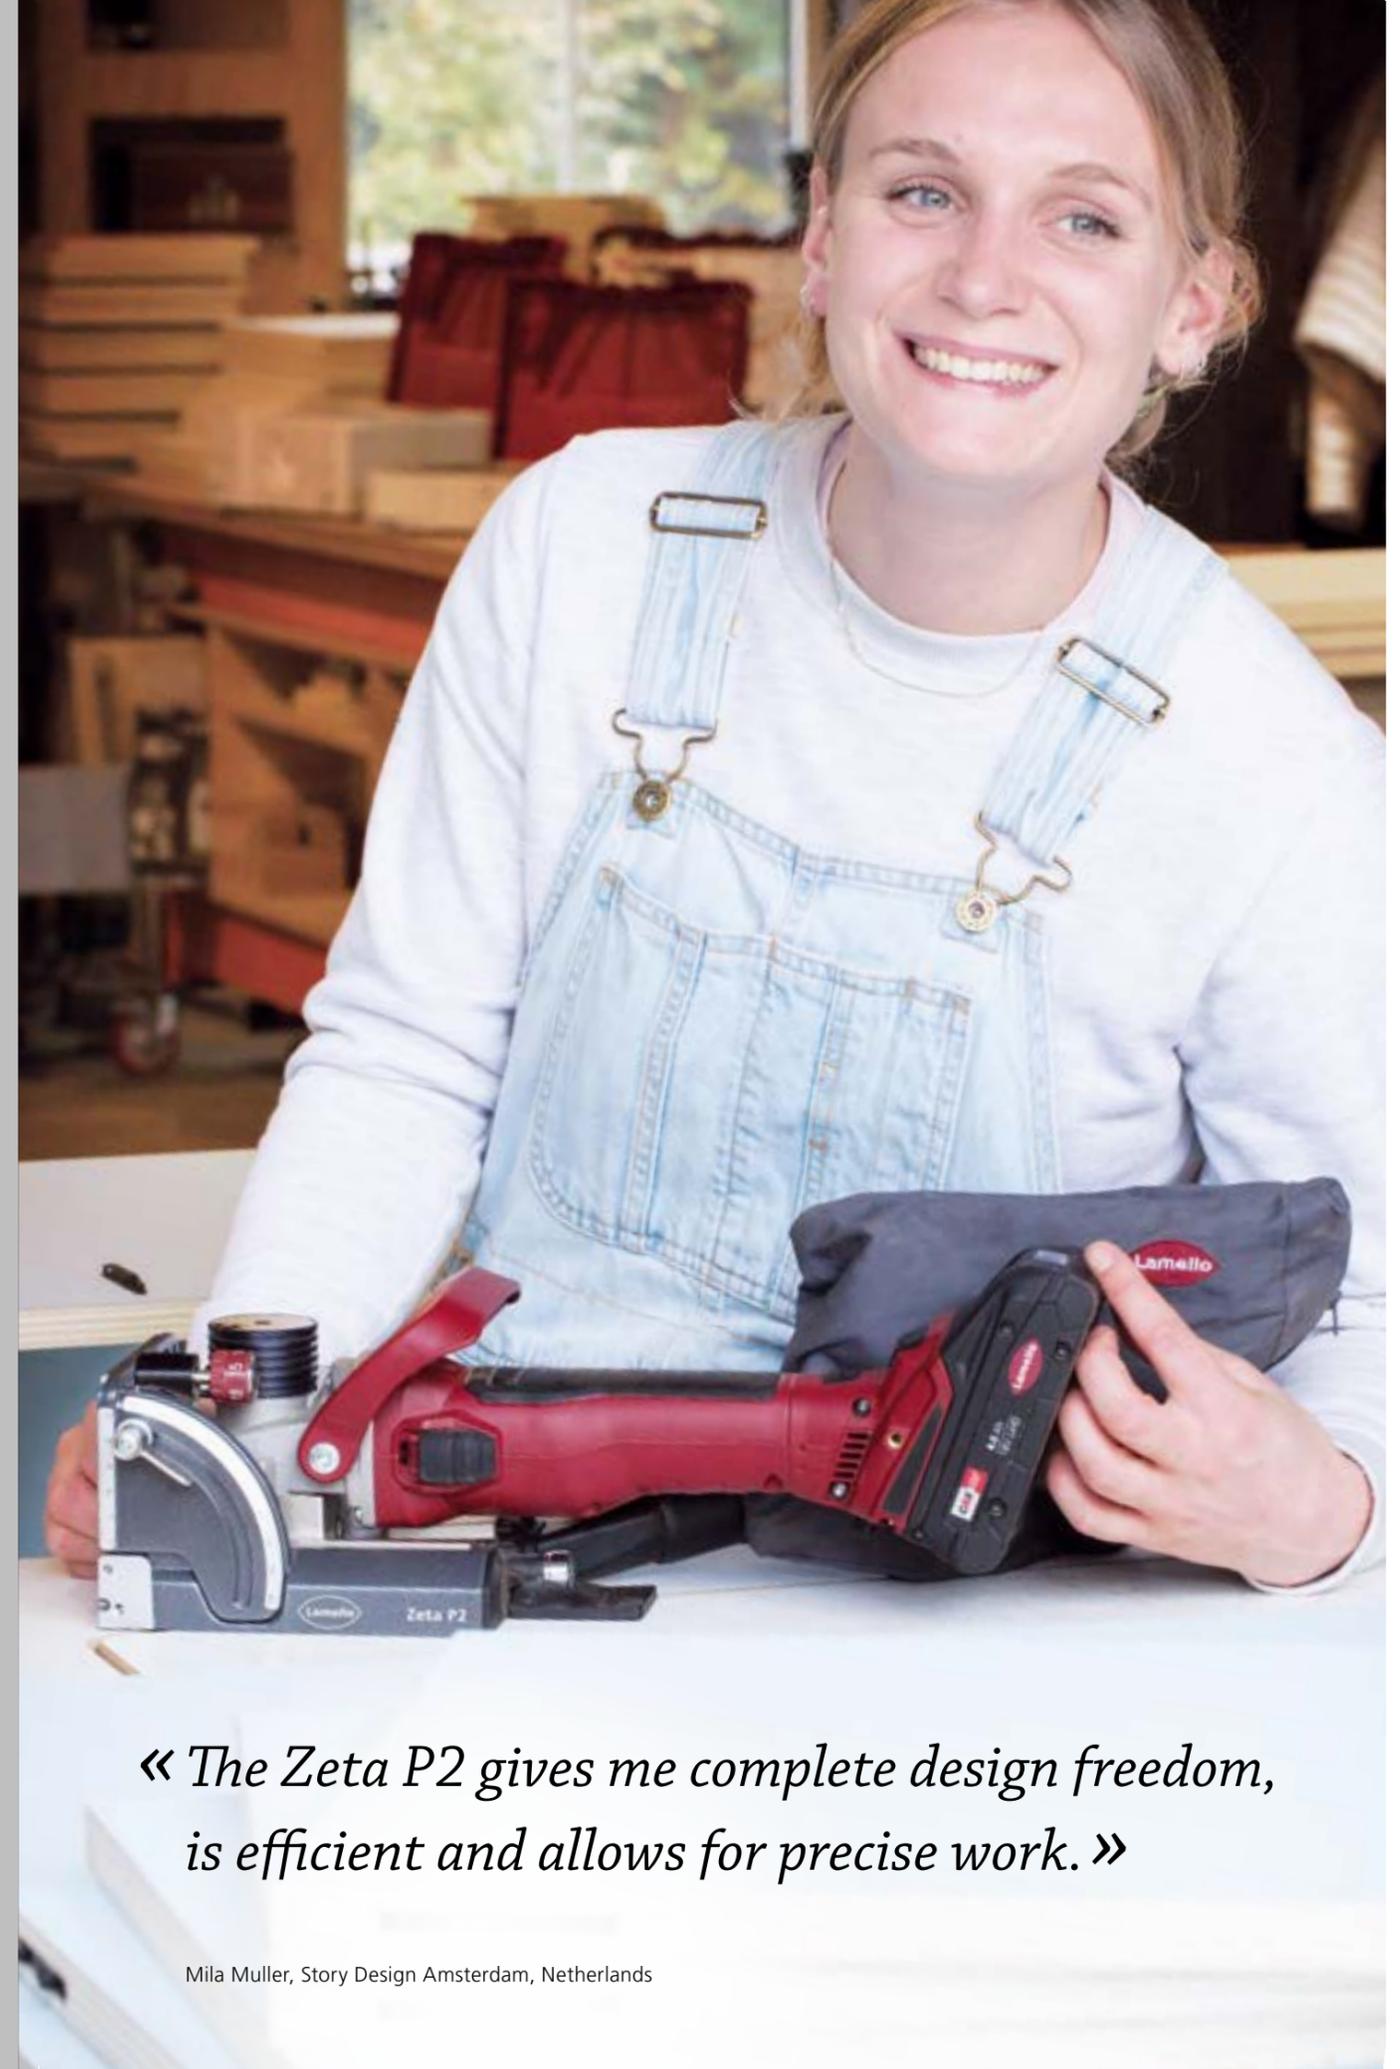

« The Zeta P2 gives me complete design freedom, is efficient and allows for precise work. »


Mila Muller, Story Design Amsterdam, Netherlands

Lamello System


The original for efficient, intuitive and precise joints




Features




Versatile use
One cutting principle for many different joining elements




Lateral tolerance
The generous sliding tolerance allows for perfect flush alignment of workpieces



Perfect fit
The precision of the joining elements and of the 4 mm groove lead to a perfect fit



Versatile
The minimal element depth allows for mitres of 22.5-180 degrees as well as surface and corner joints and divisions




Symmetrical
The identical groove in both workpieces leads to an increase in efficiency in production

Lamello System


Overview

Features	Connector	Machines	Sequence				
			1 Cut	2 Apply glue	3 Insert the connector	4 Clamp	
		Power tools	CNC machines				


Glueing

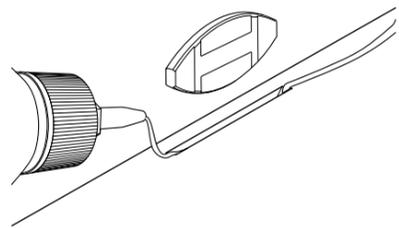


Original wood biscuit




C20




Detachable

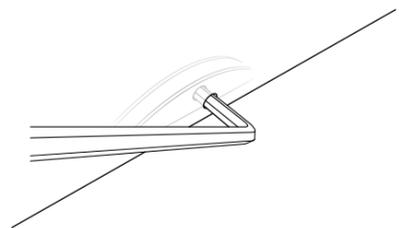


Clamex S-20



Clamex S-18





Inserted

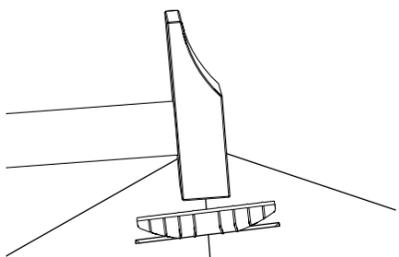


E20




K20

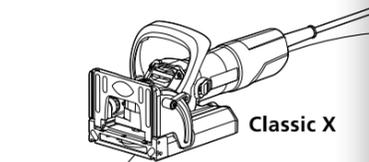


Classic X




Classic X cordless




Top 21




Zeta P2




Zeta P2 cordless










CNC processing centres with **consoles**



CNC processing centres with **nesting technology**



CNC processing centres **vertical**






*« Dividing large rear panels for transport
and reconnecting them on site?
Very easy with the Clamex S-20. »*

Simon Jeggli, Killer AG, Lupfig, Switzerland

Lamello System

Applications

Furniture manufacturing

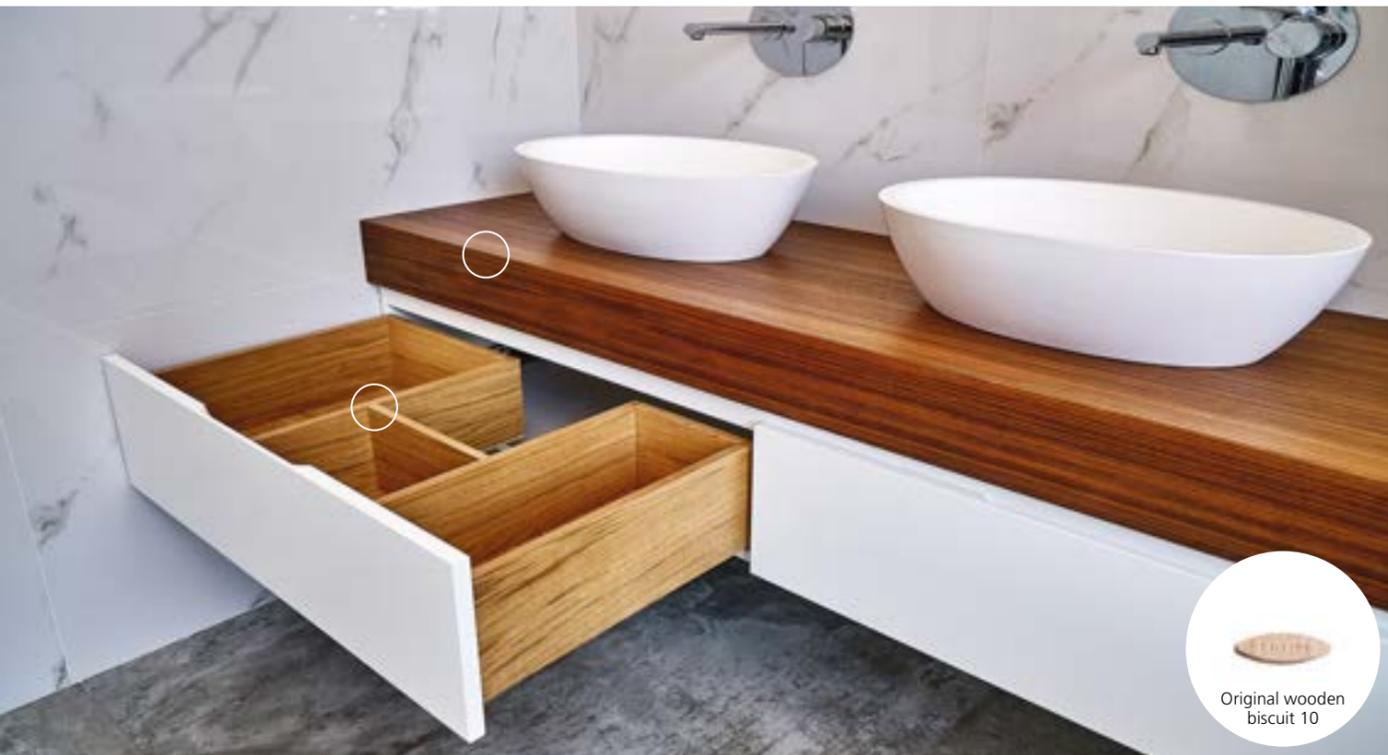


Interior fitting



Lamello System

Applications

Kitchen manufacturing

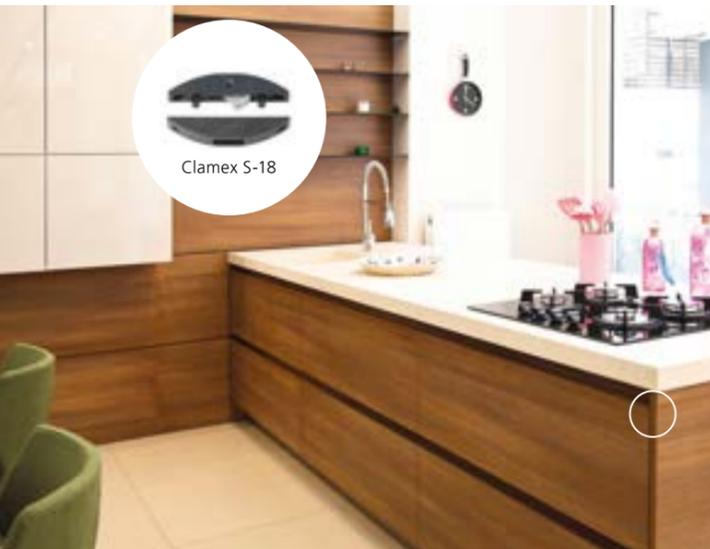

Commercial joinery




Shop fitting

Original wood biscuit

The original wood biscuit that always fits



Features

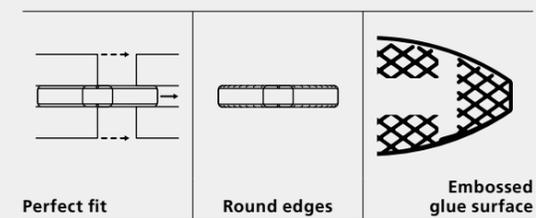

- Original wooden biscuit for joints in wood and panel materials
- Proven system for angle and miter joints from 22.5° to 180°
- Four sizes for a wide range of applications
- Optimized surface structure for perfect fitting accuracy and glue distribution
- Ideal for various applications in furniture construction and interior fittings


The original wood biscuit is the proven solution for wood joints and the original from the inventor of the system. The original wood biscuit guarantees quality with its dimensional accuracy, optimal glue distribution, dimensional stability as well as the sustainable cultivation of the beech wood. The perfect fit demonstrates its value from the very start, when the biscuits are easily inserted into the groove and remain in place even when the work piece is turned.

Articles


	Art. No.
Original wood biscuit 20, 1000 pieces	144020
	Art. No.
Original wood biscuit 10, 1000 pieces	144010
	Art. No.
Original wood biscuit 0, 1000 pieces	144000
	Art. No.
Original wood biscuit H9*, 1000 pieces	144009
Original wood biscuit assorted Kit contains: 250 x Original wood biscuit 0, 250 x Original wood biscuit 10, 500 x Original wood biscuit 20	144030

* Installation of wood biscuits with cutter Ø 100 x 4 x Ø 22 mm (standard cutter). Installation of H9 wood biscuits with cutter Ø 78 x 3 x Ø 22 mm (Art. No. 132009)

Matching accessories starting on PAGE 170








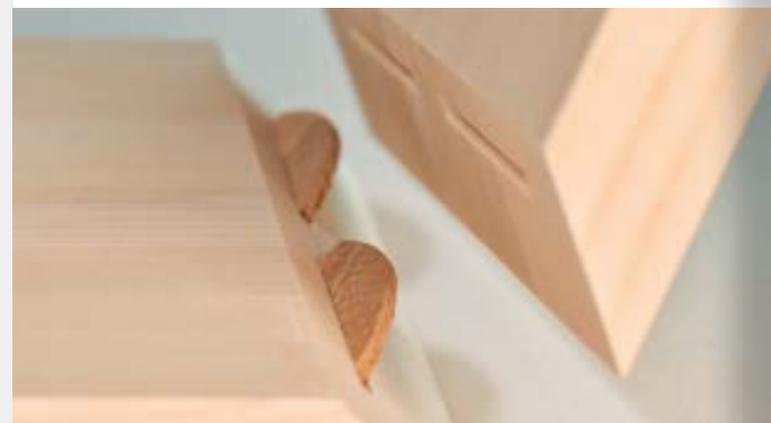


Installation

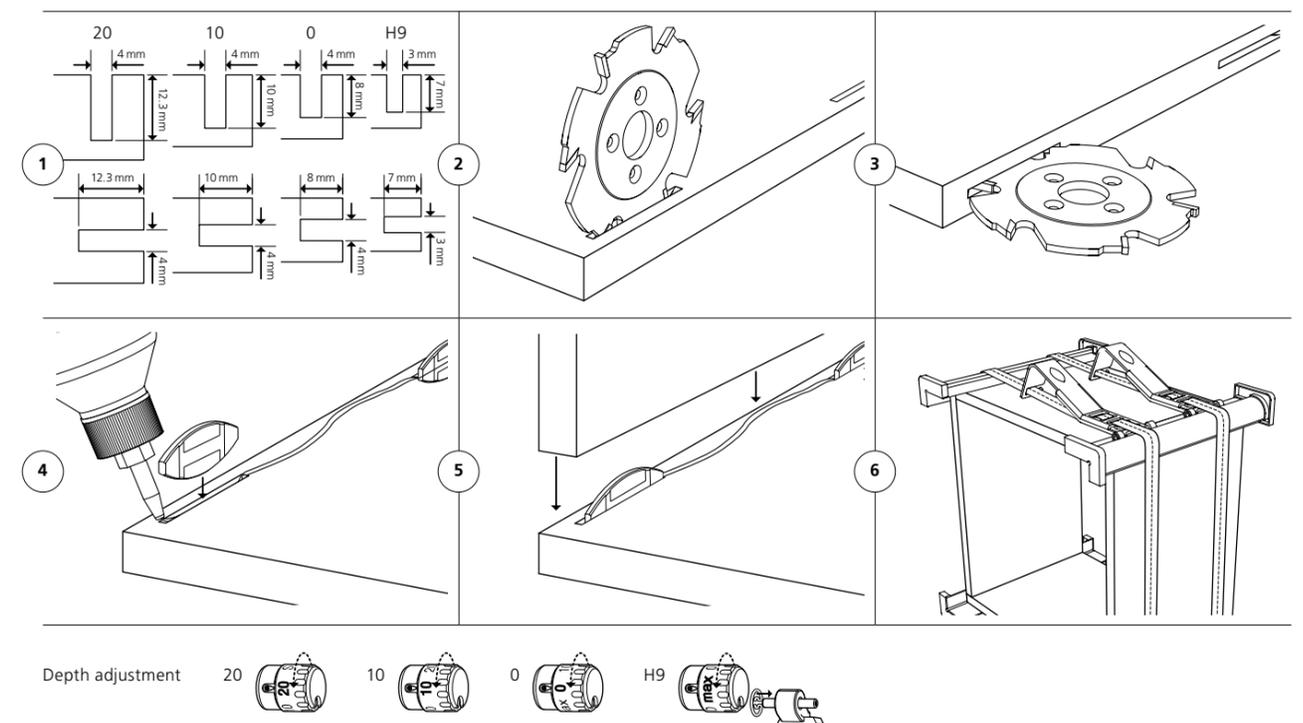

Technical data

Joining methods

20		
10		
0		
H9		


Size 20	56 x 23 x 4 mm
Size 10	53 x 19 x 4 mm
Size 0	47 x 15 x 4 mm
Cutter	Ø 100 x 4 x Ø 22 mm
Size H9	38 x 12 x 3 mm
Cutter	Ø 78 x 3 x Ø 22 mm
Material connector	Beech
Installation tolerance	Long. ± 1.0 mm/radial ± 1.0 mm
Clamping force (N)	Depending on the adhesive
Material range	Particle board, MDF, plywood, softwood, hardwood etc.

See PAGE 114–115 for technical specifications

E20

The self-clamping element

Features

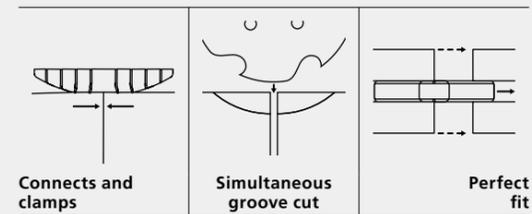


- Self-clamping element in size 20 for gluing
- Connects and tensions the joint when hammered into the 4 mm groove
- Two versions for surface or edge connections
- Efficient machining thanks to simultaneous cutting of both workpieces
- Ideal for picture frames, plinth extensions, connection solution on the construction site

E20 is a self-clamping element and can be used with any Lamello biscuit joiner. The E20 is driven into the 4 mm groove using a hammer. During insertion, the curved ridges on each side of the connector hold in the groove and clamp the workpieces together. E20 serves as a perfect gluing aid in the workshop or on site. E20-L is suitable for surface joints such as picture frames, plinth or panel extensions. E20-H is used in the edge and serves as a plinth connector.

Articles


	Art. No.
E20-H self-clamping element, 80 pieces	145021
E20-H self-clamping element, 400 pieces	145026
E20-H self-clamping element, 1200 pieces	145028
	
E20-L self-clamping element, 80 pieces	145022
E20-L self-clamping element, 400 pieces	145025
E20-L self-clamping element, 1200 pieces	145027
E20-L/E20-H self-clamping element assorted, 40/40 pieces	145020

Matching accessories starting on PAGE 170

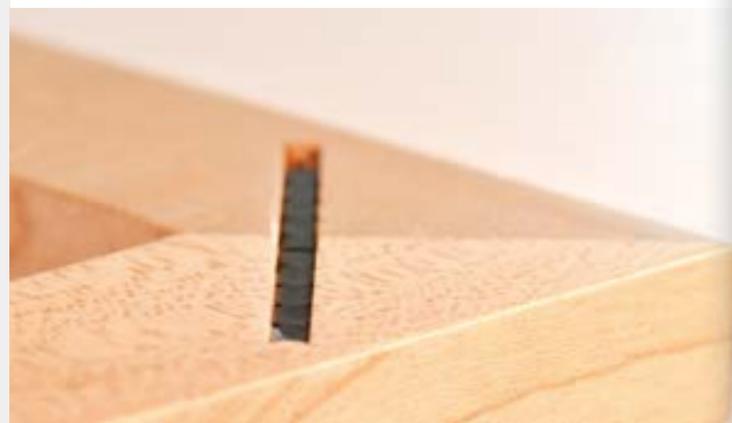


Installation

E20-H

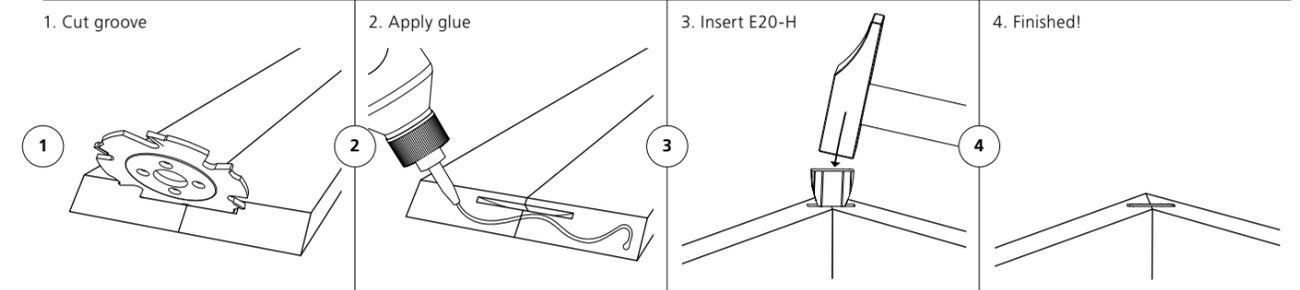

Depth adjustment E20-H 


E20-L

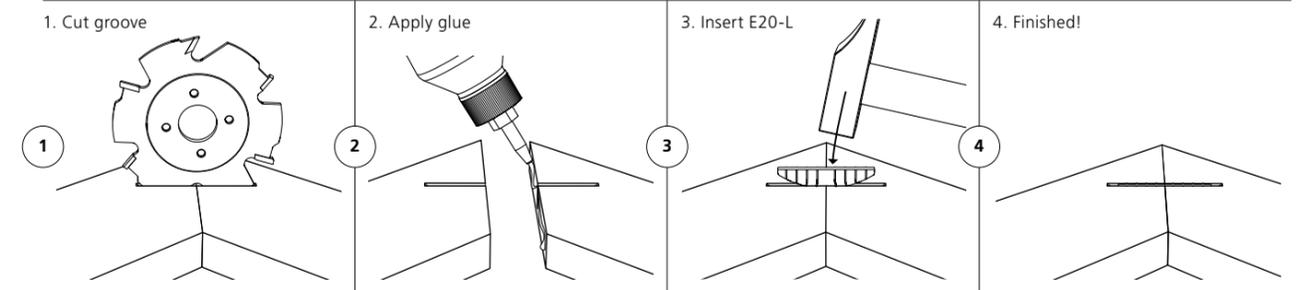

Depth adjustment E20-L 

Technical data

Joining methods

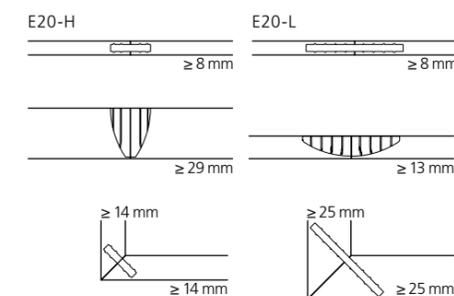

Size E20-H	23 × 28 × 4 mm
Size E20-L	56 × 11.5 × 4 mm
Cutter	Ø 100 × 4 × Ø 22 mm
Material connector	Fiberglass reinforced plastic
Clamping force (N)	Depending on the adhesive
Material range	Particle board, MDF, plywood, softwood, hardwood etc.


See PAGE 117 for technical specifications

Clamex S-20

Detachable furniture connector for the 4 mm groove



Features

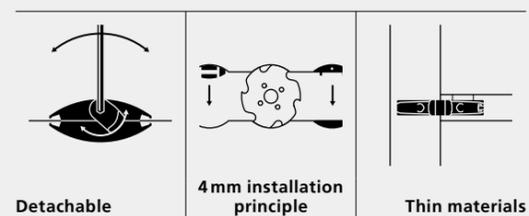

- Detachable furniture connector with 4 mm thickness, fastened with screws
- Size 20, ideal for thin materials, from 14 mm material thickness
- Aesthetic look with the barely visible 6 mm access hole
- All angle and miter joints from 22.5° to 180°
- Ideal for furniture with slopes, thin materials, kitchen worktops in HPL

Clamex S-20 is a detachable connector for the Lamello system for material thicknesses from 16 mm and is fastened in the groove with screws. The symmetric 4 mm grooves can be created with any biscuit joiner. Clamex S-20 is connected to the counterpart with a lever and has a lateral installation tolerance. It requires no adhesive, enables aesthetic connections at all angles and is ideal for fixed or detachable connections.


Articles

	Art. No.
Clamex S-20, 20 pairs, incl. screws	145243
Clamex S-20, 80 pairs, incl. screws	145244
Clamex S-20, 300 pairs	145245
Clamex S-20, 1000 pairs	145246
	
Clamex S-20 screw Ø 3 x 12 mm, 1500 pieces	125255


	
Clamex S-20 Starter set, in Systainer ³ M 137	145247
Scope of delivery: 145244 Clamex S-20, 80 pairs, incl. screws, 125253 Clamex S-20 drill jig incl. drill Ø 6 mm, 251993 Clamex P Installation tool	

Matching accessories starting on PAGE 170

Installation

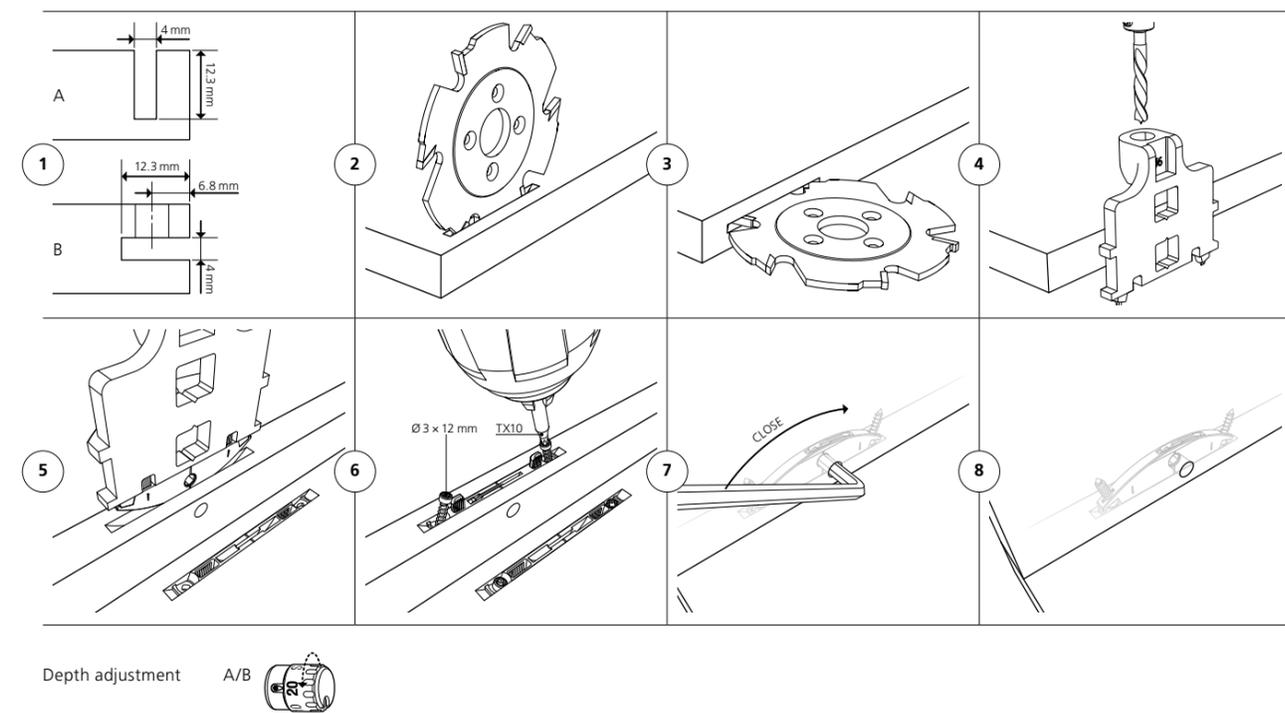

Technical data

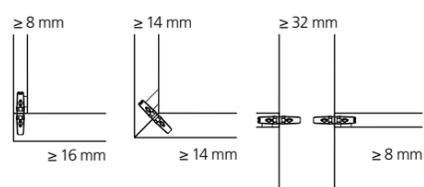Joining methods	Size	59 x 12 x 3.9 mm		
	Cutter	Ø 100 x 4 x 22 mm		
	Material connector	Fiberglass reinforced plastic		
	Material of lever	Zinc die cast		
	Screw	3 x 12 mm		
	Installation tolerance	Long. ± 1 mm/radial ± 0 mm		
	Clamping force (N) Up to	MDF 680 ¹	Particle board 490 ¹	Beech 620 ¹
	Material range	Particle board, MDF, plywood, hardwood, HPL etc.		


See PAGE 116 for technical specifications | ¹ See technical notes on page PAGE 185

Clamex S-18

Detachable, flexible and simple.
Installation in an 8 mm groove
with screws



Features

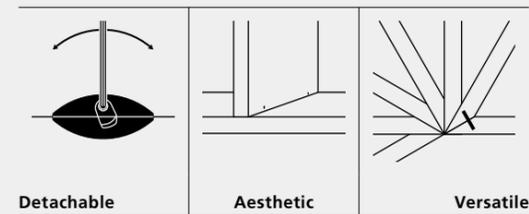

- Detachable furniture connector with 8 mm thickness, fastened with screws
- Aesthetic look with the barely visible 6 mm access hole
- All angle and miter joints from 22.5° to 180°
- High clamping force for perfectly closed joints
- Ideal for open shelves, cupboards or wardrobes under sloping roofs

Clamex S-18 is a detachable connector. It is inserted into an 8 mm wide groove* and held in place with screws. Through the minimalist 6 mm access hole, Clamex S-18 is firmly connected and disconnected using a lever. Clamex S-18 can be used with any Lamello biscuit joiner, allows aesthetic joints at all angles and is ideal for permanently joined or detachable mitres. Clamex S-18 is used in mitre joints from 19 mm material thickness and in butt joints from 15 mm.

Articles




	Art. No.
Clamex S-18, 18 pairs, incl. marking jig and screws	145231
Clamex S-18, 80 pairs, incl. marking jig	145236
Clamex S-18, 300 pairs, incl. marking jig	145241
Clamex S-18, 1000 pairs, incl. marking jig	145251

* Double cut with 4 mm cutter and spacer
Single cut with 8 mm cutter Art. No. 132108

Matching accessories starting on PAGE 170




Installation

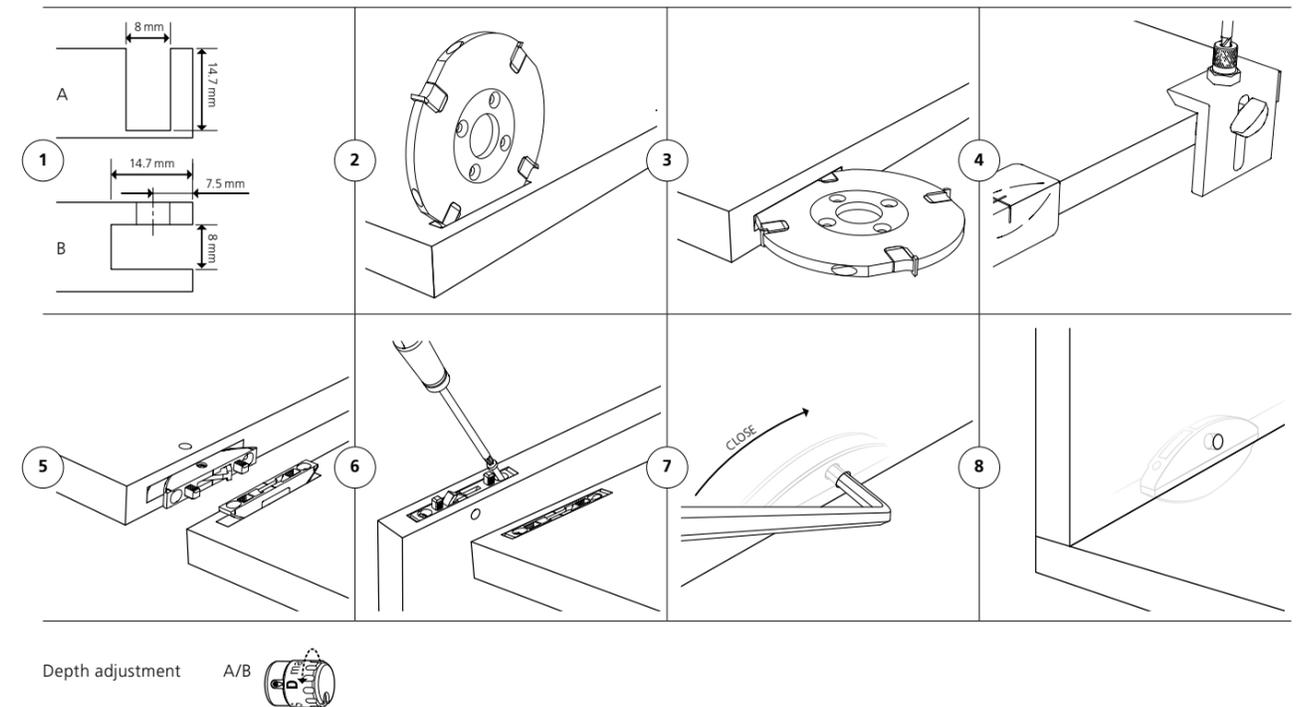

Depth adjustment A/B

Technical data

Joining methods

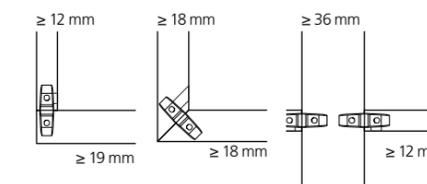

Size	66 × 29 × 8 mm		
Cutter	Ø 100 × 8 × Ø 22 mm		
Material connector	Fiberglass reinforced plastic		
Material of lever	Zinc die cast		
Screw	3 × 16 mm		
Installation tolerance	Long. ± 1.0 mm		
Clamping force (N) Up to	MDF 790 ¹	Particle board 550 ¹	Beech 1420 ¹
Material range	Particle board, MDF, plywood, softwood, hardwood etc.		

See **PAGE 116** for technical specifications | ¹ See technical notes on page **PAGE 185**

K20

The clamping element, which holds the workpiece in position



Features



- Clamping element in size 20 for gluing
- Lateral barbed ribs hold components in position
- Application in combination with wooden biscuits for high joint strength
- All angle and miter joints from 22.5° to 180°
- Ideal for fillers or covers

K20 is a clamping element and can be used with any Lamello biscuit joiner. K20 has barbed ridges on each side of the connector which anchor themselves into the 4 mm groove. The clamping biscuit is ideal for difficult to clamp workpieces such as fillers or covers and is able to hold workpieces in the correct position until the adhesive is dry. The combination with the original wood biscuits size 20 results in a joint with high strength.

Articles




	Art. No.
K20 clamping element, 80 pieces	145001
K20 clamping element, 250 pieces	145000
K20 clamping element, 2500 pieces	1450001

Matching accessories starting on PAGE 170




Installation

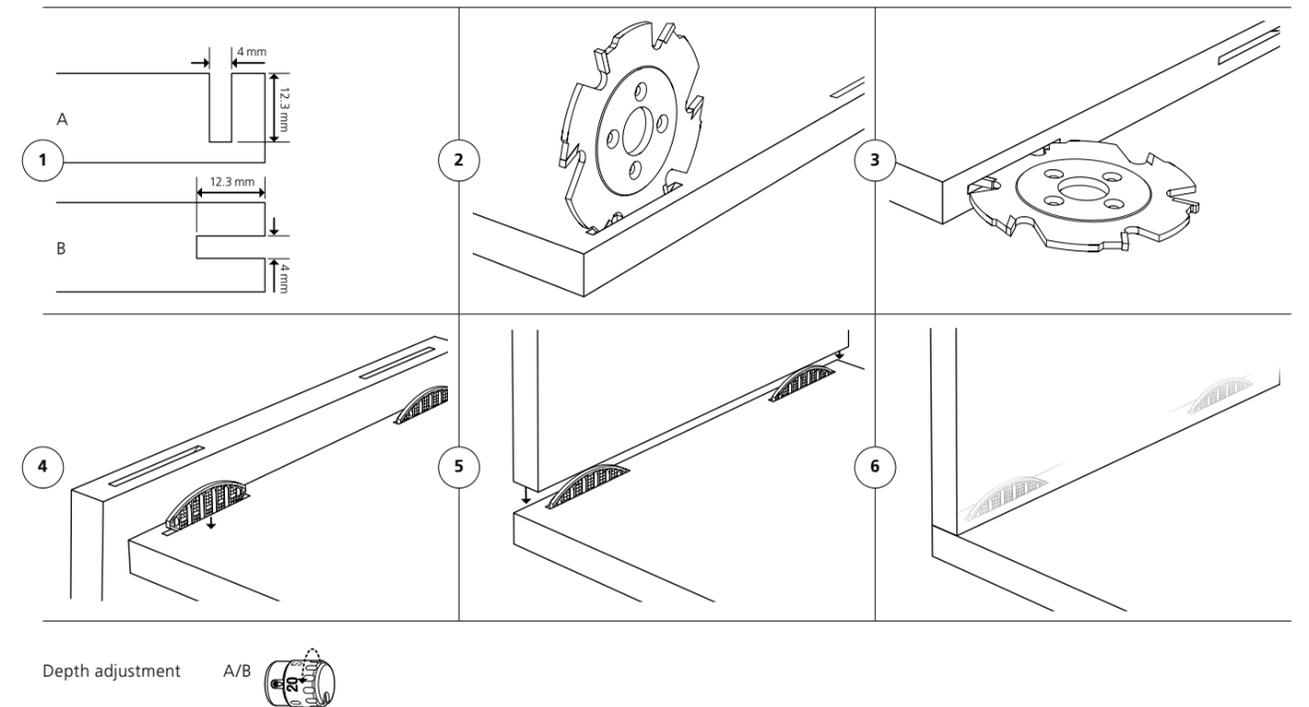

Technical data

Joining methods

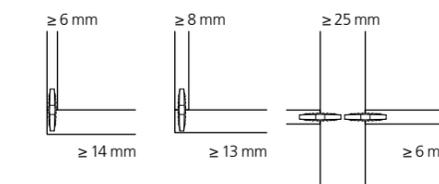

Size	60 × 24 × 4.5 mm
Cutter	Ø 100 × 4 × Ø 22 mm
Material connector	Plastic
Installation tolerance	Long. ± 1.0 mm/radial ± 1.0 mm
Clamping force (N)	Depending on the adhesive
Material range	Particle board, MDF, plywood, softwood, hardwood etc.


See PAGE 117 for technical specifications

C20/C10

The transparent element



Features

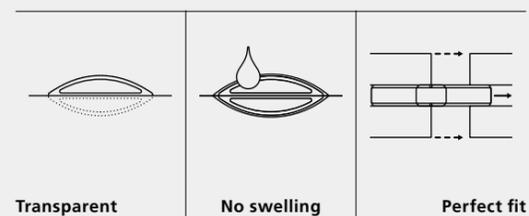

- Transparent plastic biscuit for solid surface materials
- No show-through of the connector in thin, white solid surface materials
- No swelling in contact with moisture
- All angle and miter joints from 22.5° to 180°
- Ideal for store counters, kitchen tops and for wet or outdoor areas

C10 and C20 plastic biscuits are the proven joining solution for mineral composite materials such as Corian, Varicor. The white transparent plastic ensures that the connectors do not show through thin materials. The specific adhesive for composites can be used for the joints as well as for the biscuits. Since the C10 and C20 do not swell, these biscuits are also suitable for outdoor or wet areas. The sizes 10/20 match the sizes of the original wood biscuit.


Articles

	Art. No.
C20 transparent element, 250 pieces	145010
C20 transparent element, 2500 pieces	145010I
	Art. No.
C10 transparent element, 300 pieces	145012



Matching accessories starting on PAGE 170



Installation

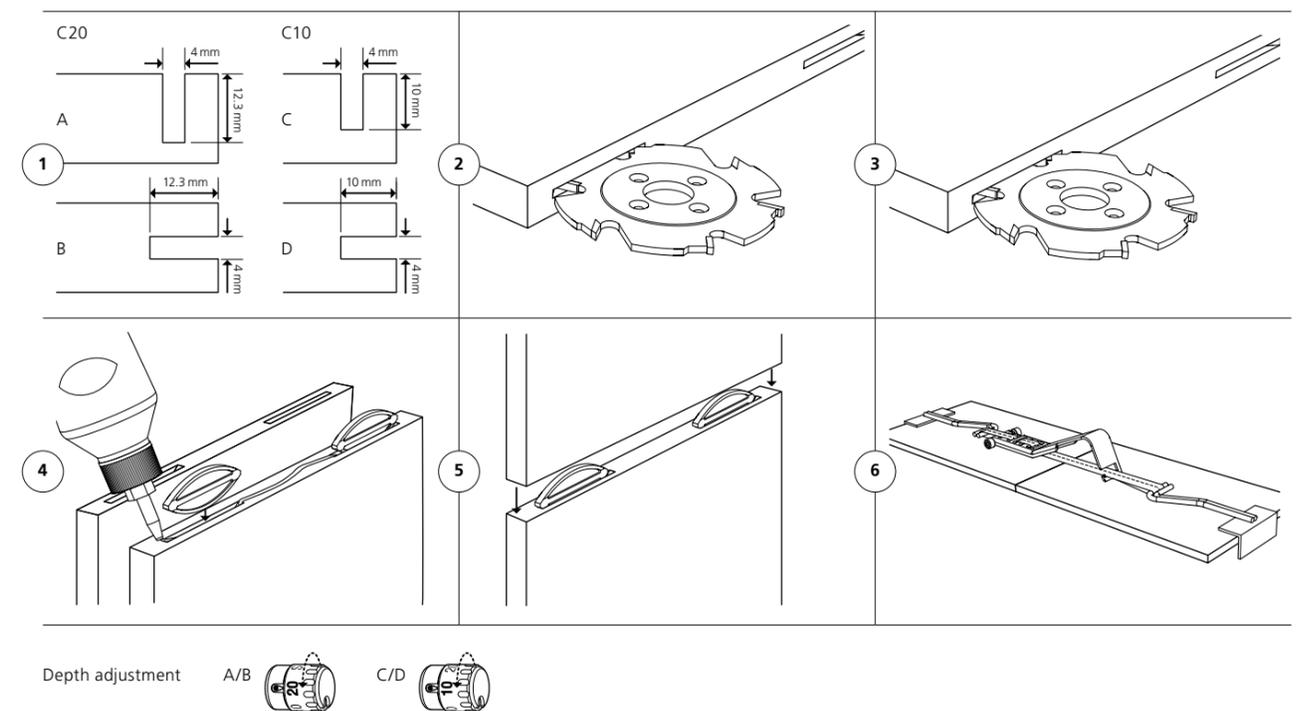

Technical data

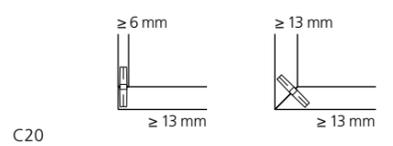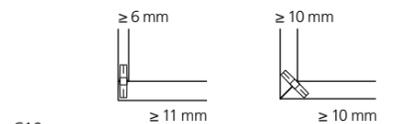Joining methods	Size C20	61 × 23 × 4 mm
	Size C10	53 × 19 × 4 mm
	Cutter	Ø 100 × 4 × Ø 22 mm
	Material connector	Plastic
	Installation tolerance	Long. ± 1.0 mm/radial ± 1.0 mm
	Clamping force (N)	Depending on the adhesive
	Material range	Mineral material panels (e.g. Corian)


See PAGE 115 for technical specifications

Minicol

The all purpose glue applicator




Features

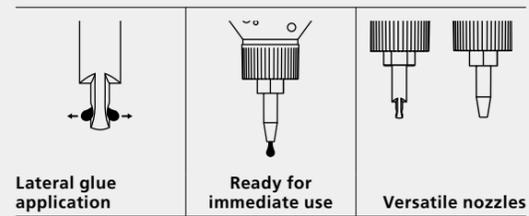

- Practical glue bottle for applying white glue (PVAC)
- Downward-facing bearing for immediate use
- Lamella nozzle with lateral glue outlet for better distribution
- Pointed nozzle for universal use
- For gluing wooden joints with wooden biscuits

Minicol is a universal glue applicator and the ideal solution for applying glue in 4 mm grooves. Unlike with a glue bottle, the glue exits the nozzle on the sides. Therefore glue is applied to the groove sides instead of the groove bottom, resulting in better distribution and a more stable joint. As the glue applicators are positioned with the nozzles facing downwards in the wooden base, the glue leaves the nozzle immediately and drying out is prevented. In addition to the plastic nozzle, a metal nozzle for biscuit grooves and a pointed nozzle are also available.

Articles

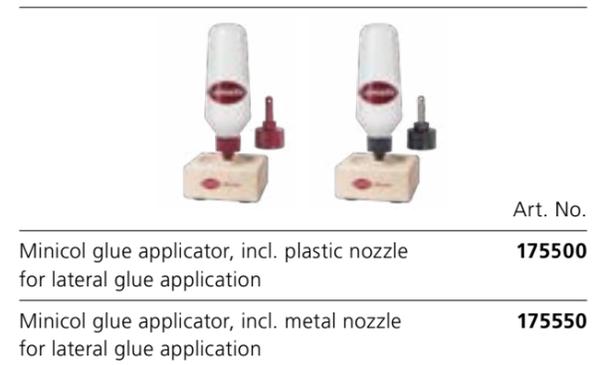

	Art. No.
Minicol glue applicator, incl. plastic nozzle for lateral glue application	175500
Minicol glue applicator, incl. metal nozzle for lateral glue application	175550




Minicol pointed nozzle **335522**



Minicol metal nozzle, for lateral glue application, 4 mm biscuit groove	285512
Minicol metal nozzle H9, for lateral glue application, groove width 3 mm	285509
Minicol plastic nozzle, for lateral glue application, 4 mm biscuit groove	335511

Function

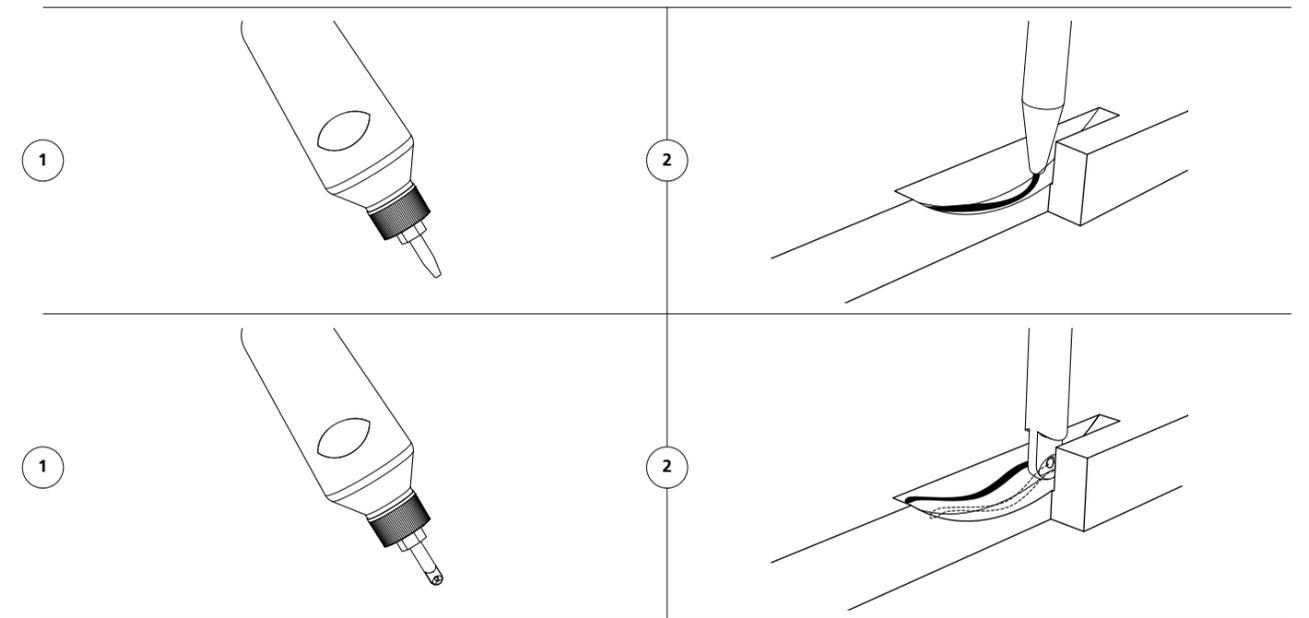

Technical data

Dimension	100 × 100 × 230 mm	
Volume	300 ml	
Material	Base	Maple
	Bottle	Plastic
	Nozzle	Metal/Plastic




« Lamello's wooden biscuits stand for precision, sustainability and a connection that lasts. »

Reinhard Moser, Owner, Moser Holzindustrie, Austria

Classic X cordless

The original biscuit joiner – precise and cordless

Features

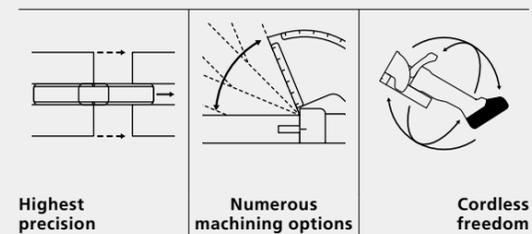

- Cordless biscuit joiner to produce the 4 mm groove for the Lamello system
- Maximum freedom of movement in the workshop or on the construction site
- Maximum precision for high-quality timber joints
- Multifunctional stop square and swivel stop with fixed pivot point
- Optimum user-friendliness for precise connections

Classic X cordless is the original biscuit joiner without cable to create the 4 mm groove. It is fast, mobile and versatile in use and forms the basis for the wide range of fixed, self-clamping and detachable connectors. Precision in every component leads to perfect accuracy of the workpieces and saves time. The multifunctional stop square enables perfect mitre joints to be made by applying the machine on the exterior surface and stabilises it in vertical position.

Articles



CAS

Art. No.

Classic X cordless biscuit joiner, Set, in systainer, incl. batteries, charger type C Euro **101701DES**

Classic X cordless biscuit joiner, in systainer, without batteries without charger **101700DES**

Classic X cordless biscuit joiner, in carton, without batteries without charger **101700DEK**

Classic X cordless biscuit joiner, Set, in systainer, incl. batteries, charger plug type G **101701GBS**

Classic X cordless biscuit joiner, in systainer, without batteries without charger **101700GBS**

Classic X cordless biscuit joiner, in carton, without batteries without charger **101700GBK**

Kit contains: Classic X cordless biscuit joiner, 2 x Battery pack 18V, LiHD 4.0 Ah*, Battery charger ASC 55*, suction stub 36 mm, stop square, spacer 4 mm, dust bag, tool set

* Only included in Art. No. 101701DES/101701GBS


For other plug versions please contact your local Lamello specialist




Matching accessories starting on PAGE 170

Function


90° corner and dividing panel connection

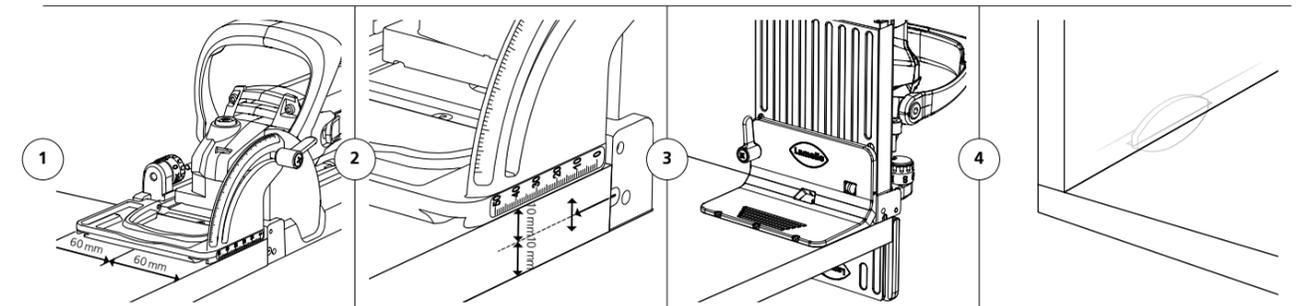

Miter connection 45° – 180° (struck from the outside)

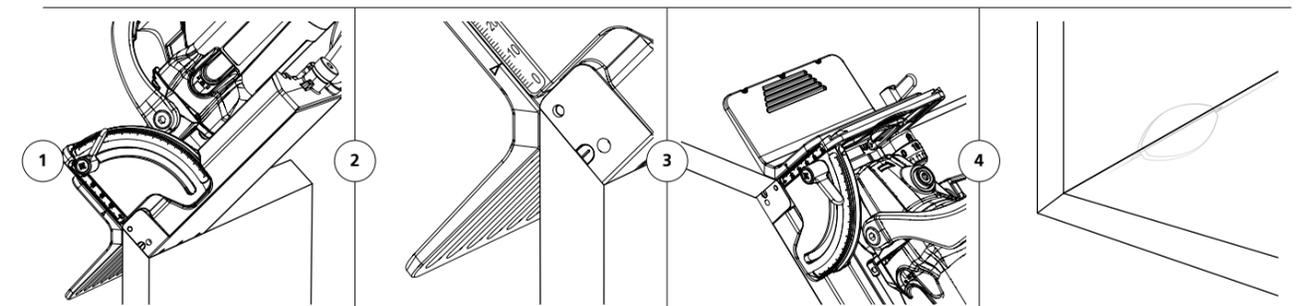

Obtuse miter connection 22.5° – 120°

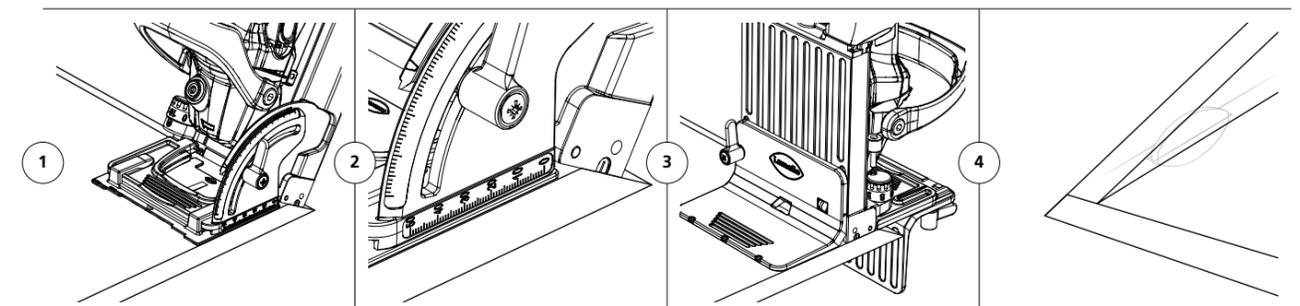

Technical data

Battery voltage	18 V	Groove width	4 mm
Speed	6 000 min ⁻¹	Groove depth max.	20 mm
Cutter	Ø 100 x 4 x 22 mm	Weight	3.1 kg incl. battery


More information regarding the battery system on PAGES 60–63

Classic X

The original biscuit joiner for every workshop



Features

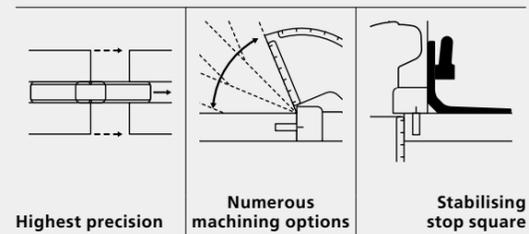

- Biscuit joiner to produce the 4 mm groove for the Lamello system
- Maximum precision for high-quality timber joints
- Multifunctional stop square and swivel stop with fixed pivot point
- Optimum user-friendliness for precise connections
- Attachment plate for individual adjustment of the groove position

Classic X is the original biscuit joiner from the inventor of the Lamello System for cutting the 4 mm groove. The proven and well-designed Classic X is fast and versatile in its use and the basis for the wide range of connectors with fixed, self-clamping and detachable solutions. Precision in every component leads to perfect accuracy of the workpieces and saves time. The multifunctional stop square allows perfect mitres by applying on the exterior surface and stabilises the machine in vertical position.

Articles



	Art. No.
Classic X biscuit joiner, plug type F Schuko, in Systainer ³ M	101602DES
Classic X biscuit joiner, plug type F Schuko, in carton	101602DEK
Classic X biscuit joiner, plug type G, in Systainer ³ M	101602GBS
Classic X biscuit joiner, plug type G, in carton	101602GBK
Kit contains: Classic X biscuit joiner, plug type C Euro, suction stub 36 mm, stop square, spacer 4 mm, set of tools	
<i>For other plug versions please contact your local Lamello specialist</i>	




Matching accessories starting on PAGE 170




Function


90° corner and dividing panel connection

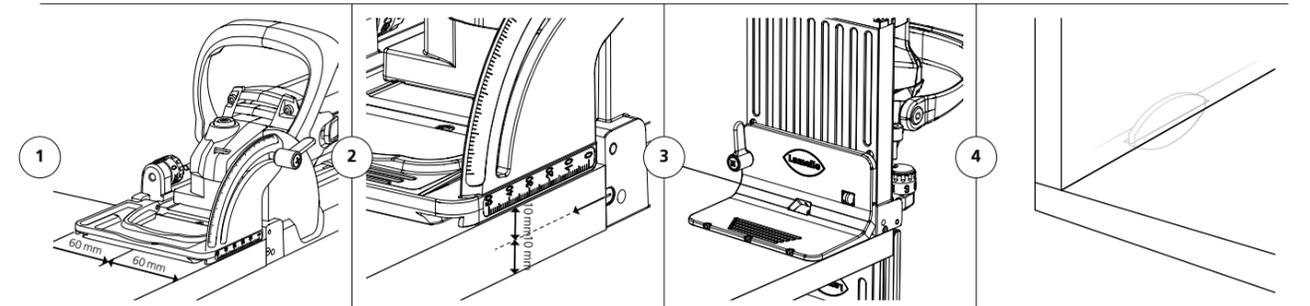

Miter connection 45° – 180° (struck from the outside)

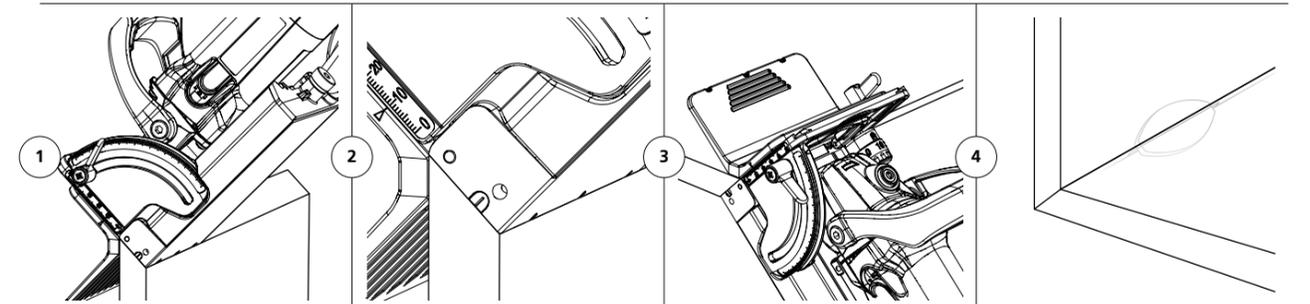

Obtuse miter connection 22.5° – 120°

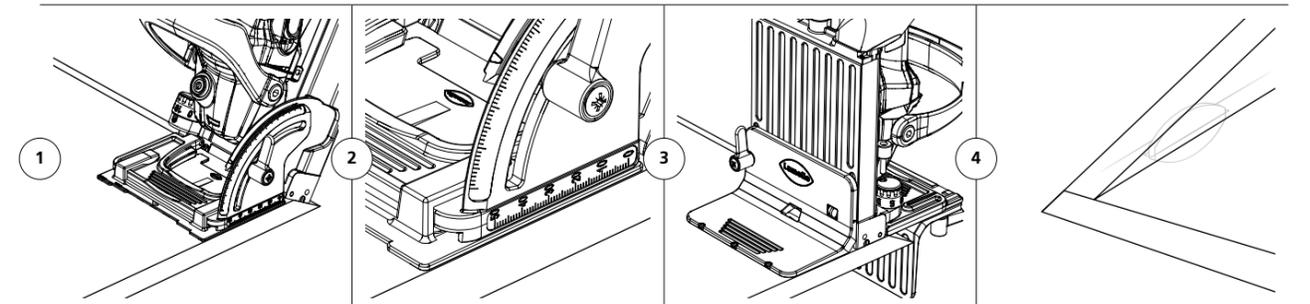

Technical data


Power/Voltage	850 W/230 V or 120 V	Teeth	Z6 (3+3) with reversing teeth
Speed	10 000 min ⁻¹	Cutting depth max	20 mm
Cutter	Ø 100 × 4 × Ø 22 mm	Weight	2.9 kg

Top 21

The original biscuit joiner with height adjustable blade from the inventor



Features

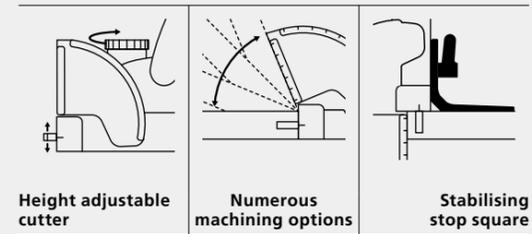

- Biscuit joiner with height adjustment for producing of the 4 mm groove
- Maximum precision for high-quality timber joints
- Multifunctional stop square and swivel stop with fixed pivot point
- Optimum user-friendliness for precise connections
- Positioning of the groove in the centre of the workpiece, connections with protruding edge

Top 21 is the biscuit joiner from the inventor of the Lamello System and includes a height adjustable blade for cutting the 4 mm groove. The unique height adjustment of the cutter in steps from 0.1 mm to max. 4 mm allows positioning the groove in the middle of the material thickness. Precision in every component leads to perfect accuracy of the workpieces and saves time. The multifunctional stop square allows perfect mitres by applying on the exterior surface and stabilises the machine in vertical position.

Articles



Art. No.

Top 21 biscuit joiner, plug type F Schuko, in Systainer³ M **101501DES**

Top 21 biscuit joiner, plug type G, in Systainer³ M **101501GBS**

Top 21 biscuit joiner, plug type F Schuko, in Systainer³ M with WS-cutter **101501DESW**

Kit contains: Top 21 biscuit joiner, plug type F Schuko, suction stub 36 mm, carbide reversing blade cutter, spacer 4 mm, set of tools, stop square, dust bag

For other plug versions please contact your local Lamello specialist




Matching accessories starting on PAGE 170




Function


90° corner and dividing panel connection

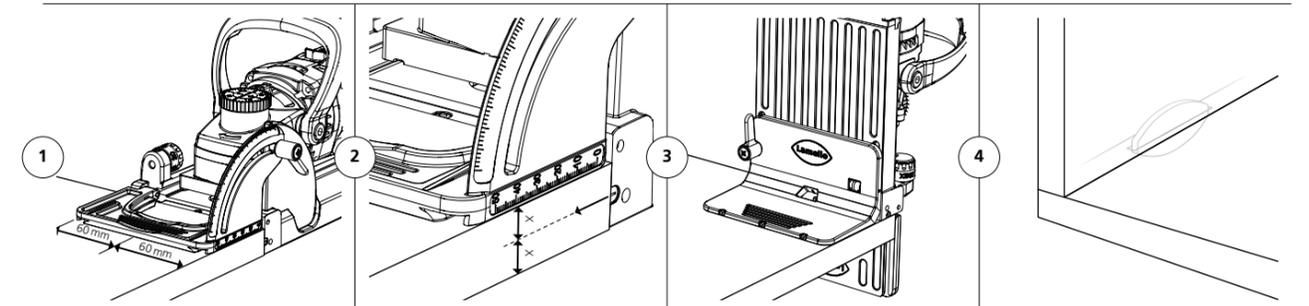

Miter connection 45° - 180° (struck from the outside)

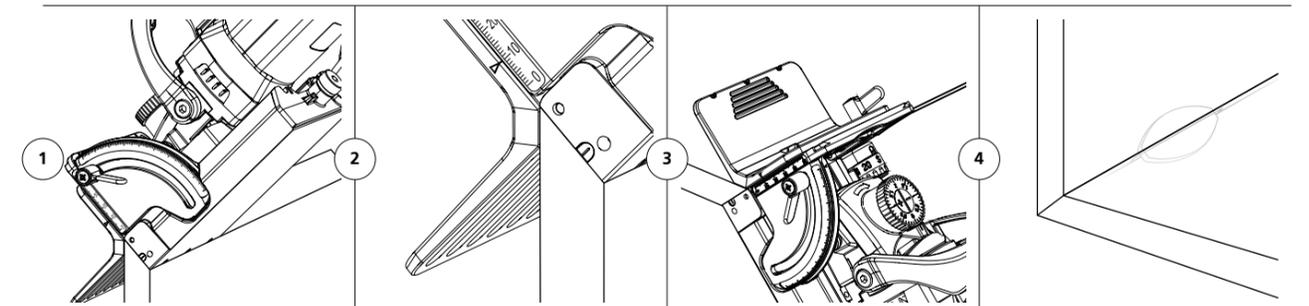

Height-adjustable cutter

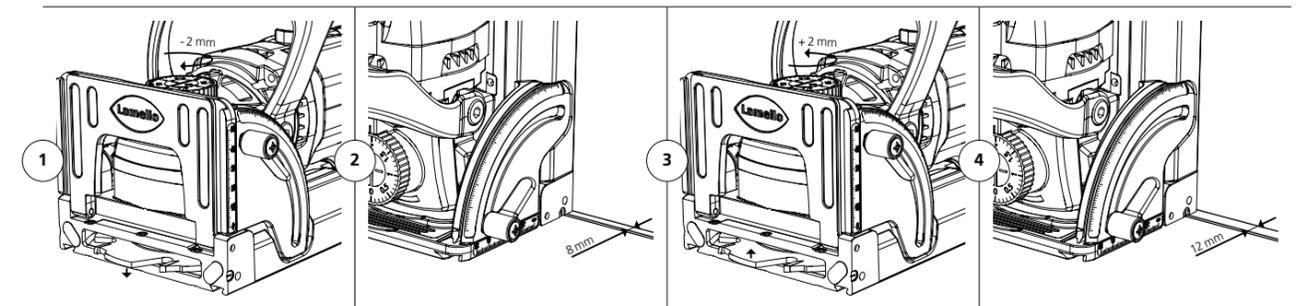

Technical data

Power/Voltage	1 050 W/230 V 800 W/120 V	Teeth	Z2 + V4 with scoring teeth
Speed	9 000 min ⁻¹	Cutting depth max	20 mm
Cutter	Ø 100 x 4 x Ø 22 mm	Weight	3.5 kg

Original Lamello biscuit joiners

These properties make the difference

Features

Multifunctional stop square included in the kit

Both sides flush surfaces

The baseplate, swivelling front and stop square are flush on both sides of the machine for efficient positioning of the biscuit joiner on the work piece's outer edge



Vertical stability by attaching to the baseplate to increase the surface



Perfect precision of mitres by applying on the outer surface for 22.5 and 45° angles





Variable positioning of the groove from the application surface 0–50 mm

Swivelling front with fixed rotational point

Exactly the same referencing distances from either the swivelling front or the base plate = 8 mm

Allows alternating the application surface from the swivelling front **1.** to the baseplate **2.** Especially important when cutting thin dividing panel connections

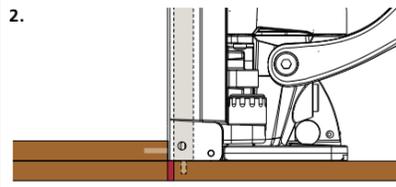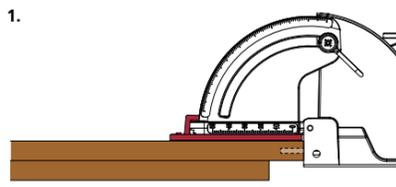

- **Safe process** guarantees always precise, parallel grooves
- **No inaccuracies or source of mistakes** because the height cannot be adjusted

Application with the swivelling front
With the 4 mm spacer for 12 mm dividing panel (groove in the centre)

Application with the baseplate
The dividing panel (moved by 4 mm) serves as application surface

High-precision machined application surfaces



– **CNC machined high-precision application surfaces** for exact application on the workpiece



– **Long-life precision guide** provides exact, parallel grooves for perfect fit of the workpieces

Versatile use

With various connecting elements

Join workpieces at different angles and in different joining methods with the Classic X and Top 21. Suitable for individual pieces of furniture as well as prototypes and line production.

With 4 mm Lamello System groove cutter




With 8 mm Lamello System groove cutter



With 3 mm Lamello System groove cutter



Lamello depth adjustment system

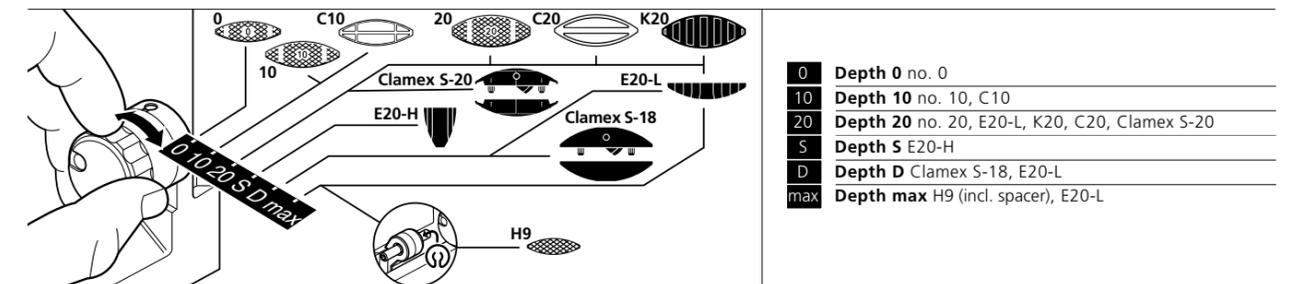

Technical information



Overview of connectors + grooves (scale 1:1)

Original wood biscuit 20	Original wood biscuit 10	Original wood biscuit 0
<p>Tensile strength (N) Depending on the adhesive</p>	<p>Depending on the adhesive</p>	<p>Depending on the adhesive</p>

Original wood biscuit H9	C20	C10
<p>Tensile strength (N) Depending on the adhesive</p>	<p>Tensile strength (N) Depending on the adhesive</p>	<p>Depending on the adhesive</p>

Technical information

Overview of connectors + grooves (scale 1:1)

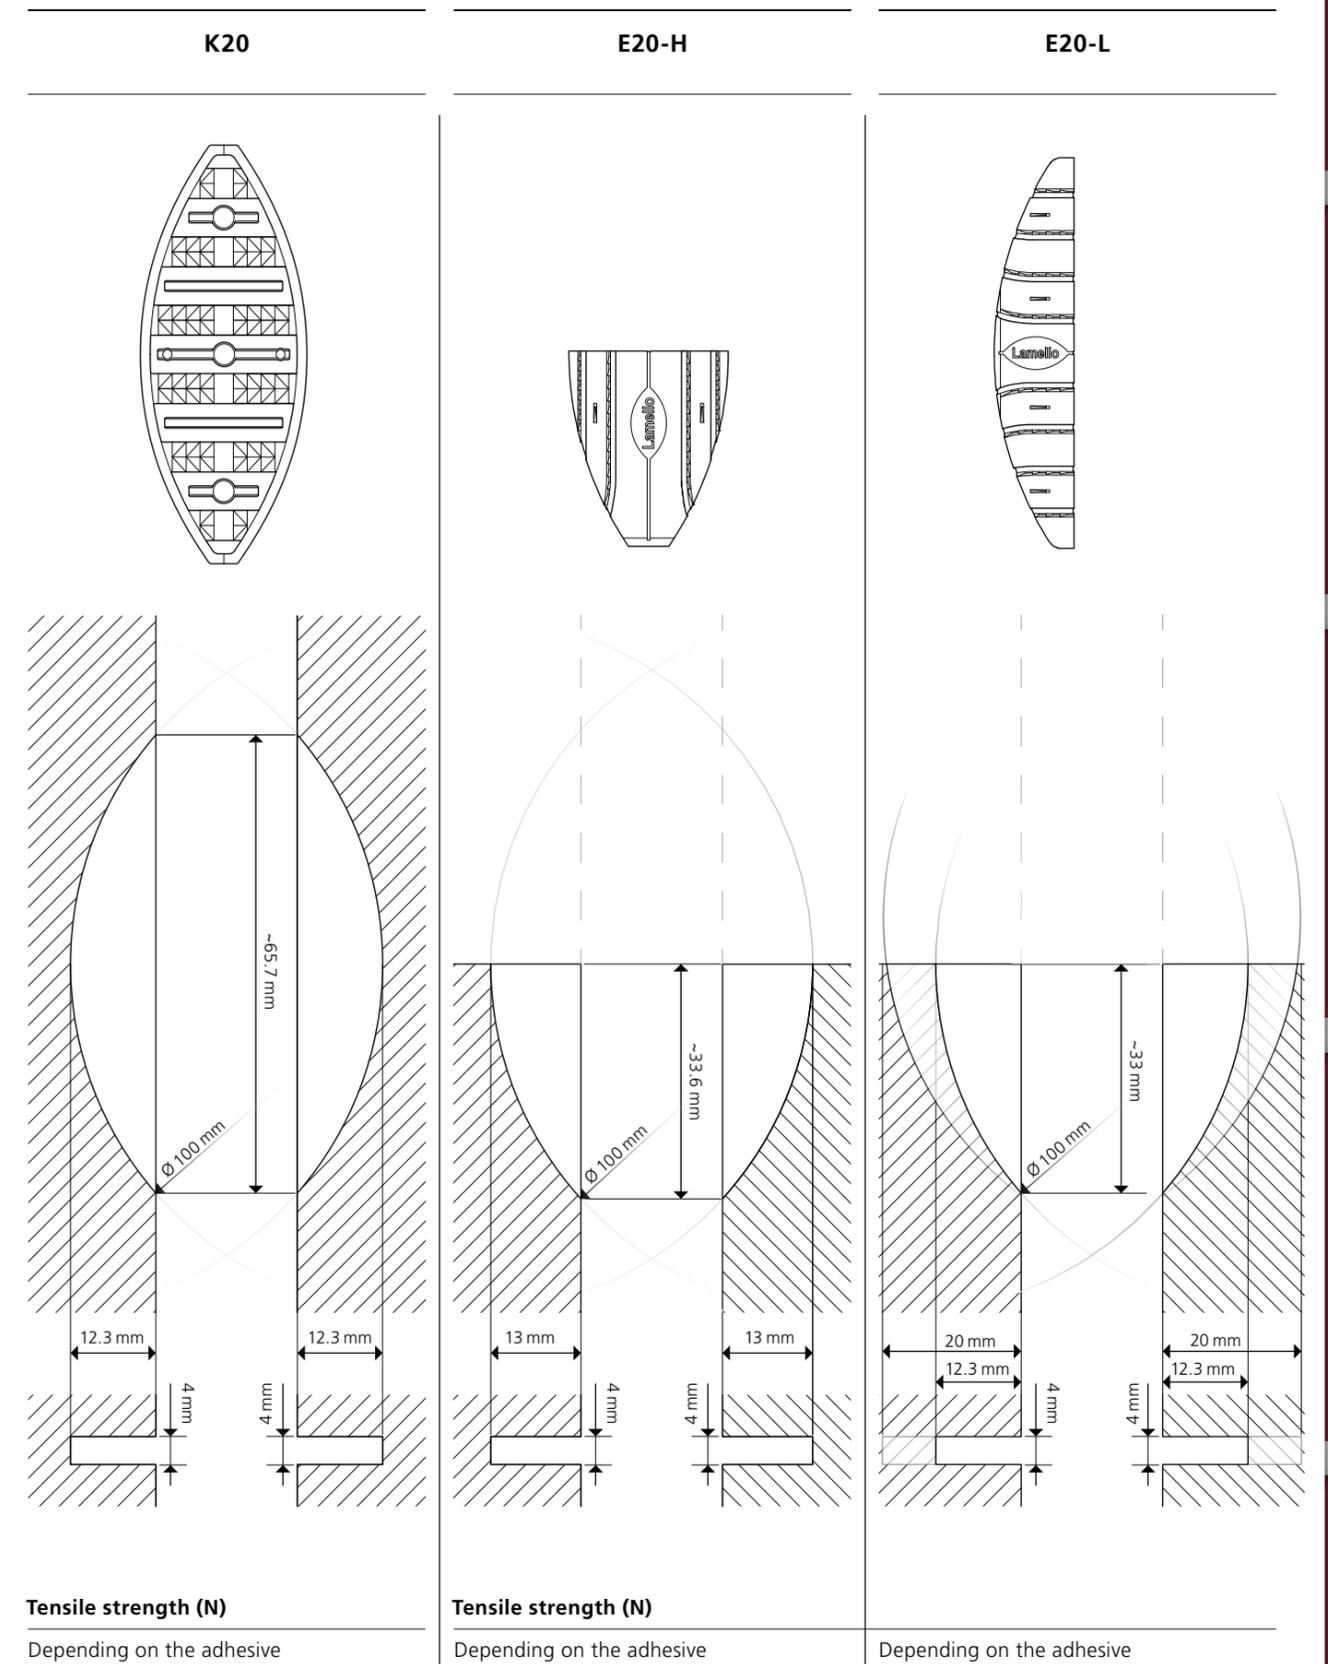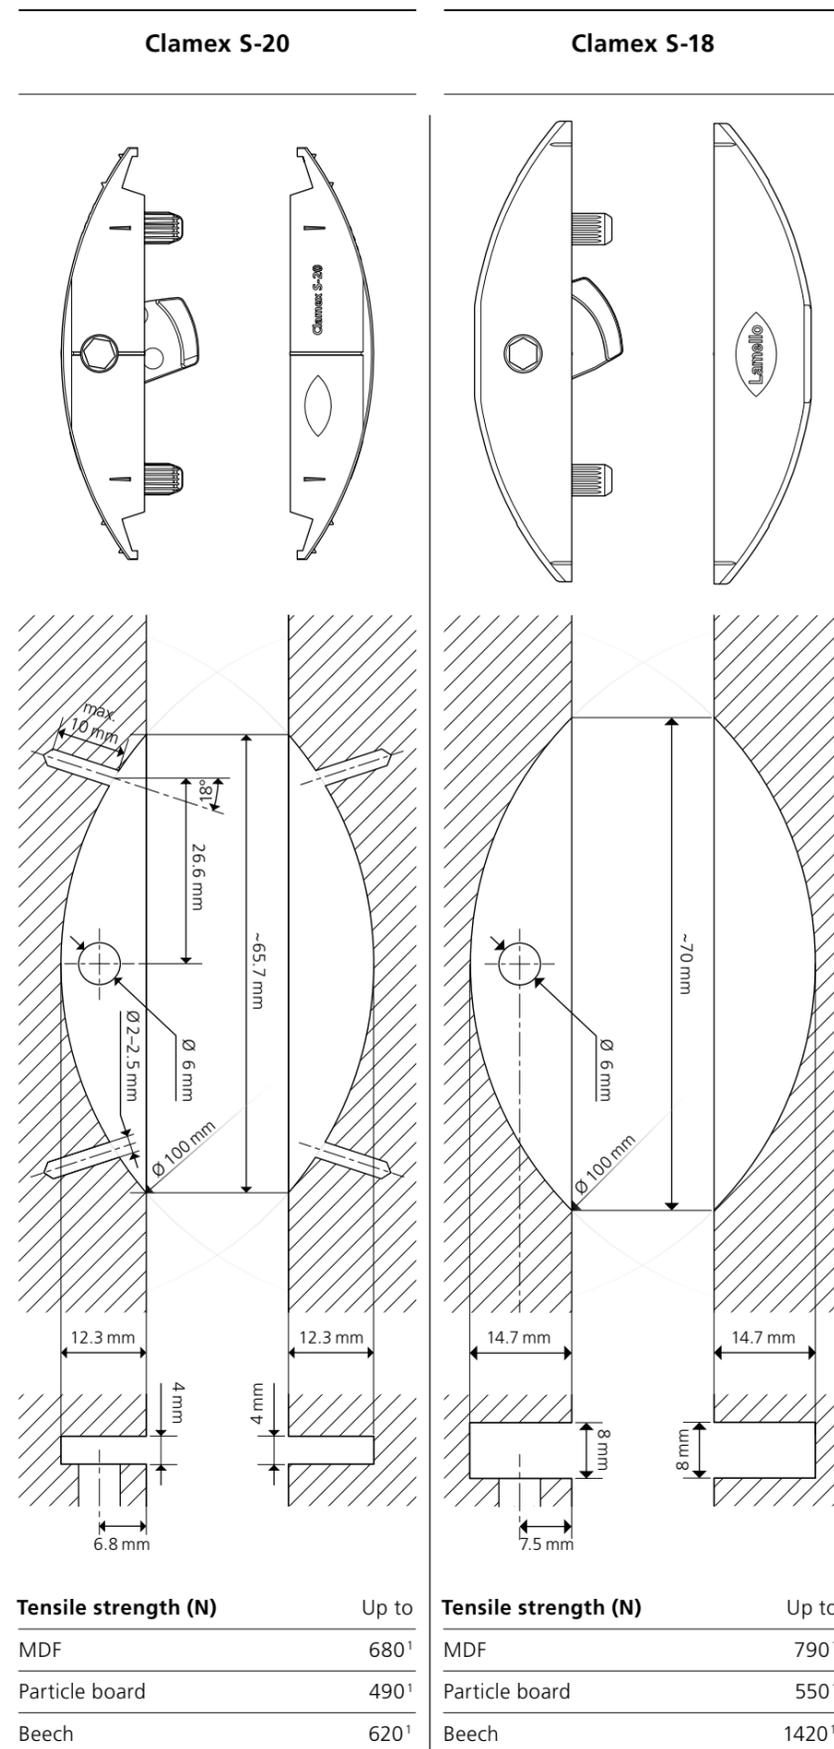


Drilling System


Unique drilling systems for high productive and aesthetic demands




Features Cabineo




Fast assembly




High clamping force



No edge drilling




No dowel holes




One-piece and pre-installed


Features Invis Mx2



High clamping force



Invisible




Detachable

Drilling System

- Cabineo
- Invis Mx2

Overview

Features	Connector	Machines		Sequence			
		Power tool	CNC machines	1 Processing	2 Connector insertion	3 Deliver flat pack	4 Assembly

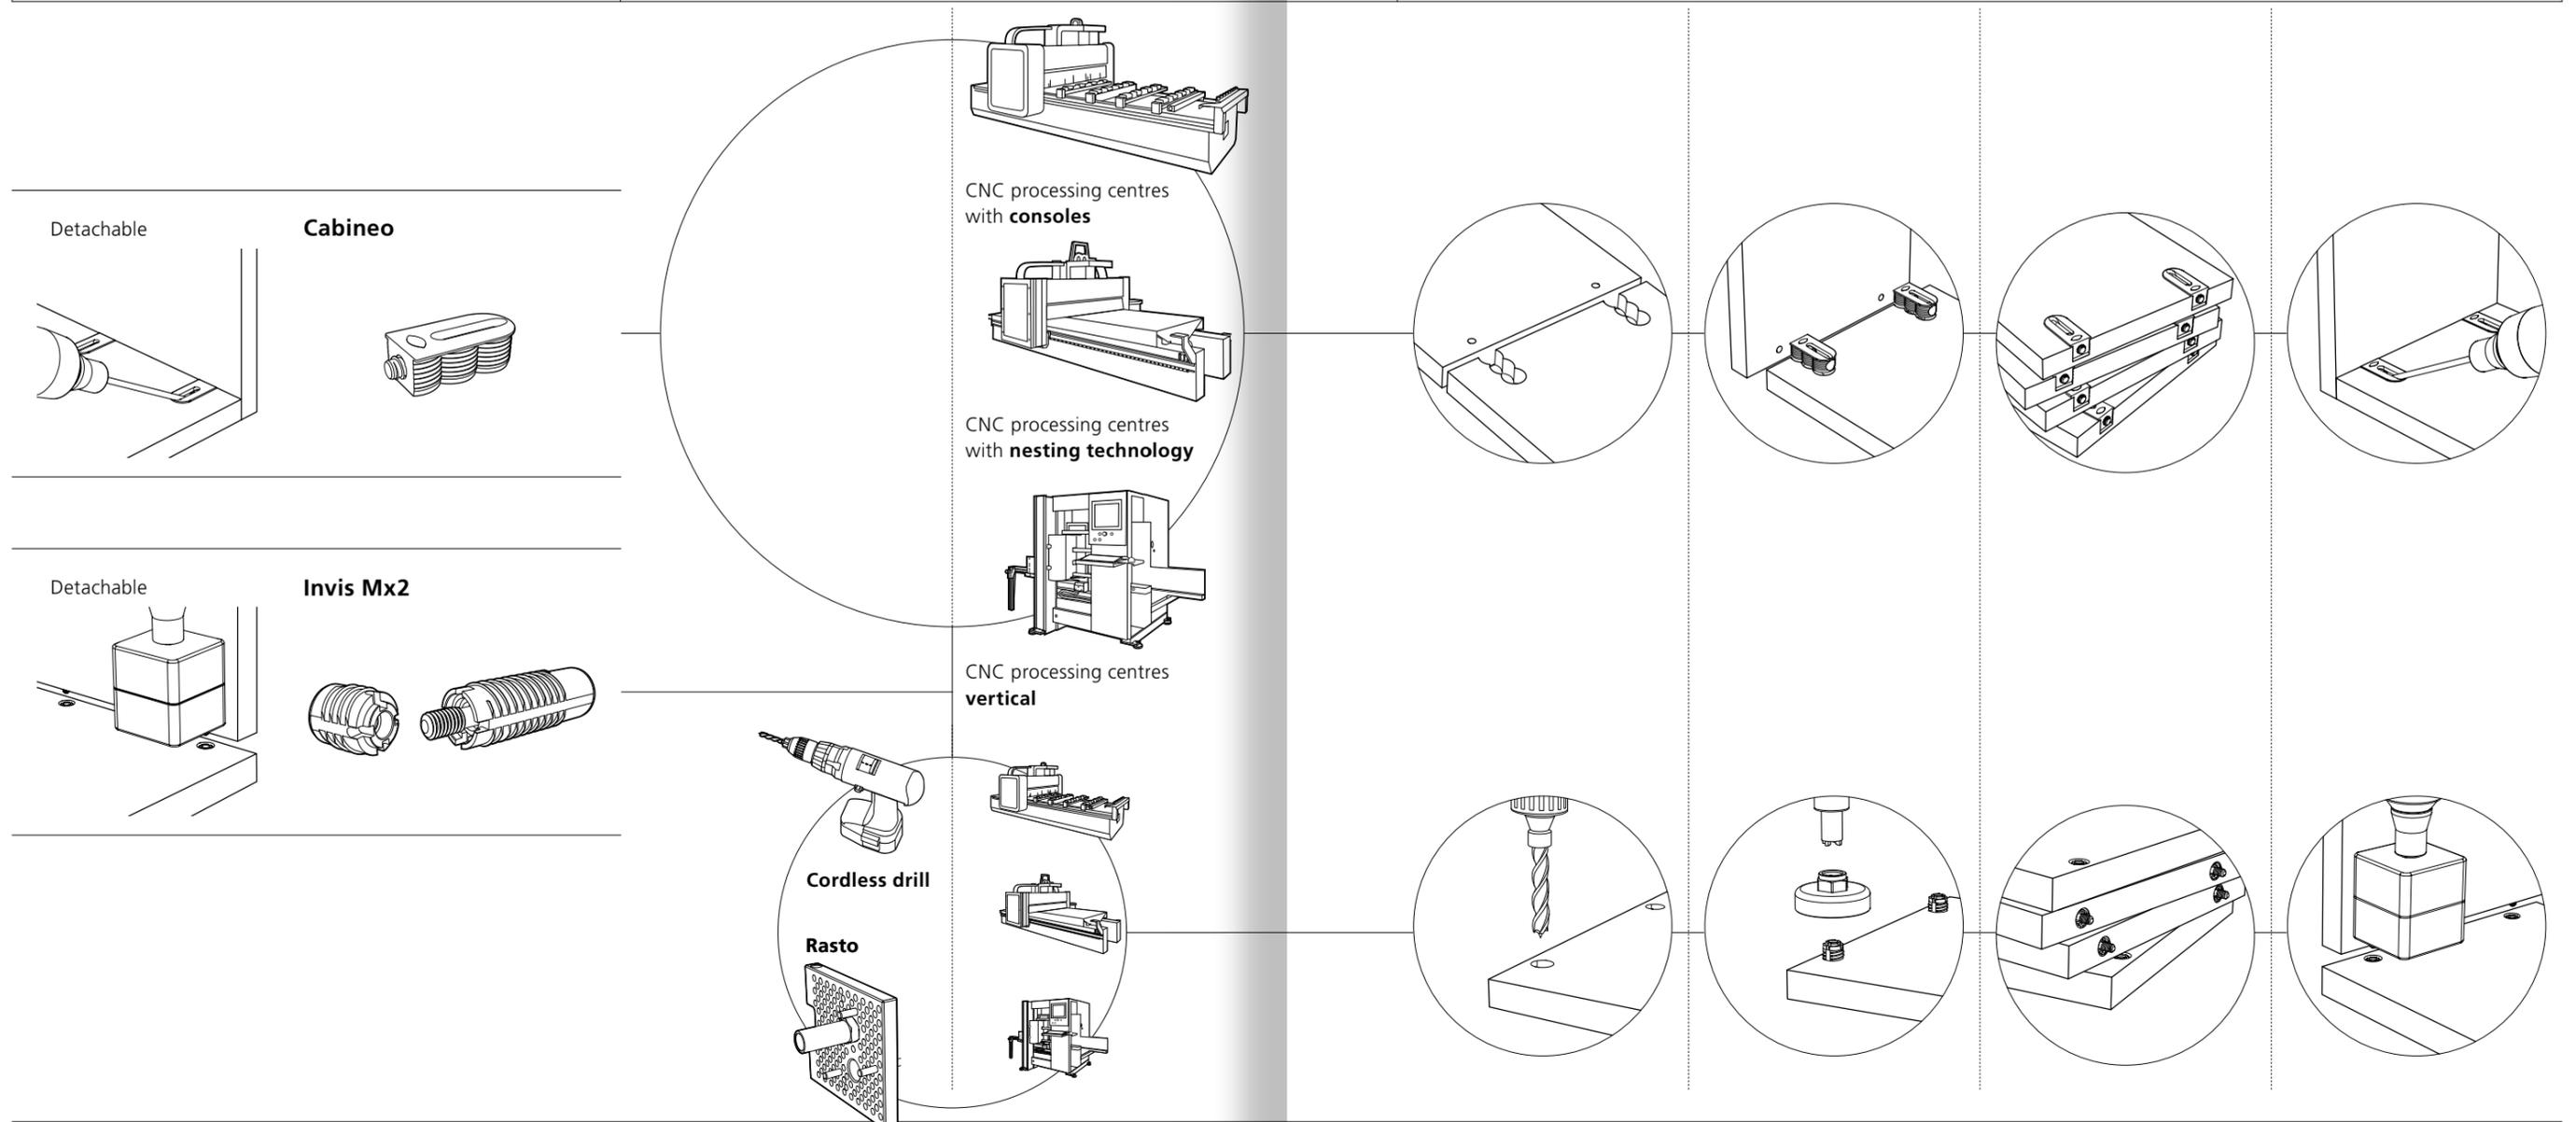

« We make a lot of furniture with wood and metal. The freedom that Cabineo offers us in joining these two materials is fantastic. »

Chris Wilkens, co-owner of Schreinerei Werkkollektiv, Germany







Drilling System

Applications

Furniture manufacturing



Interior fitting

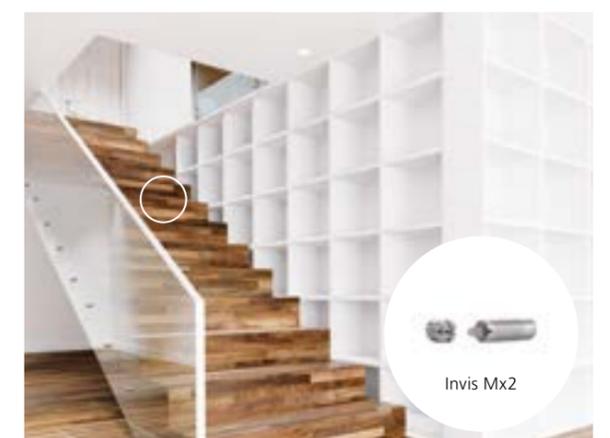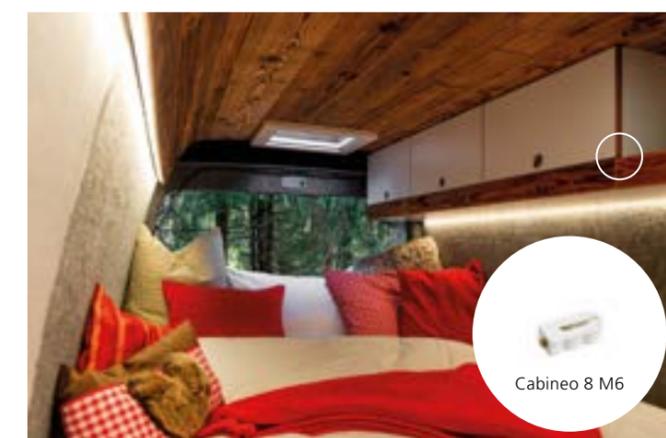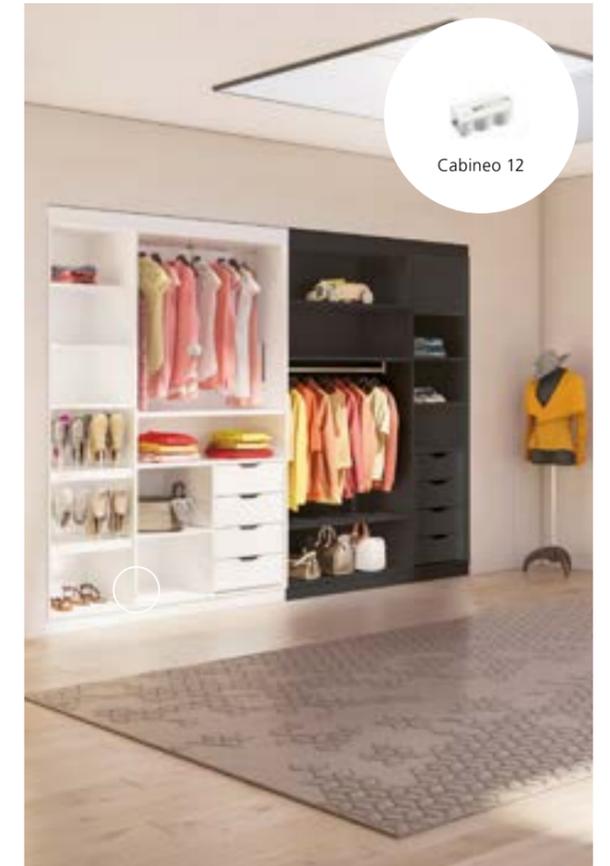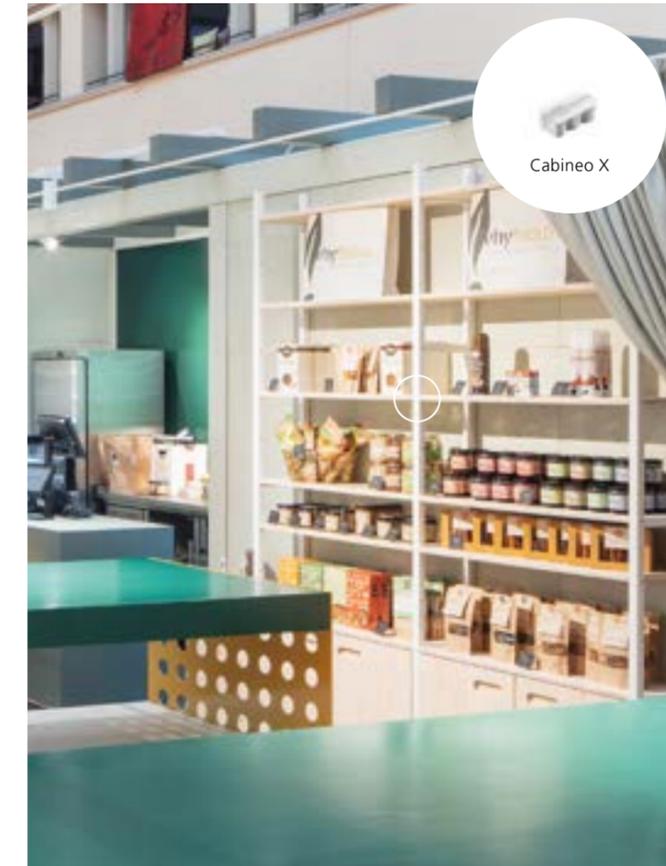

Drilling System

Applications

Kitchen manufacturing



Commercial joinery




Shop fitting

Cabineo 12

Time-saving cabinet connector for corner joints from 13 mm



Features

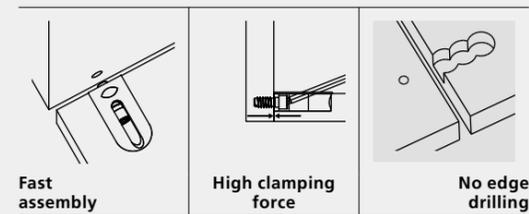

- Carcase connectors for time savings throughout the entire production chain
- For every CNC machine thanks to simple machining on the surface
- Perfectly tensioned joints due to the high clamping force
- Elimination of dowel drilling and installation leads to time savings
- Ideal for time-saving, stable carcasses and cabinets

Cabineo 12 is a one-piece cabinet connector which can be used with all CNC machines because only surface machining is required. The Cabineo is installed in the board either in the workshop or on site. The pre-assembled screw in the connector is screwed into the 5 mm hole of the second workpiece using a cordless drill. Cabineo impresses with its time-saving processing and assembly as well as the high clamping force which leads to stable connections without the need for additional dowels. Cabineo is available in white or black.

Articles


	Art. No.
Cabineo 12, 500 pieces	186320
Cabineo 12, 2000 pieces	186321
Cabineo 12 black, 500 pieces	186330
Cabineo 12 black, 2000 pieces	186331

	Art. No.
Cabineo 8/12 Starter set	186305
Scope of delivery: 40 x Cabineo 8, 40 x Cabineo 12, 40 x Cabineo cover caps, RAL 9003 signal white, Cabineo hexagon bit	

Matching accessories starting on PAGE 170



Installation

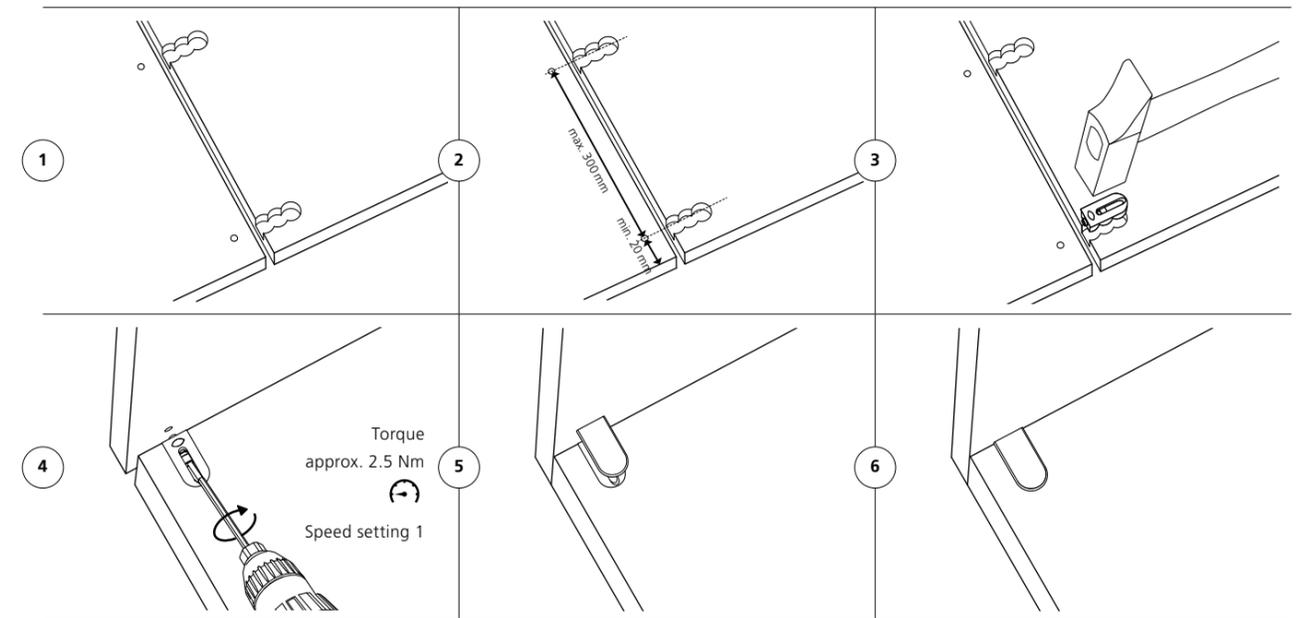

Technical data

Joining methods	Size	33.8 x 16.5 x 10.8 mm		
	Screw length	12 mm		
	Cutter	Ø 12 mm or smaller		
	Drill	Ø 5 mm and Ø 15 mm		
	Material housing	Fiberglass reinforced plastic		
	Installation tolerance	Long. ± 0.1 mm		
	Strength per connector without dowel (N)			
	Particle board 19 mm Up to	Tensile strength (N)	820 ¹	
		Shear strength (N)	880 ¹	
	Material range	10 N ~ 1 kg		
	Particle board, MDF, plywood, softwood, hardwood etc.			


See PAGE 148-149 for technical specifications | ¹ See technical notes on page PAGE 185

Cabineo 8

Time-saving cabinet connector for centre panels from 16 mm



Features

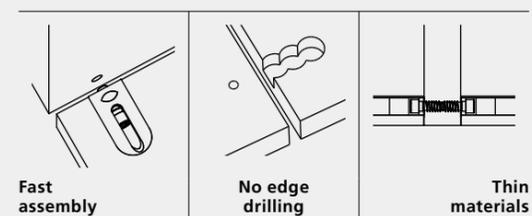

- Carcase connectors for time savings throughout the entire production chain
- For material thicknesses from 12 mm and center panels from 16 mm
- For every CNC machine thanks to simple machining on the surface
- Elimination of dowel drilling and installation leads to time savings
- Ideal for time-saving, stable carcasses and cabinets

Cabineo 8 is a one-piece cabinet connector which can be used with all CNC machines because only surface machining is required. The Cabineo is installed in the board either in the workshop or on site. The pre-assembled screw in the connector is screwed into the 5 mm hole of the second workpiece using a cordless drill. Cabineo impresses with its time-saving processing and assembly as well as the high clamping force which leads to stable connections without the need for additional dowels. Cabineo is available in white or black.

Articles


	Art. No.
Cabineo 8, 500 pieces	186310
Cabineo 8, 2000 pieces	186311
Cabineo 8 black, 500 pieces	186340
Cabineo 8 black, 2000 pieces	186341

	Art. No.
Cabineo 8/12 Starter set	186305
Scope of delivery: 40 x Cabineo 8, 40 x Cabineo 12, 40 x Cabineo cover caps, RAL 9003 signal white, Cabineo hexagon bit	

Matching accessories starting on PAGE 170




Installation

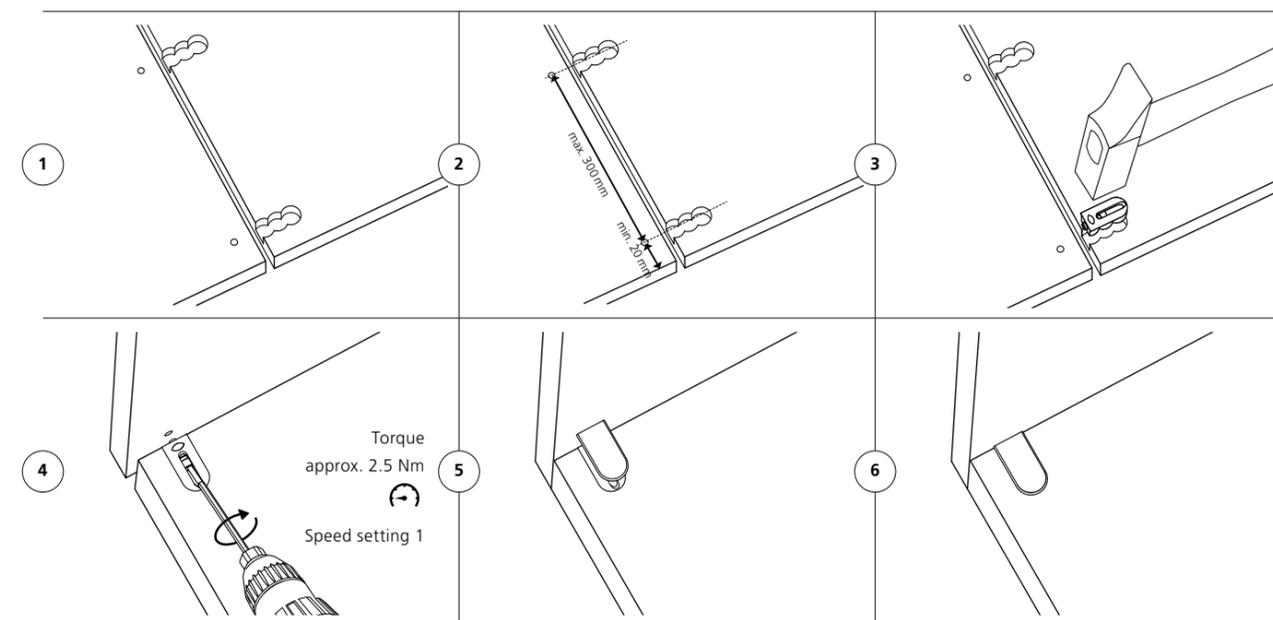

Technical data

Joining methods	Size	33.8 x 16.5 x 10.8 mm		
	Screw length	8 mm		
	Cutter	Ø 12 mm or smaller		
	Drill	Ø 5 mm and Ø 15 mm		
	Material housing	Fiberglass reinforced plastic		
	Installation tolerance	Long. ± 0.1 mm		
	Strength per connector without dowel (N)			
	Particle board 19 mm Up to	Tensile strength (N)	520 ¹	
		Shear strength (N)	530 ¹	
			10 N ~ 1 kg	
Material range	Particle board, MDF, plywood, softwood, hardwood etc.			

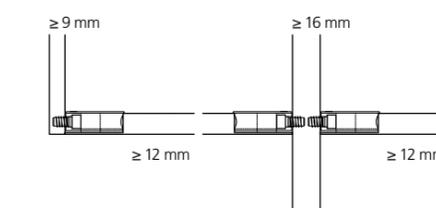

Cabineo 8 M6

Wear-resistant cabinet connector for various materials and increased strength



Features



- Time-saving carcass connector with metric screw
- For joining different materials and increased strength
- For every CNC machine thanks to simple machining on the surface
- Elimination of dowel drilling and installation leads to time savings
- Ideal for multiple furniture assemblies without wear and tear

Cabineo 8 M6 is a one-piece cabinet connector which can be used with all CNC machines because only surface machining is required. The connector is ideal when joining wood composites with materials such as aluminium, steel or compact laminate. After installing the connector in the board, the pre-assembled metric screw is screwed into a threaded hole or a socket, using a cordless drill. Cabineo impresses with its time-saving processing and assembly as well as the high clamping force which leads to stable connections without the need for additional dowels. Cabineo is available in white or black.

Articles




	Art. No.
Cabineo 8 M6, 500 pieces	186315
Cabineo 8 M6, 2000 pieces	186316
Cabineo 8 M6 black, 500 pieces	186345
Cabineo 8 M6 black, 2000 pieces	186346




Cabineo 8 M6 Starter set 186306
 Scope of delivery: 80 x Cabineo 8 M6, 40 x Cabineo insert 12.3 mm, 40 x Cabineo insert 15.3 mm, 40 x cover caps, RAL 9003 signal white, Cabineo hexagonal bit, Cabineo insertion tool

Matching accessories starting on PAGE 170

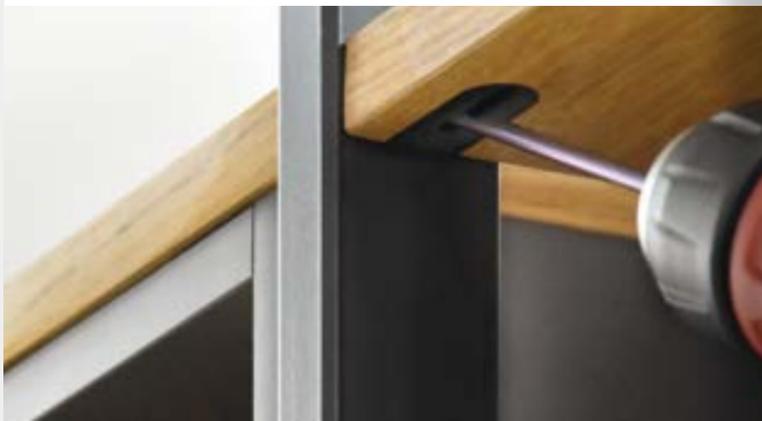


Installation

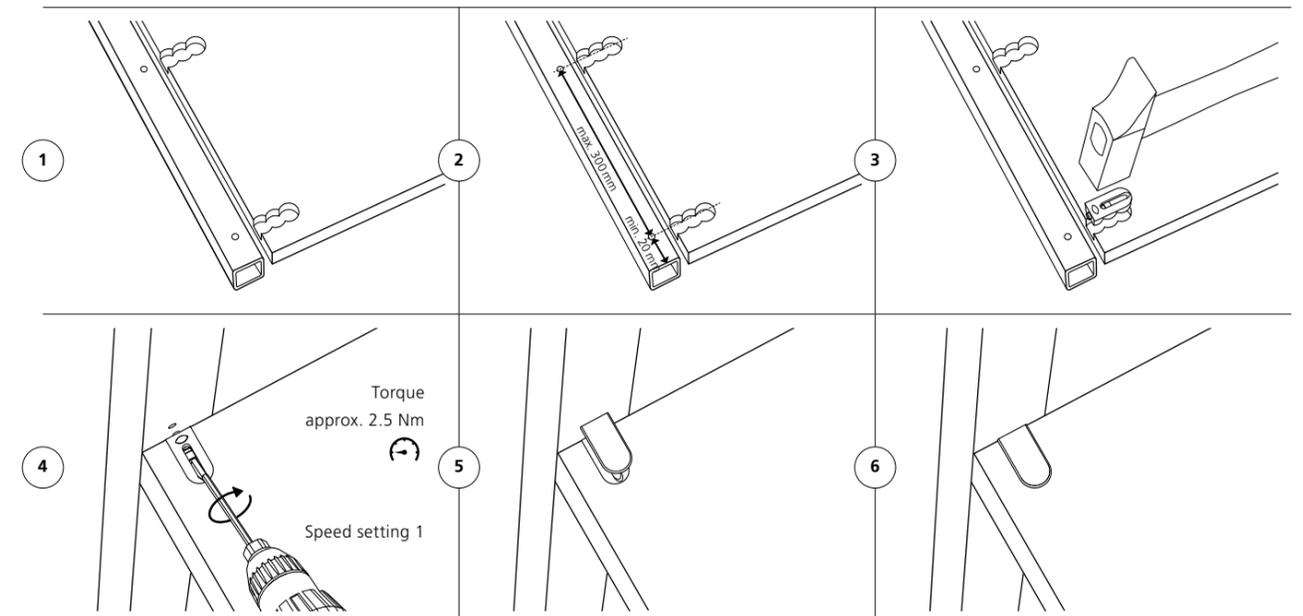

Technical data


Joining methods	Size	
	33.8 x 16.5 x 10.8 mm	
	Screw length	
	8 mm	
	Cutter	
	Ø 12 mm or smaller	
	Drill	
	Ø 15 mm	
	Screw thread	
	M6	
	Material housing	
	Fiberglass reinforced plastic	
	Installation tolerance	
	Long. ± 0.1 mm	
	Strength per connector without dowel (N)	
In HPL 12 mm Up to	Tensile strength (N)	Shear strength (N)
	2370 ¹	1350 ¹
	10 N ~ 1 kg	
Material range	Particle board, MDF, plywood, softwood, hardwood etc.	

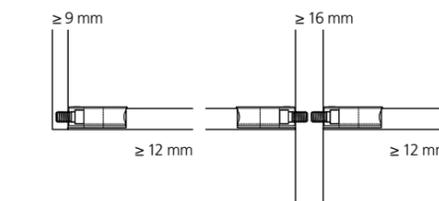

Cabineo insert M6

For repeated assembly and disassembly without loss of strength

Features

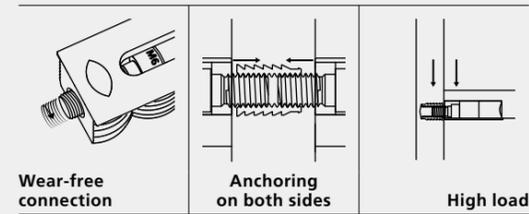

- Threaded socket in two sizes for Cabineo M6 screws
- Screwing in from both sides for center wall connections increases strength
- Efficient installation by hammering in
- High tensile strength in the wood due to the clawed retaining grooves
- Ideal for exhibition stand construction or the multiple assembly of furniture without wear and tear

The Cabineo insert M6 is a threaded insert to drive in, which can be used in combination with the Cabineo 8 M6. It is ideal for applications where the thread cannot be cut directly into the workpiece or to increase the strength in corner and dividing panel joints. The Cabineo insert M6 is hammered into the through-hole of the middle panel so that the Cabineo can reach into the insert from both sides. The same connector and insert can be used everywhere for corner and dividing panels.




Articles

	Art. No.
 Cabineo insert M6 x 12.3 mm, 100 pieces, incl. Cabineo insertion tool	186370
 Cabineo insert M6 x 12.3 mm, 500 pieces, incl. Cabineo insertion tool	186371
 Cabineo insert M6 x 15.3 mm, 100 pieces, incl. Cabineo insertion tool	186375
 Cabineo insert M6 x 15.3 mm, 500 pieces, incl. Cabineo insertion tool	186376

	276310
---	---------------


Matching accessories starting on PAGE 170

Installation

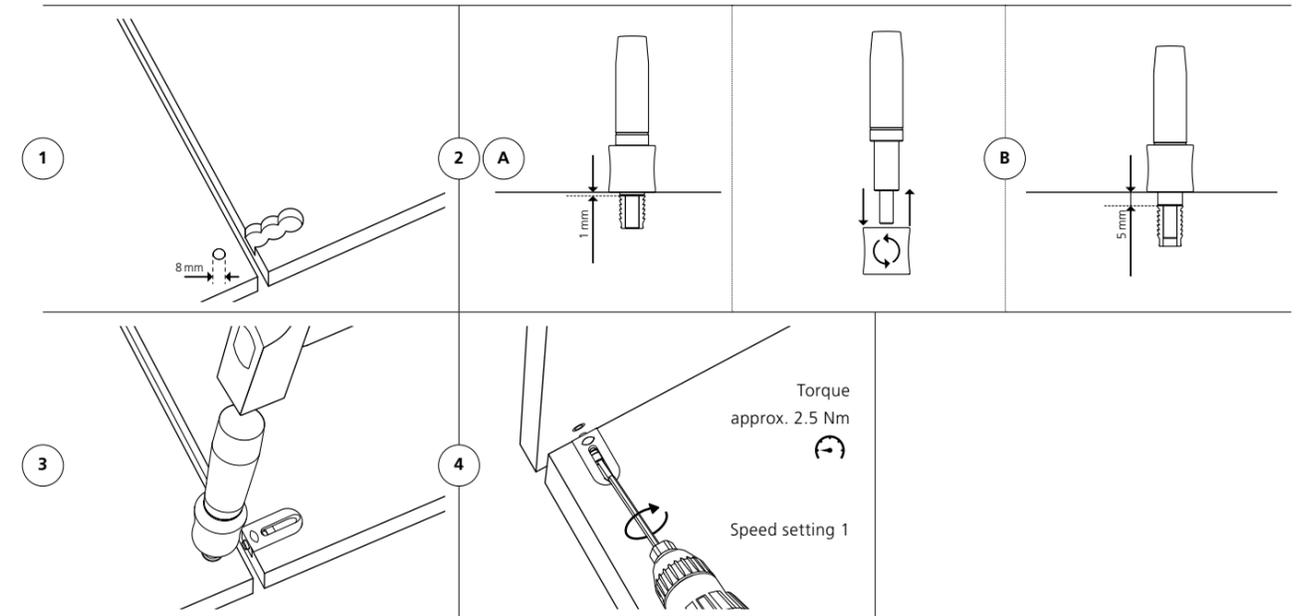


Technical data

Joining methods

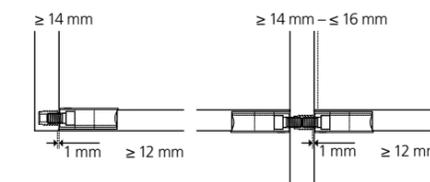

Cabineo insert M6 x 12.3 for material thickness 14–16 mm

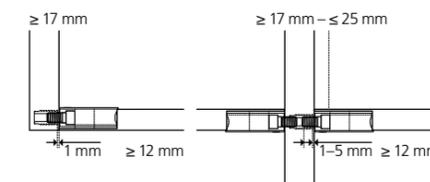

Cabineo insert M6 x 15.3 for material thickness 17–25 mm

Size	Ø 9.3 x 12.3/15.3 mm	
Thread	M6	
Drill hole	Ø 8 mm	
Material	Brass	
Installation tolerance	Long. ± 0.1 mm	
Strength per connector without dowel (N)		
Particle board 19 mm Up to	Tensile strength (N)	Shear strength (N)
Insert M6 x 12.3	810 ¹	1210 ¹
Insert M6 x 15.3	940 ¹	1240 ¹
10 N ~ 1 kg		
Material range	Particle board, MDF, plywood, softwood, hardwood etc.	


See PAGE 149 for technical specifications | ¹ See technical notes on page PAGE 185

Cabineo X

Cabinet connector and shelf support without edge drilling



Features

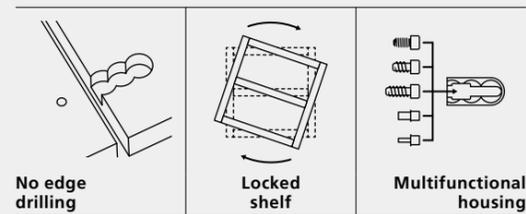

- Time-saving carcass connector with open housing
- Can be used with Cabineo X screws or shelf supports
- Flexible and simple positioning of the cabinet cover and shelves
- For every CNC machine thanks to simple machining on the surface
- Ideal for shelves, built-in cupboards, access panels and adjustable shelves


Cabineo X is a connector for cabinets and shelves, that can be used with all CNC machines and is pressed into place in the workshop or on site. Due to the open housing, it is possible to insert a Cabineo screw from the top and screw it into the counterpart with a hexagon bit. Using it with screws, Cabineo X is ideal when installing shelves into already joined cabinets or when assembling corner joints. Combined with shelf supports, Cabineo X prevents shelves from being pulled out.

Articles

	Art. No.
 Cabineo X, 500 pieces	186360
 Cabineo X, 2000 pieces	186361
 Cabineo X black, 500 pieces	186365
 Cabineo X black, 2000 pieces	186366
 Cabineo 12 screw, 500 pieces	186380
 Cabineo 12 screw, 2000 pieces	186381
 Cabineo 8 screw, 500 pieces	186382
 Cabineo 8 M6 screw, 500 pieces	186384
 Cabineo X shelf support Ø 5, 500 pieces	186386
 Cabineo X shelf support Ø 3, 500 pieces	186388

 Cabineo X Starter Set	186307
Scope of delivery: 80 pieces Cabineo X, 40 pieces Cabineo 12 screw, 20 pieces Cabineo 8 screw, 20 pieces Cabineo 8 M6 screw, 20 pieces Cabineo X shelf support Ø 5, 20 pieces Cabineo X shelf support Ø 3, 40 pieces Cabineo cover caps signal white, 1 piece Cabineo X screw-in aid, 1 piece Cabineo hexagonal bit 1/4" GL 80 mm	

Installation

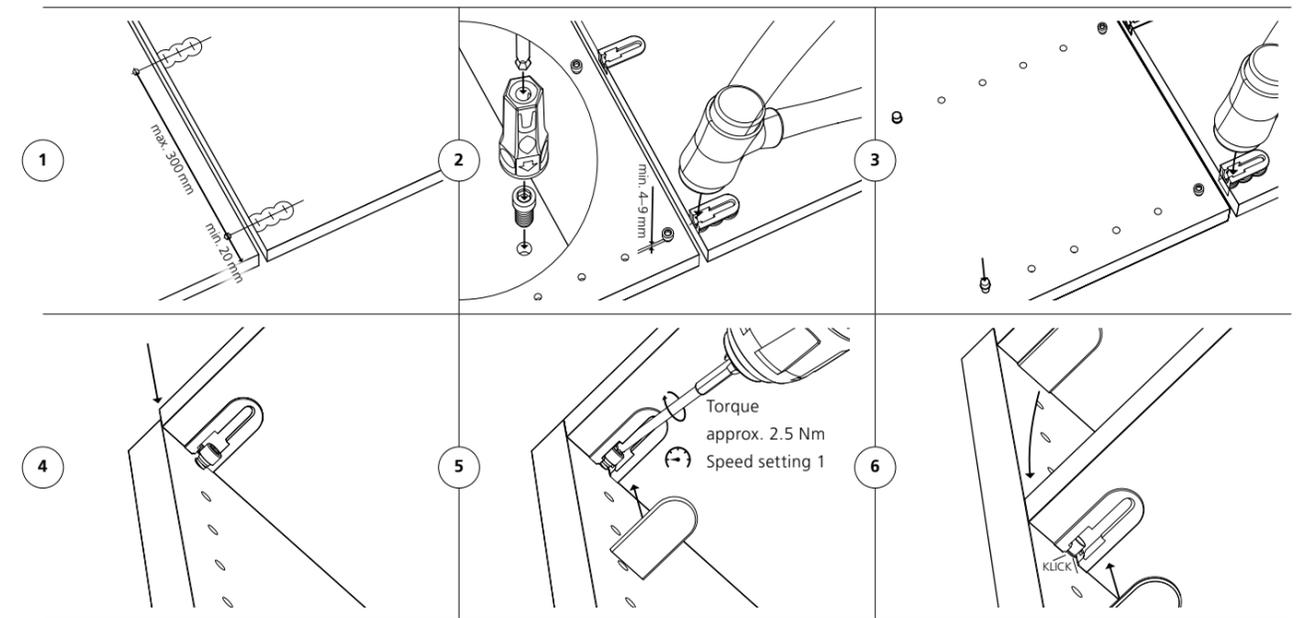

Technical data

Joining methods	Size	Strength per connector without dowel (N)	
	33.8 × 16.5 × 10.8 mm		
	Screw length	8 mm or 12 mm	
	Shelf support	Ø 3 mm or Ø 5 mm	
	Cutter	Ø 12 mm or smaller	
	Drill	Ø 5 mm and Ø 15 mm	
	Material housing	Fiberglass reinforced plastic	
	Installation tolerance	Long. ± 0.5 mm	
	Particle board 19 mm Up to	Tensile strength (N)	Shear strength (N)
	Cabineo 8 screw	480 ¹	530 ¹
	Cabineo 12 screw	770 ¹	850 ¹
	Material range	Particle board, MDF, plywood, softwood, hardwood etc.	

Advantages of Cabineo

Simple, fast and strong

1. Advantages in production

Time-saving in production



- Optimised process due to surface machining; no edge drilling necessary
- Only one tool change from 5 mm to 15 mm drill; no tool change for the dowel hole drill necessary
- No dowel holes means less drill holes per connector
- Shallow element of 10 mm allows for panels from 12 mm thickness

2. Advantages in transportation

Time-saving in transportation



- Efficient pre-installation of the one-piece connector in the factory
- Flat pack delivery with pre-installed connectors
- No extra bags or loose hardware required with furniture shipment
- Detachable for transport or if the fixed shelves need adjusting

3. Advantages in assembly


Time-saving in the assembly



- One-piece connector without dowels; no pre-assembly of screws or dowels in the side panels necessary
- Easy positioning of the Cabineo in the corresponding hole due to the protruding screw
- Fast assembly with a cordless drill
- Installation of fixed shelves or vertical dividers in an already assembled unit

Cabineo compared with cam and dowel

Manufacturing process with Cabineo



4 surface processing steps
1 tool change



Fit Cabineo into top or bottom shelf



Flat pack the workpieces



Assemble using a cordless drill

Manufacturing process with cam




3 surface processing steps
2 tool changes




2 edge drill holes
1 tool change



Prepare fitting bag



Flat pack the workpieces



Insert cam into shelf



Install the screw in the side
Insert dowel into the side



Assemble using a screwdriver

Examples of manufacturing and assembly processes

Cabineo



Flatpack workpiece delivery with pre-assembled connector.



Place furniture side on base. The element is correctly positioned by the protruding screw.



Join furniture elements with cordless drill and Cabineo tool. Easy, fast working with preset torque approx. 2.5 Nm.



Position top and push towards the furniture side.



Screw front corner in place with a cordless drill. This makes one-man assembly easy.




After assembly, fasten the fixed intermediate shelves in the required positions.



Tip:
 – Place one side of the shelf on the shelf support and fasten the other side
 – Retract the screw to facilitate installation.




If required, use cover caps on the Cabineo.

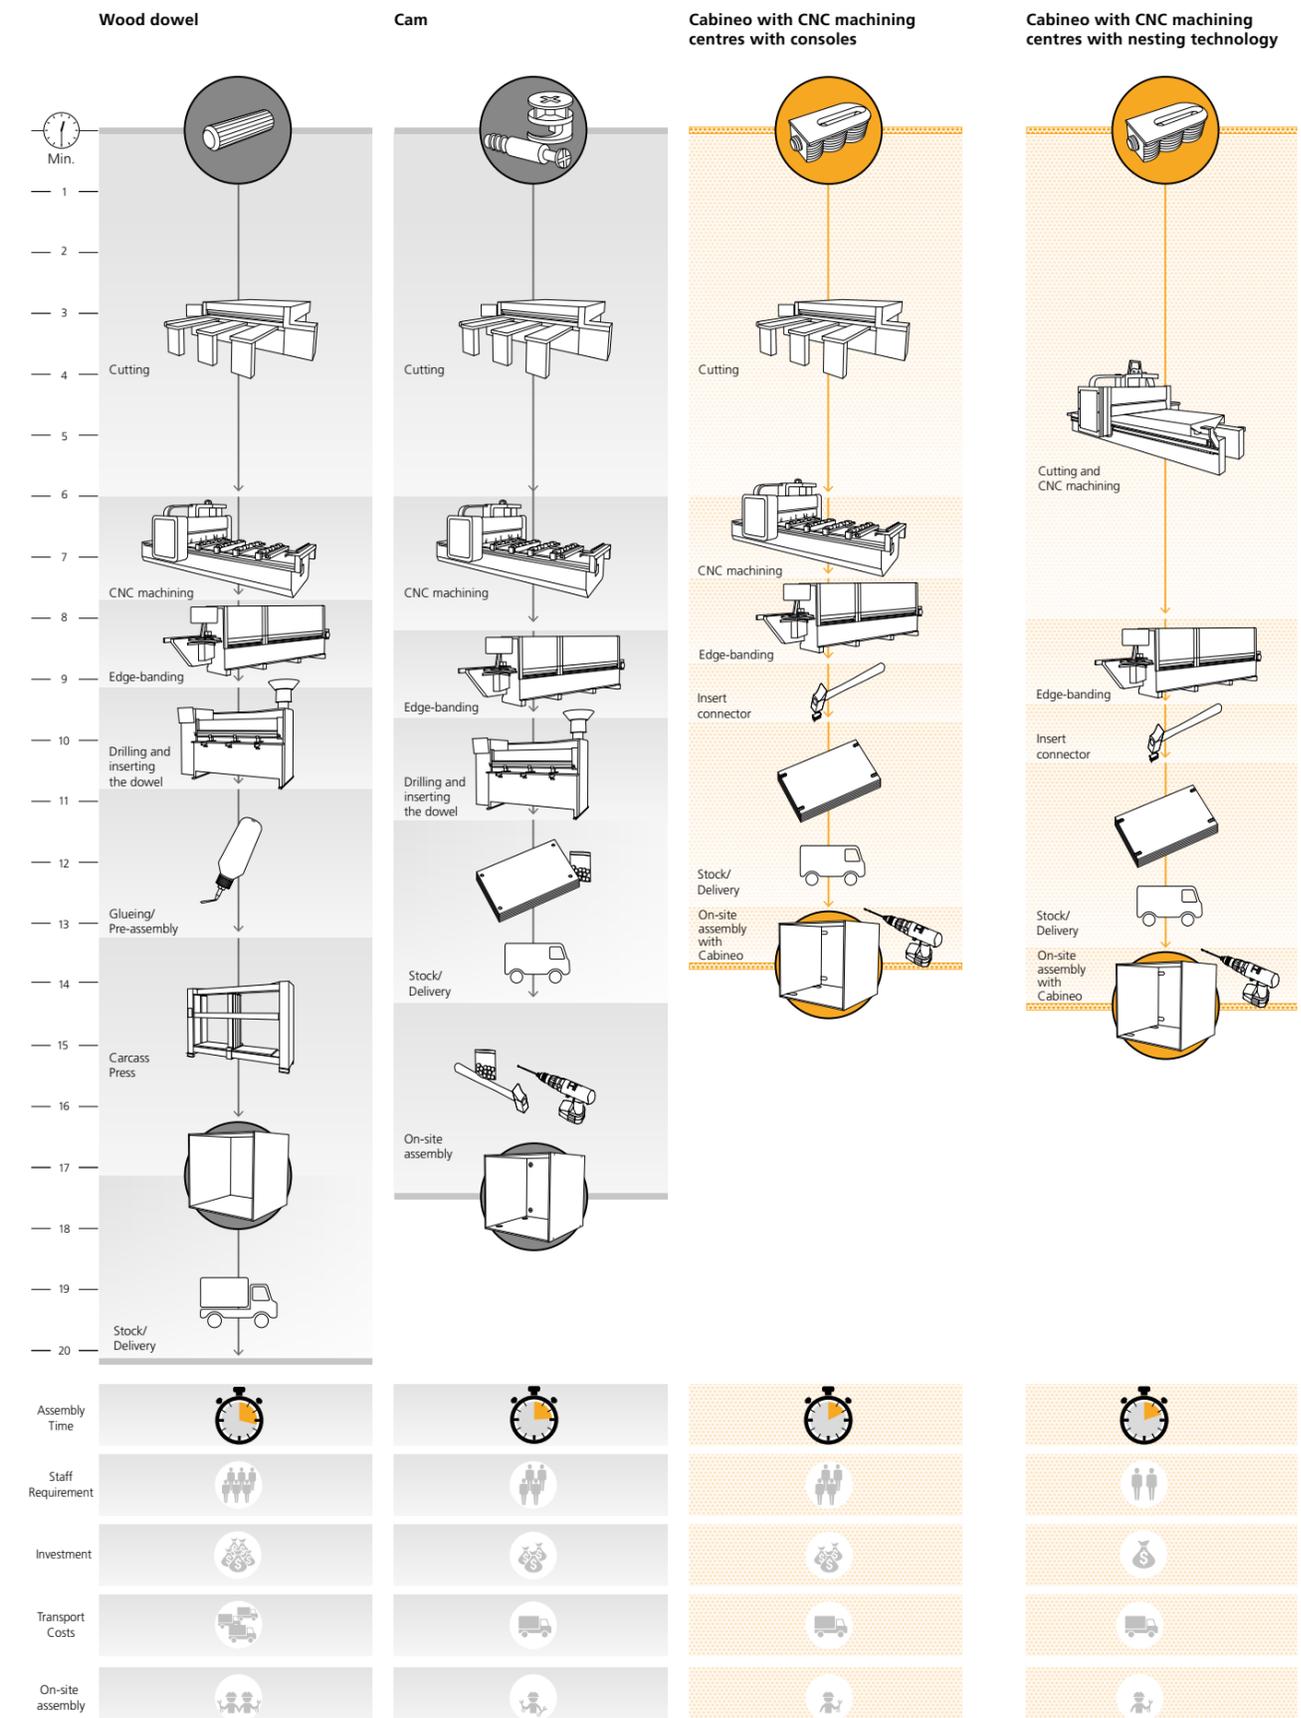

Invis Mx2

Magnet-driven connecting fittings

Features

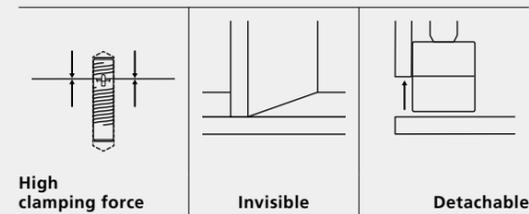

- Magnetically driven, detachable furniture connector
- Enormously high clamping force of up to 250 kg per connector
- Invisible connection for maximum aesthetics
- Wear-free detachable with MiniMag Mx2 and cordless screwdriver
- Ideal for high-quality furniture, lacquered or molded workpieces, tables, stairs

Invis Mx2 is a unique, magnet-driven connection for the highest demands on aesthetics, stability and productivity. With no visible openings, Invis Mx2 is connected and disconnected quickly again and again, using its magnetic drive. Invis Mx2 connectors are screwed into the 12 mm drill holes in the panel. Using the MiniMag with a cordless drill, the connection closes and creates a clamping force of up to 250 kg per connector. Ideal for high gloss painted furniture, molded workpieces, stairs, etc.

Articles



Art. No.

Invis Mx2 connector set, 20 pairs incl. 14 mm studs **6012300**



Invis Mx2 connector set, 20 pairs incl. 30 mm studs **6012301**




Invis Mx2 Starter Set, in systainer **6100302**

Kit contains: 20 x Invis Mx2 with stud 14 mm, Invis Mx2 screw bit, Invis Mx2 insertion jig, MiniMag Mx2 inkl. flexible shaft, Rasto perforated plate, positioning bolts, fastening screw, Rasto drill bushings Ø 12 mm drill Ø 12 mm, depth adjuster, spacer

Matching accessories starting on PAGE 170




Installation

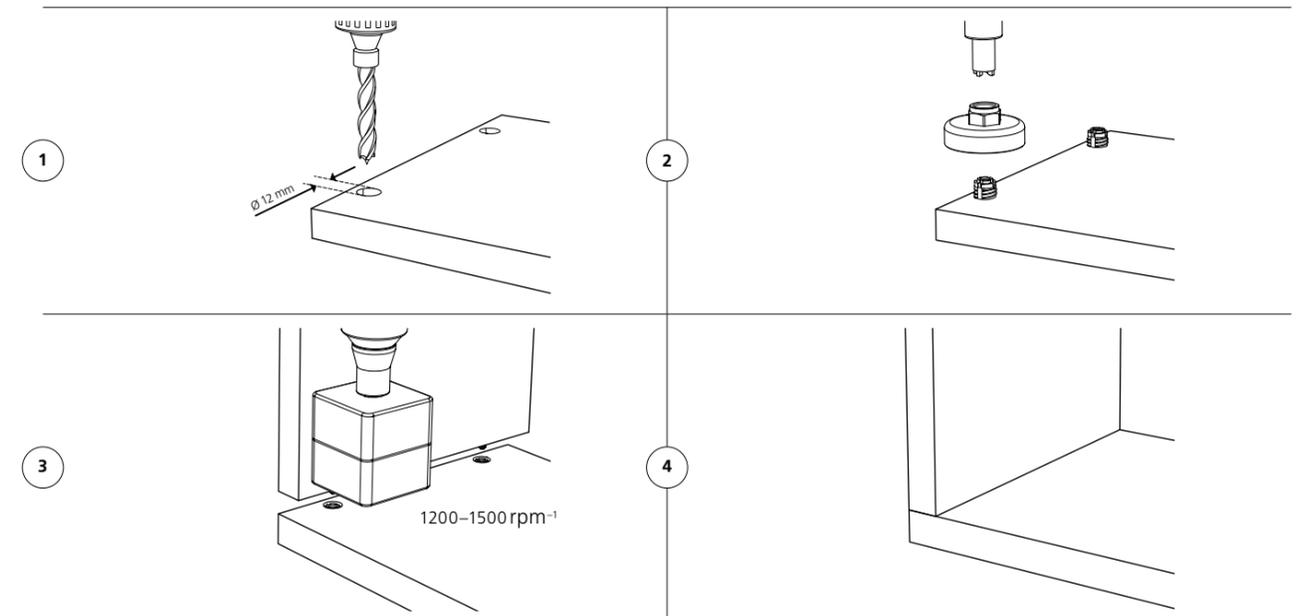

Technical data

Joining methods

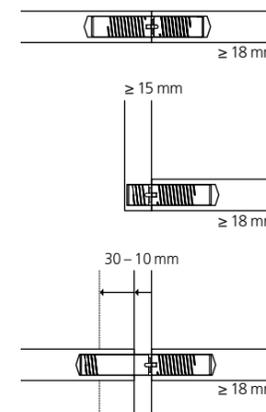

Size connector	Ø 12 x 35 mm		
Size stud	Ø 12 mm x 30/14 mm		
Size centre-wall stud	Ø 12 mm x 30 mm		
Drill	Ø 12 mm		
Speed MiniMag	Must be 1200–1500 rpm ⁻¹		
Material housing	Zinc		
Installation tolerance	Long. ± 0.1 mm		
Clamping force per connector	250 kg ¹		
Tensile strength (N)	Connector sets		
Up to	with stud	14 mm	30 mm
	MDF	1460 ¹	2260 ¹
	Particle board	1220 ¹	1580 ¹
	Beech	3280 ¹	5130 ¹
Material range	Particle board, MDF, plywood, softwood, hardwood etc.		

See **PAGE 150–151** for technical specifications | ¹ See technical notes on page **PAGE 185**



Articles



Invis Mx2 connector 35 mm, 20 pieces

Art. No.
6012317



Invis Mx2 stud 14 mm, 20 pieces

6012312



Invis Mx2 stud 30 mm, 20 pieces

6012309



Invis Mx2 centre wall stud, 10 pieces



6012208



Invis Mx2 MiniMag, incl. screw bit

6100301

Function

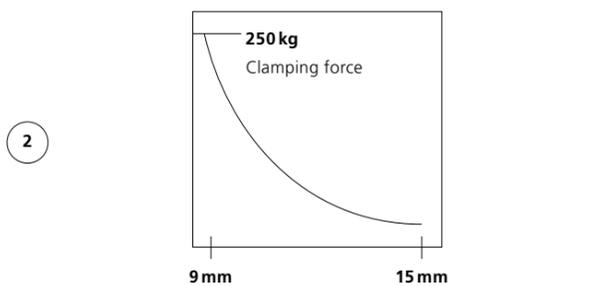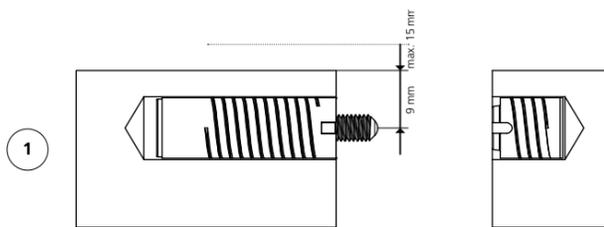

Small distance from the edge for high clamping force


Matching accessories starting on PAGE 170

Rasto drill jig

Universal drill jig without measuring or marking



Features

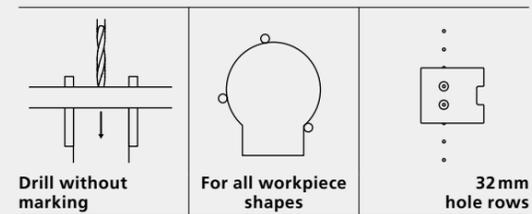

- Precise drilling jig for timber joints with Invis Mx2 connecting fittings
- Transfer drilling position from workpiece to workpiece instead of marking it
- With three positioning pins for clamping on almost all workpiece shapes
- Drill bushes with different diameters for many applications
- Ideal for Invis Mx2 connectors, furniture handles, pot hinge cross plates, 32 mm rows of holes

Rasto is a universal drilling jig and is used for creating precise drilled holes for Invis Mx2. The drilling jig can be clamped onto almost any workpiece shape by means of three positioning pins without measuring or marking. After the first workpiece has been drilled, the position is transferred unchanged to the second workpiece. Working in this way means the holes will always line up with each other. Rasto is also suitable for 8 mm dowel holes or 5 mm holes for handles or for row hole drilling.

Articles



Art. No.

Rasto Duo Set, in systainer incl. accessories 126007
 Kit contains: 2 x Rasto perforated plate, 8 x Rasto drill bushes $\varnothing 5$, $\varnothing 8$, $\varnothing 10$, $\varnothing 12$ mm, 3 x drills $\varnothing 5$, $\varnothing 8$, $\varnothing 12$ mm, with depth adjuster, 6 x Rasto positioning pins, 2 x Rasto fastening screw, Rasto connection rod 500 mm two-part, Invis Mx2 insertion bush, Invis Mx2 spacer $\varnothing 12$ mm


Rasto Basic Set, in carton incl. accessories 126005
 Scope of delivery: Rasto perforated plate, positioning pins, screw, 4 x Rasto drill bushes $\varnothing 5$, $\varnothing 8$, $\varnothing 10$, $\varnothing 12$ mm

Rasto Mono Set, in systainer incl. accessories 126006
 Kit contains: Rasto perforated plate, 4 x Rasto drill bushes $\varnothing 5$, $\varnothing 8$, $\varnothing 10$, $\varnothing 12$ mm, 3 x wood drill bits $\varnothing 5$, $\varnothing 8$, $\varnothing 12$ mm, with depth adjuster, 3 x Rasto positioning pins, 2 x Rasto fastening screw, Invis Mx2 insertion bush, Invis Mx2 spacer $\varnothing 12$ mm

Matching accessories starting on PAGE 170




Installation

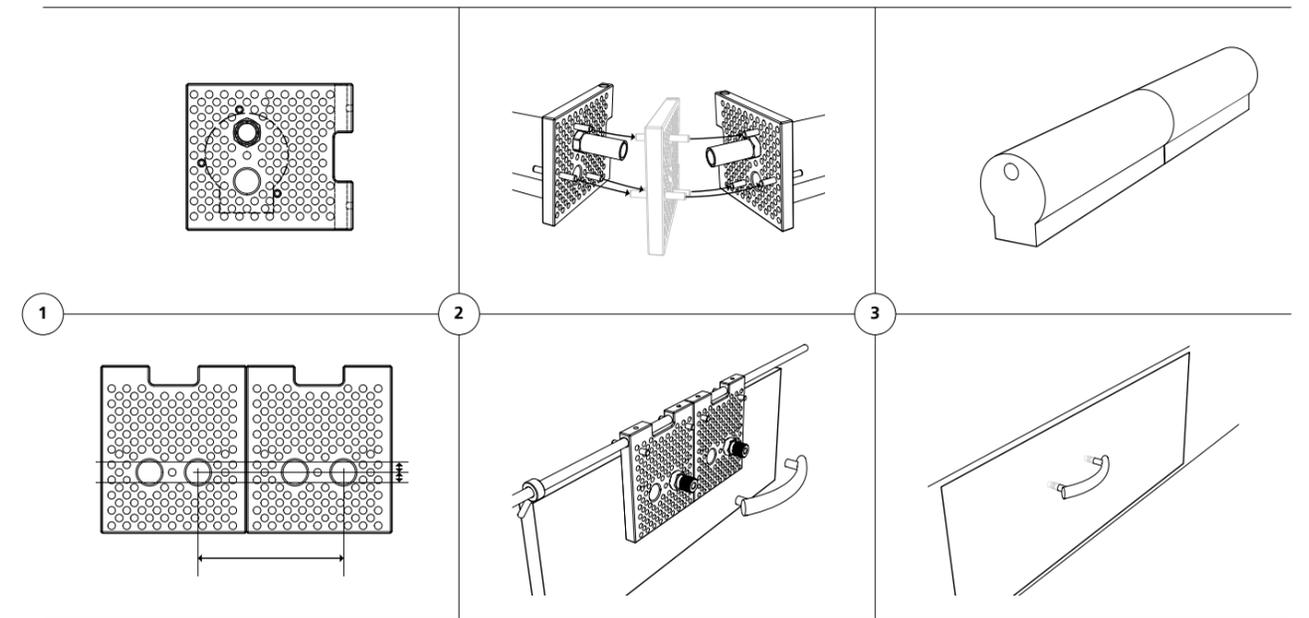

Technical data

Rasto perforated plate




Size Rasto plate	110 x 96 x 12 mm
Material Rasto plate	Polycarbonate

Technical information


Machining Cabineo

Installation options


On the surface

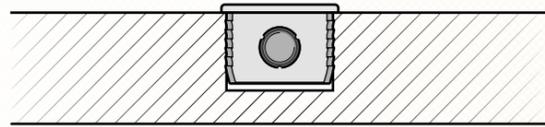


Flush with the surface

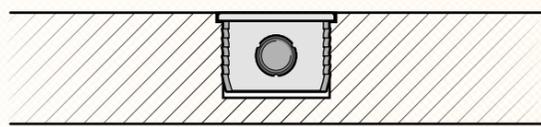

Flush cover cap

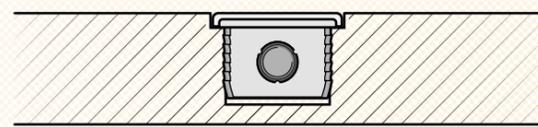


HPL on the surface

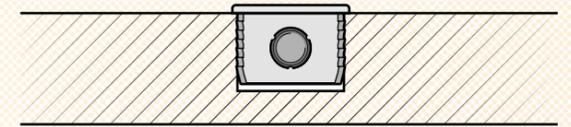


Machining options


Cabineo 8: X = 8 mm, black screw
Cabineo 12: X = 12 mm, nickel-plated screw
Cabineo 8 M6*: X = 8 mm, yellow galvanised screw
 * Metric ISO thread DIN 13-1
Cabineo X shelf support Ø 5: X = 8 mm / Y = 5 mm
Cabineo X shelf support Ø 3: X = 8 mm / Y = 3 mm

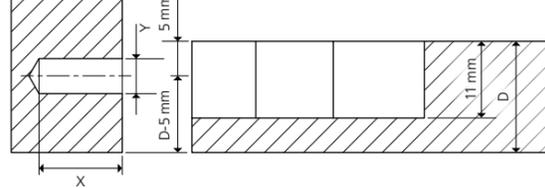


Cabineo 8: X = 8 mm, black screw
Cabineo 12: X = 12 mm, nickel-plated screw
Cabineo 8 M6*: X = 8 mm, yellow galvanised screw
 * Metric ISO thread DIN 13-1
Cabineo X shelf support Ø 5: X = 8 mm / Y = 5 mm
Cabineo X shelf support Ø 3: X = 8 mm / Y = 3 mm

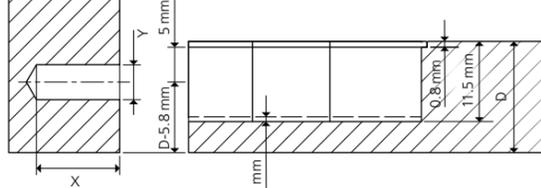





Cabineo 8: X = 8 mm, black screw
Cabineo 12: X = 12 mm, nickel-plated screw
Cabineo 8 M6*: X = 8 mm, yellow galvanised screw
 * Metric ISO thread DIN 13-1
Cabineo X shelf support Ø 5: X = 8 mm / Y = 5 mm
Cabineo X shelf support Ø 3: X = 8 mm / Y = 3 mm

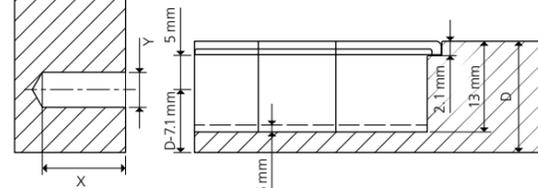





Cabineo 8 M6*: X = 8 mm, yellow galvanised screw
 * Metric ISO thread DIN 13-1

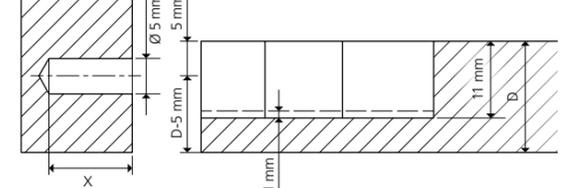



Drill 15 mm

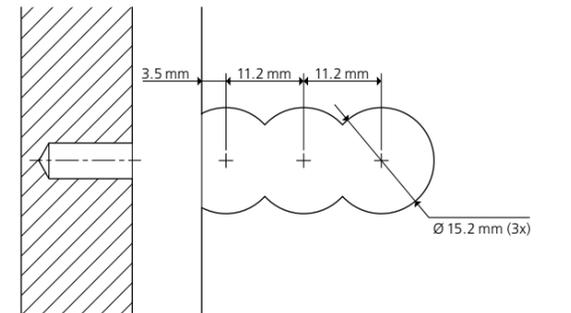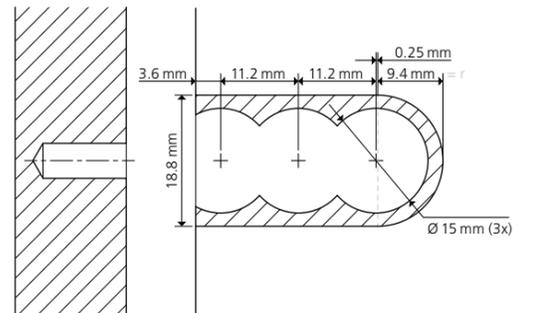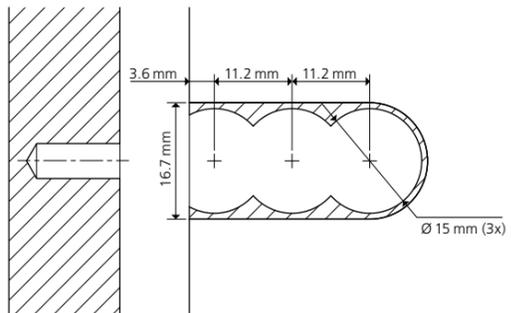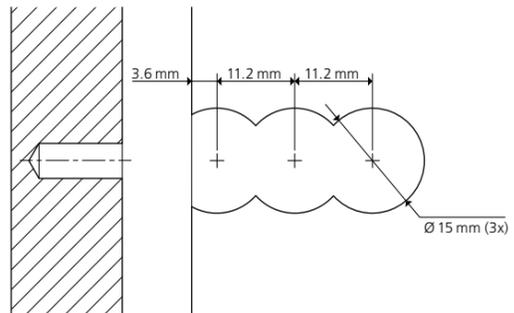


Cutter Ø 10 mm

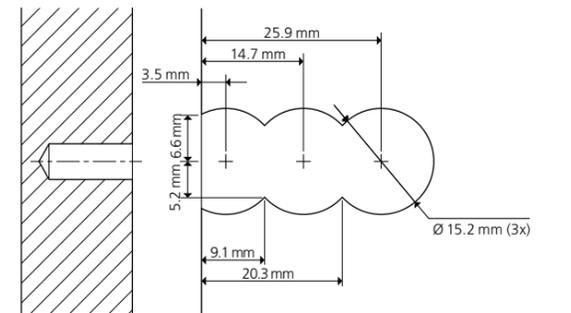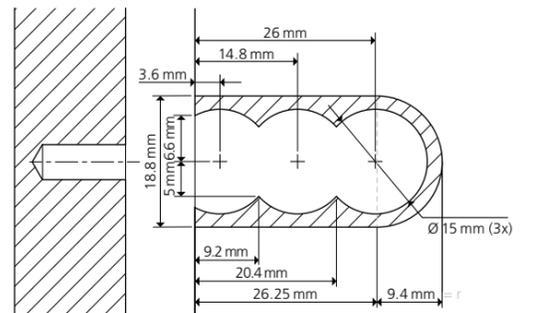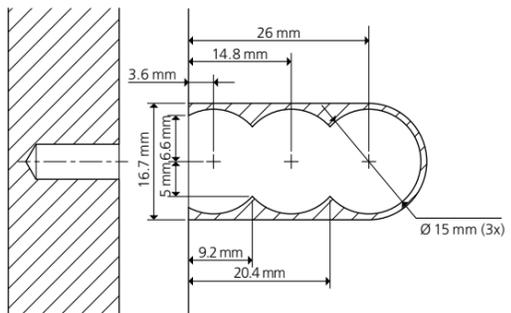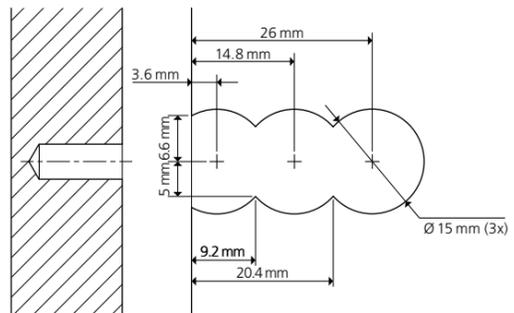

Cutter Ø 12 mm

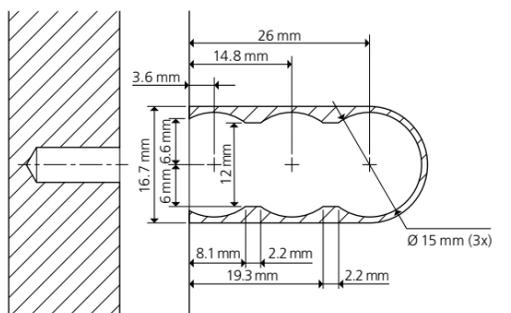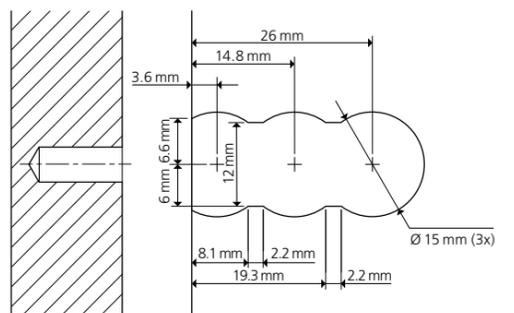

Machining Cabineo Insert




	X	Y = Ø
	[mm]	[mm]
Cabineo 8 M6*	8	5
Cabineo insert M6 × 12.3	13.5	8
Cabineo insert M6 × 15.3	16.5	8

* Metric ISO thread DIN 13-1


Technical information

Machining Invis Mx2


Invis Mx2 stud 30 mm

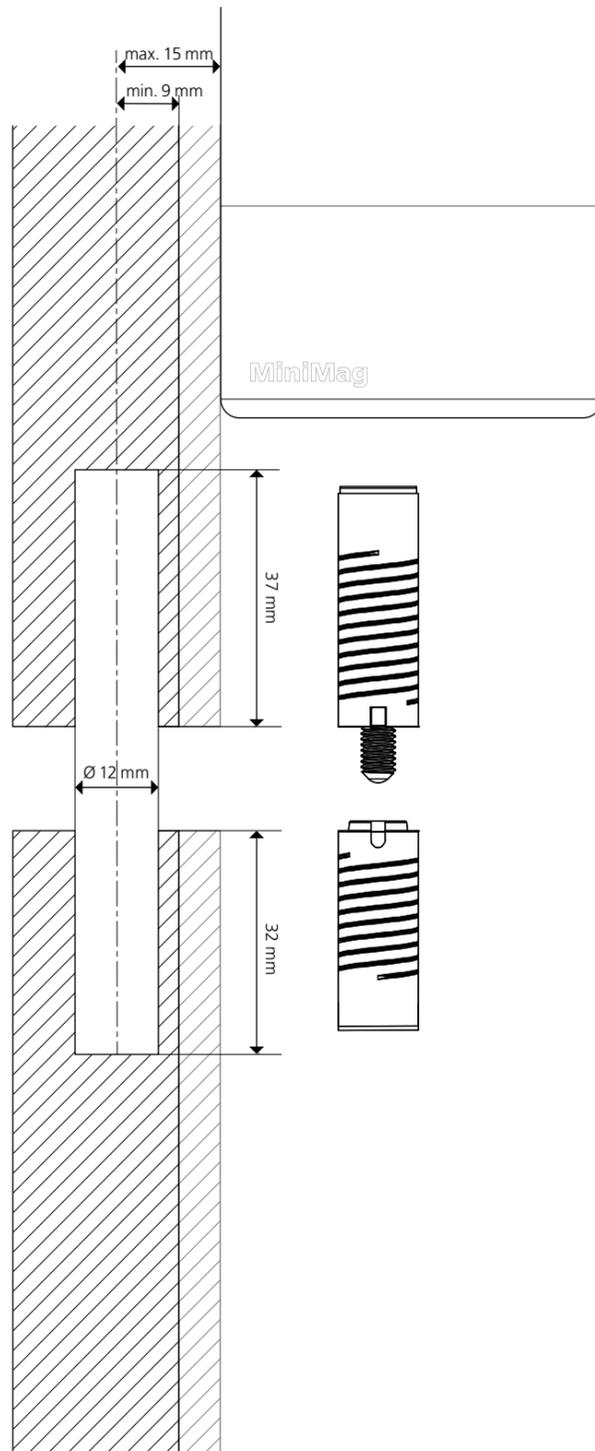

Invis Mx2 stud 14 mm

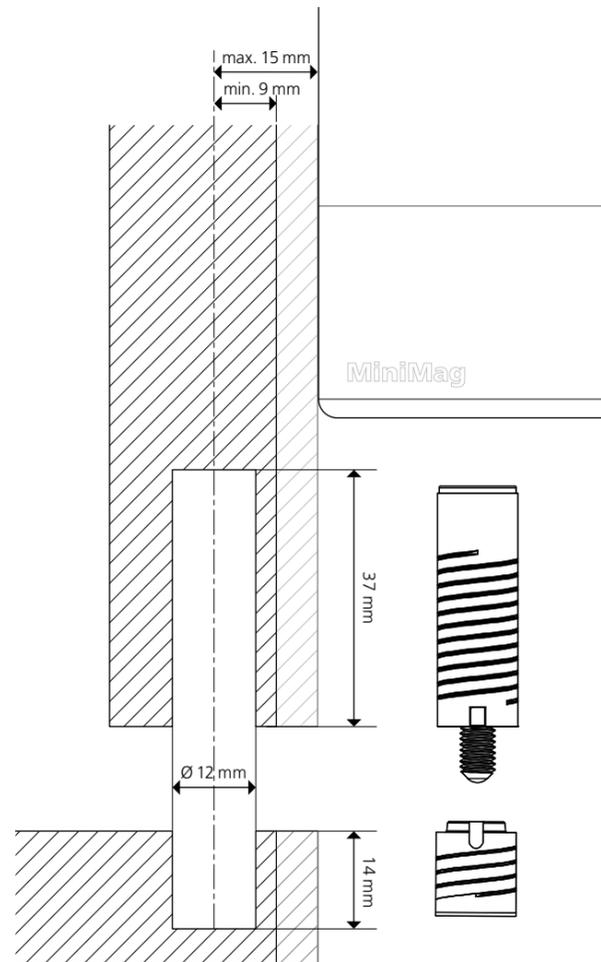

Invis Mx2 centre wall stud 14–30 mm

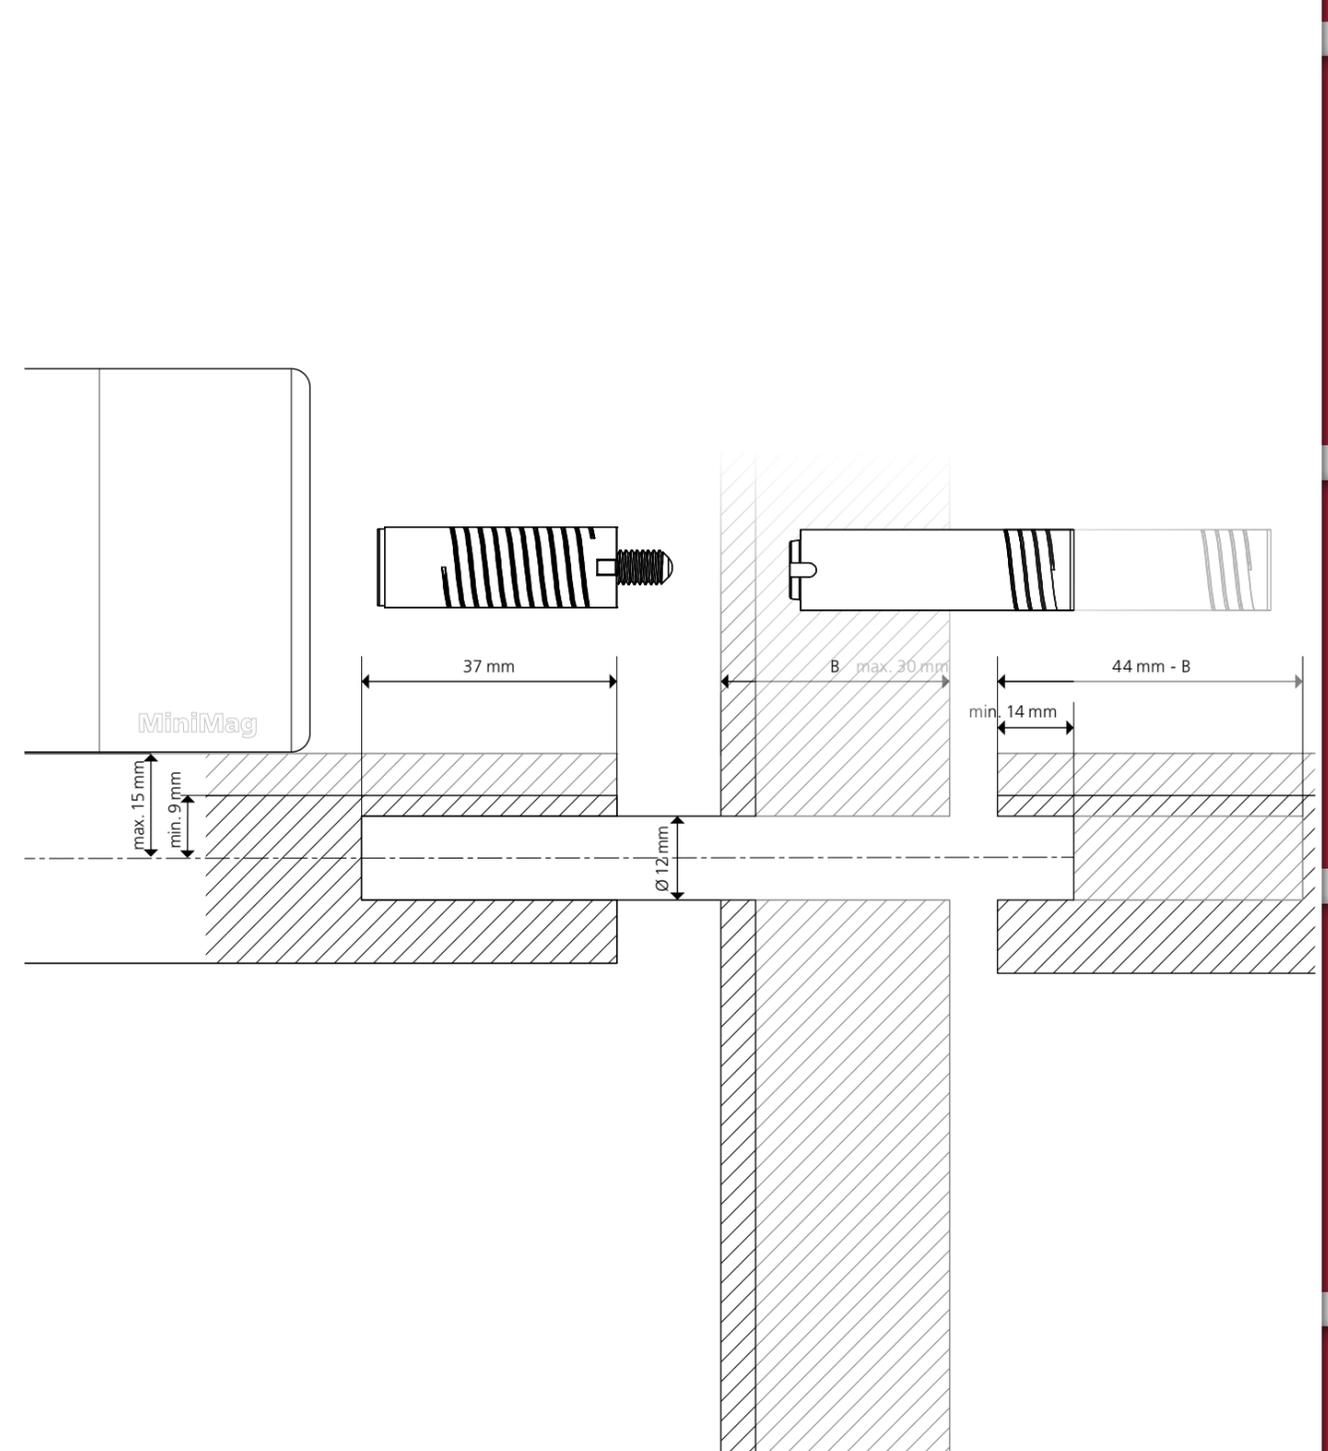

Strong partnerships

For efficient production with CNC technology

CAD/ERP/CAM software



CNC machines/Aggregates/CNC tools



Networked production

- Extensive network of planning and processing partners
- Efficient integration of Lamello products into production
- Continuous productivity in planning, processing and installation

A man with short brown hair, wearing a grey zip-up jacket over a light-colored t-shirt, is smiling and holding a large white panel. The panel has a grid of small holes and several larger circular cutouts. He is standing in a workshop or factory setting, with various pieces of wood and machinery visible in the background. The lighting is bright and even.

*« If you want to modernise as a
carpentry company, there is no way
around the Cabineo in my view. »*

Wolfgang Füreder, Managing Director of Holzvision Füreder, Austria

P-System with CNC

Joining methods and requirements for
CNC machines/machining options



CNC machines		With consoles/ vertical or horizontal				With nesting technology						
Number of axes		3				4	5	3		5		
			Machining option	Machining option				Machining option		Machining option		
Joining methods	Machining											
	Access drill hole											
	Profile groove in the edge											
	Profile groove on the surface (close to the edge)											
	Profile groove on the surface (centre of the surface)*											
	Access drill hole 45°											
	Profile groove in the edge 45°											
	Access drill hole 22 – 108°											
	Profile groove in the edge 22 – 108°											

* The Divario P-18 can also be used as an alternative connecting element in the middle of the surface. (2 x 8 mm holes without profile groove)

¹ Without a C-axis, the angle unit cannot be rotated by 90°/180°. Alternatively, the workpiece could be rotated and work in two steps.

The information concerns technical options regarding how the applications could be implemented.

These must be adapted to your company facilities and coordinated with the planning and machining partners.





Detailed information on machining	Detailed information on machining	Possible setup of aggregates and tools	Comments
			Integrated CNC Z-axis with drill (5/6 mm) or with collet chuck for clamping Ø 10 mm and drill 131556 P-System CNC drill bit on PAGE 166
			Saw blade clamp Ø 40/DTK 52 mm and cutter 132143 or with collet chuck and cutter arbor You can find dimensions for cutters and clamping Ø and lengths of cutter arbors on PAGE 166/167
			Angle aggregate – One to four spindle angle aggregates – Floating trimming unit for P-System – Corner notching aggregate – Aggregate for door locks A unit overview can be found on the Lamello website: www.lamello.com under planning and machining partners
			Manually adjustable swivelling aggregates Information: Several tool changes required for angle cuts, drilling and P-System grooves Note: The cutting depth in the centre of the surface may be restricted depending on the model. Tip: For a mitre, the drill hole could be made with the manual drill
			Automatically adjustable swivelling aggregates with automatic tool changer (FLEX5+C/5-MOTION PLUS/Flex5+C, from year of manufacture 2015) – Tool holder WFC 40-25 clamping Ø 10 mm for drill – Drill shank Ø 10 mm, tool protrusion max. 50 mm – Tool holder WFC 40-25 with flange and cutter 132143 Note: In the centre of the surface, the profile groove depth is limited to 10 mm
			Shrink chuck for clamping Ø 12 x 40 mm and shank tool 131342 or collet chuck for clamping Ø 12 x 40 mm and shank tool 131342 P-System CNC shank tool cutter on PAGE 167.

* More information on **PAGES 166–167**

The information concerns technical options regarding how the applications could be implemented. These must be adapted to your company facilities and coordinated with the planning and machining partners.


Possible combination of CNC machines with Zeta P2

More regarding the machining on **PAGE 163**

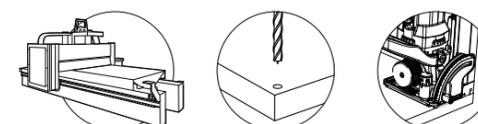

P-System equipment options

For CNC machines for particularly efficient machining

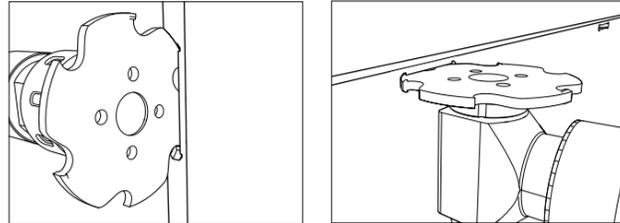

Vertical and horizontal CNC machining centres «CNC compact class»



**EVOLUTION 7405
Connect**

1 · 2 · 3



Brema Eko 2.1
1x aggregate
2x P-System CNC
groove cutters
1x P-System CNC cutter arbor
1x drill Ø 6 mm

1 · 2 · 3



Brema Eko 2.2
1x aggregate for 90°
1x aggregate 45° for 2x 45°
2x P-System CNC
groove cutters
1x P-System CNC cutter arbor
1x drill Ø 6 mm

1 · 2 · 3 · 4



Project TF 100/TF 100 2.0
1x aggregate
2x P-System CNC
groove cutters
1x P-System CNC cutter arbor
1x drill Ø 6 mm

1 · 2 · 3



cx 220
1x aggregate
2x P-System CNC
groove cutters
1x P-System CNC cutter arbor
1x drill Ø 6 mm

1 · 2 · 3





DYNESTIC 7535
1x P-System tool set

1 · 2 · 3 · 4



Vitap K2 2.0
1x aggregate
2x P-System CNC
groove cutters
1x P-System CNC cutter arbor
1x drill Ø 6 mm

1 · 2 · 3



Creator 950
1x P-System CNC
groove cutter in HSK63F
1x P-System CNC shank tool
cutter* in HSK63F
1x drill Ø 6 mm

*optional for P-System CNC
shank tool cutter:
1x aggregate for 90°
1x P-System CNC groove cutter

1 · 2 · 3



**ProTec + P-System
add-on package**
Editor with
Lamello P-System macro
1x P-System CNC
groove cutter in HSK63F
1x P-System CNC cutter arbor
1x P-System CNC shank tool
cutter
1x drill Ø 6 mm

1 · 2 · 3



DRILLTEQ V-200
woodWOP «Lamello P-System»
component
1x P-System tool set

1 · 2 · 3



DRILLTEQ V-310
for 180° + 90° joints:
woodWOP component
«Lamello P-System»
1x P-System tool set

additionally for
45° joints:
2x aggregate 45°
1x tool set for 45°

1 · 2 · 3 · 4



DRILLTEQ D-510
woodWOP «Lamello P-System»
component
1x P-System tool set

1 · 2



cx 110
1x aggregate
2x P-System CNC
groove cutters
1x P-System CNC cutter arbor
1x drill Ø 6 mm

1 · 2 · 3

www.lamello.com Experience CNC live and receive comprehensive product information!




Connectivity

Surface 180°	Corner 90°	Centre wall 90°	Mitre 2x 45°
1	2	3	4

Ideas for standardising

The machining on a CNC machine

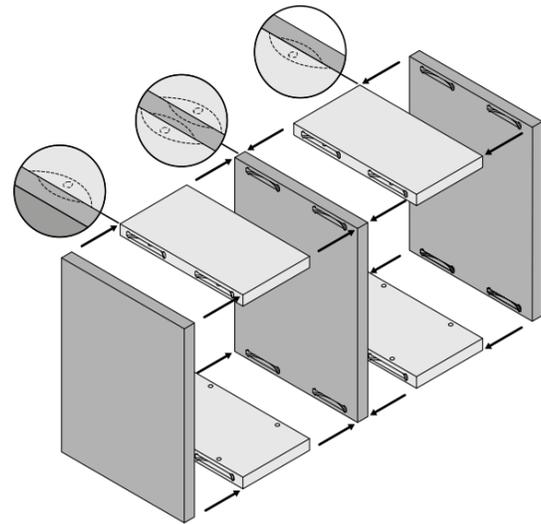

Clamex P-14 CNC with lever, Clamex P-14 with lever and Clamex P-14/10 Flexus with lever are compatible with all Clamex P elements without lever.
This allows for a standardised construction method.

Depth 14 mm for all P-System grooves
in the panel edge (with the access hole)



Art. No.

Clamex P-14 CNC element with lever, 2000 pieces **145388**



Clamex P-14 element with lever, 2000 pieces **145388**



Clamex P-14 Flexus element with lever, 2000 pieces **145318**

Depth 10 mm for all P-System grooves
in the surface



Art. No.

Clamex P-10 element without lever, 2000 pieces **145358**






Clamex P-10 Medius element without lever, 2000 pieces **145369**

Possible combination of CNC machines with Zeta P2

Precise drilling on a CNC machine; use these drill holes to position the Zeta P2 to cut the P-System grooves.
This application is especially ideal if the CNC machine is a nesting machine and or no aggregate is available.
This method combines the precision and efficiency of a CNC machine and uses the simple and fast machining of a P-System groove with a Zeta P2.

Positioning drill holes for the Zeta P2



Art. No.

Zeta P2 positioning pin CNC, Ø 5 mm, 2 pieces **251048**


Art. No.

Zeta P2 positioning clip CNC, for drill hole Ø 6 mm **251067**

Art. No.


Zeta P2 positioning pin CNC, Ø 8 mm, 2 pieces **251066**

Machining steps

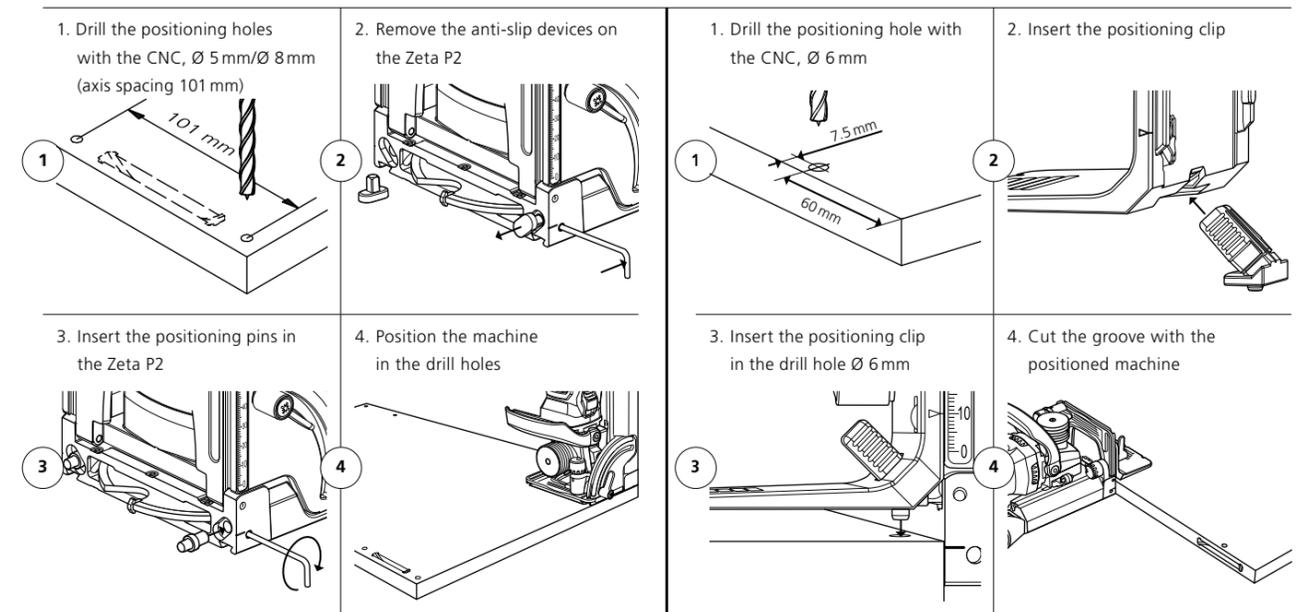

Cabineo with CNC

Specific equipment options for CNC machines for Cabineo





CNC machine

Homag CENTATEQ N-600


Homag has developed the unmanned installation of the Cabineo connector on its nesting CNC machine CENTATEQ N-600. First, the multi spindle aggregate from Benz creates the drill shape, consisting of 3 drill holes, in one plunge. Once the panels are cut to size, the machine will commence with the fully automated insertion of the Cabineo into the board.

Gannomat Basica Variabel 0194


First, the 3 spindle aggregate drills the 15 mm drill holes in one plunge. Following this, the Cabineo is held by an insertion aggregate and is pressed into the board. The 5 mm holes for the Cabineo screw are drilled either with the boss hinge aggregate or the 11 spindle shelf pin aggregate.

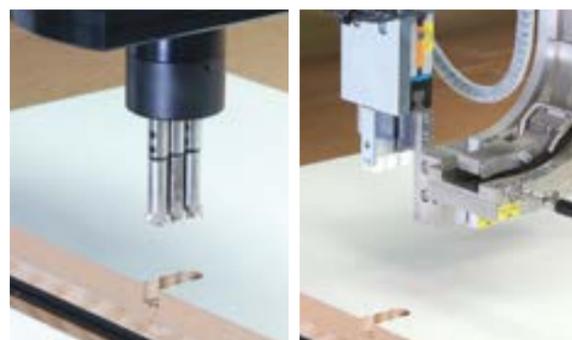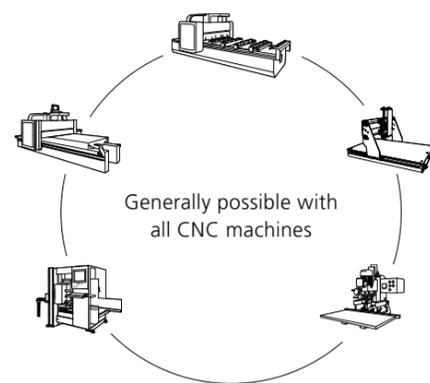

www.lamello.com



Experience CNC live and receive comprehensive product information!



CNC tools - aggregate

Benz was the first company to develop a triple multi-spindle head in order to drill the Cabineo with a single stroke. This reduces the machining time to approx. 1-2 seconds.

Supplier of triple drilling unit for Cabineo:

Benz MULTI V3 CABINEO


Vertical multi-spindle head (direction of rotation of the drills 1 piece left hand rotation, 2 pieces right hand rotation)

Atemag VERTINEO FUNCTION LINE

Drilling unit for Cabineo connector All-In-One. (Direction of rotation of the drills 2 pieces left hand rotation, 1 piece right hand rotation)

Grotefeld DPL-03-03-CABINEO

Multi-spindle drilling unit DPL (Direction of rotation of the drills, both options possible: 1 drill left hand rotation, 2 drills right hand rotation or 2 drills left hand rotation, 1 drill right hand rotation)



CNC tools

Leuco was the first company to develop the interlocking drills for the triple multi-spindle units.

Leuco drills for triple drilling units*

Solid carbide (VHW), special LEUCO cutting edge and pre-cutter geometry for minimum cutting force and cutting pressure.

Leitz drill bits for triple drilling units

Solid carbide, round pre-cutter geometry for very good drill edge quality, extremely wear-resistant carbide grade.

* Cabineo drills for aggregate see **PAGE 168**



CNC tools

For the P-System




P-System CNC tools

	Art. No.
	
Clamex CNC drill bit, HW (carbide), Ø 6 mm, shaft Ø 10 x 65 mm, L 100 mm	131556
	
P-System groove cutter CNC, DP (diamond), Ø 100.4 x 7 x Ø 30 mm, Z3, NL 4 x Ø 6.6 x Ø 48 mm	132142
P-System groove cutter CNC, DP, left hand, Ø 100.4 x 7 x Ø 30 mm, Z3, NL 4 x Ø 6.6 x Ø 48 mm, for Weeke BHX 200, Homag DRILLTEQ V-500, DRILLTEQ V-310, ...	132149
	
P-System groove cutter CNC, DP (diamond), Ø 100.4 x 7 x Ø 30 mm, Z6, NL 4 x Ø 6.6 x Ø 48 mm, for Lamello CNC milling arbor with 30 mm hub	132145
	
P-System groove cutter CNC, DP (diamond), Ø 100.4 x 7 x Ø 40 mm, Z3, NL 4 x Ø 5.5 x Ø 52 mm, e.g. Benz FLEX5+C, Benz 5-MOTION PLUS, ...	132143
	
P-System groove cutter CNC, DP (diamond), Ø 100.4 x 7 x Ø 16 mm, Z3, NL 4 x Ø 5.5 x Ø 28 mm, for corner notching unit, ...	132144
	
P-System groove cutter CNC, DP (diamond), Ø 100.4 x 7 x Ø 35 mm, Z3, NL 4 x Ø 5.5 x Ø 50 mm, for Brema Eko 2.1, Masterwood project TF 100, Format4 D-Jet, Morbidelli cx110 / cx220, ...	132148
P-System groove cutter CNC, DP, rotation left, Ø 100.4 x 7 x Ø 35 mm, Z3, NL 4 x Ø 5.5 x Ø 50 mm, for Format4 Nesting profit H08, ...	132180

	Art. No.
	
Cutter arbor CNC for P-System groove cutter, Ø 30 mm, S Ø 20 x 50 mm, L 102 mm, NL 4 x M4 x Ø 48 mm	132150
	
Cutter arbor CNC for P-System groove cutter, Ø 30 mm, S Ø 25 x 60 mm, L 102 mm, NL 4 x M4 x Ø 48 mm	132151
	
Cutter arbor CNC for P-System groove cutter, Ø 30 mm, S Ø 16 x 50 mm, L 85 mm, NL 4 x M4 x Ø 48 mm	132152
	
Cutter arbor CNC for P-System groove cutter, Ø 30 mm, S Ø 16 x 55 mm, L 68 mm, NL 4 x M4 x Ø 48 mm	132153
	
Cutter arbor CNC P-System cutter, clamping surf. 2, Ø 30 mm, S Ø 16 x 50 mm, L 85 mm, NL 4 x M4 x Ø 48 mm, for lock case unit	132154
	
Cutter arbor CNC P-System cutter, clamping surf. 2, Ø 30 mm, S Ø 20 x 50 mm, L 85 mm, NL 4 x M4 x Ø 48 mm, for lock case unit	132155
Countersunk screw, Torx, 4 pieces, M6 x 16 mm, T20, for CNC cutter arbor	132159
Screwdriver with cross-grip, Torx T20 x 100 mm, green	271919
	
Cutter arbor CNC for 4 mm Lamello groove cutter, Ø 22 mm, shaft Ø 16 x 36 mm, L 80 mm, NL 4 x M4 x Ø 36 mm	132156

	Art. No.
	
P-System shaft tool cutter, HW solid (carbide), Ø 7.05/9.8 mm, S Ø 12 x 40 mm, L 80 mm	131342

One tool with 2 functions

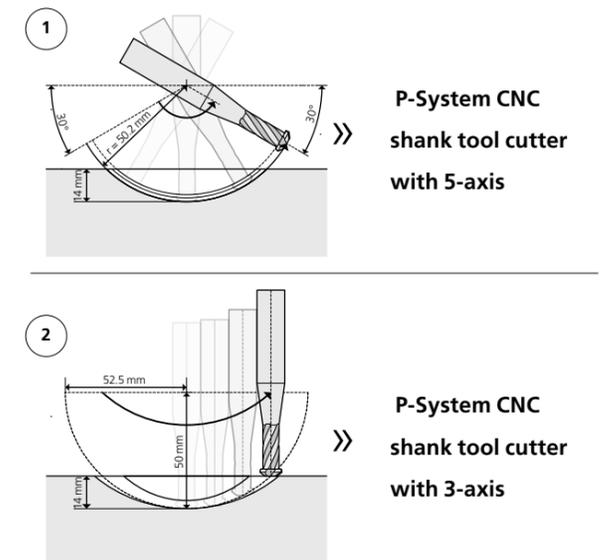

Lamello recommends making all profile grooves with a disc cutter, primarily for reasons of precision, service life, machining time and thus economic efficiency.

A P-System CNC shank tool cutter or contour cutter should only be used for the machining of surfaces if no angle aggregate is available.

CNC tools

For Cabineo



Drilling System

Cabineo drill/cutter

	Art. No.
Cabineo drill, HW, Ø 15 mm	136312

	Art. No.
Cabineo cutter DP, Ø 10 mm	136310

	Art. No.
Cabineo cutter DP, Ø 12 mm	136311

Cabineo drills for triple aggregate*

	Art. No.
Cabineo aggregate drill, HW, rotation right, Ø 15 mm, shank Ø 6/4.5 x 18 mm, L 57.5 mm	136314

	Art. No.
Cabineo aggregate drill, HW, rotation left, Ø 15 mm, shank Ø 6/4.5 x 18 mm, L 57.5 mm	136315

« *Lamello is an asset to us
because it allows us to
expand our possibilities.* »

Andreas Kuhlmann, Managing Director,
Adolf Kuhlmann GmbH & Co. KG furnishing workshops,
Schwerin, Germany



Accessories/ Spare Parts

P-System connector assortment



	Art. No.
P-System connector assortment professional, in sortainer Kit contains: 120 pairs Clamex P-14, 30 pairs Clamex P-14/10 Flexus, 30 pairs Clamex P-10, 30 pairs Tenso P-10, incl. preload clip, 120 pairs Tenso P-14, incl. preload clip, 80 pairs Divario P-18, 20 pieces Bisco P-14, 20 pieces Bisco P-10, incl. Divario installation tool/drill/marking gauge, Clamex P installation tool, Tenso P-14/10 preload tool	145323
P-System connector assortment basic, in Systainer ³ M Kit contains: 80 pairs Clamex P-14, 80 pairs Tenso P-14, incl. preload clip, 30 pairs Clamex P-14/10 Medius, 30 pairs Clamex P-14/10 Flexus, 20 pairs Bisco P-14	145321

Starter kit



Divario P-18 Starter kit, in Systainer ³ M 137 Kit contains: 80 pairs Divario P-18, Divario installation tool, marking jig metal	145552
--	---------------

Lamello Systainer³



	Art. No.
Systainer ³ M 187, with insert and 6 partitions	331579E
Systainer ³ M 187	257140
Systainer ³ M 187 Insert 2 partitions, incl. foam insert, RAL 7035 light grey	360024
Divider insert, light grey, 125 x 117 x 2 mm	257151
Systainer ³ M 187 plastic insert, for Zeta P2, Top 21, Classic X	257152


Lamello sortainer



Sortainer T-Loc IV/3, incl. dividers + boxes	257142
--	---------------


Accessories/ Spare Parts

Clamex P



Clamex cover cap 90°

	Art. No.
Clamex cover cap, 100 pieces, RAL 9010 pure white	335280
Clamex cover cap, 100 pieces, RAL 9011 graphite black	335281
Clamex cover cap, 100 pieces, RAL 1014 ivory, pine	335282
Clamex cover cap, 100 pieces, RAL 1011 brown beige, beech	335283
Clamex cover cap, 100 pieces, RAL 8007 fawn brown	335284
Clamex cover cap, 100 pieces, RAL 8017 chocolate brown	335289
Clamex cover cap, 100 pieces, RAL 9002 grey white	335285
Clamex cover cap, 100 pieces, RAL 7035 light grey	335286
Clamex cover cap, 100 pieces, RAL 7040 window grey	335287
Clamex cover cap, 100 pieces, RAL 7031 blue grey	335288
Clamex cover cap, 100 pieces, RAL 7022 umbra grey	335298
Clamex cover cap, 500 pieces, RAL 9010 pure white	335362
Clamex cover cap, 500 pieces, RAL 9011 graphite black	335363
Clamex cover cap, 500 pieces, RAL 1014 ivory, pine	335364
Clamex cover cap, 500 pieces, RAL 1011, brown beige, beech	335365
Clamex cover cap, 5000 pieces, RAL 9010 pure white	335296
Clamex cover cap, 5000 pieces RAL 9011 graphite black	335291
Clamex cover cap, 5000 pieces, RAL 1014 ivory, pine	335292
Clamex cover cap, 5000 pieces, RAL 1011 brown beige, beech	335293
Clamex cover cap, 5000 pieces, RAL 8007 fawn brown	335294
Clamex cover cap, 5000 pieces, RAL 8017 chocolate brown	335299
Clamex cover cap, 5000 pieces, RAL 9002 grey white	335295
Clamex cover cap, 5000 pieces, RAL 7040 window grey	335297



Clamex cover cap 45°

	Art. No.
Clamex cover cap 45°, 100 pieces, RAL 9010 pure white	335380
Clamex cover cap 45°, 100 pieces, RAL 9011 graphite black	335381
Clamex cover cap 45°, 100 pieces, RAL 1014 ivory, pine	335382
Clamex cover cap 45°, 100 pieces, RAL 1011 brown beige, beech	335383
Clamex cover cap 45°, 100 pieces, RAL 8017 chocolate brown	335384
Clamex cover cap 45°, 100 pieces, RAL 7035 light grey	335386
Clamex cover cap 45°, 100 piece, RAL 7022 umbra grey	335388
Clamex cover cap 45°, 5000 pieces, RAL 9010 pure white	335390
Clamex cover caps 45°, 5000 pieces, RAL 1014 ivory, pine	335392
Clamex cover caps 45°, 5000 pieces, RAL 1011 Beech	335393



Clamex installation tool, flexible, hexagon head key, L 290 **251993**



Allen key, SW 4 mm, 75 x 55 mm **271945**

Allen key, SW 4 mm, 120 x 50 mm **271945A**



Clamex P drill jig with drill Ø 6 mm **125344**

Clamex P drill jig, angle with bushing, for Art. No. 125344 **255250**

Clamex P drill jig, element insert P-10, for Art. No. 125344 **255251**

Clamex P drill jig, element insert P-14, for Art. No. 125344 **255252**



Clamex P drill jig long, incl. drill Ø 6 mm, for P-14 groove **125345**

Clamex wood drill, Ø 6 mm **131506**

Wood drill with centre point for Ø 6 drilling jig, Length 150 mm **131508EK**

Clamex depth collar, Ø 6 mm, incl. allen key **255243**

Accessories/ Spare Parts

Clamex S-18/Clamex S-20

	Art. No.
 Clamex S-18 drill jig, incl. drill Ø 6 mm	125240
 Clamex S-18 Set, incl. drill jig, reversible blades Kit contains: 125240 Clamex S drill jig, 132108 reversible blades for Clamex S, HW (carbide)	125250
 Clamex S-20 drill jig, incl. drill Ø 6 mm	125253
 Clamex S-20 Drilling and alignment jig	125254
 Torx-Bit 1/4" TX 10 L=25	121281
 Clamex wood drill, Ø 6 mm	131506
 Clamex installation tool, flexible, hexagon head key, L 290	251993

Tenso P

 Tenso P-14/10 insertion tool	145400
 P-System depth adjuster cap 4 mm for P-8	145439

Divario P


	Art. No.
 Divario P-18 marking jig metal, incl. drill and rotating depth stop	125510
 Divario P-18 marking jig plastic	125511
 Divario P-18 installation tool	125500
 Divario P-18 Starter set Scope of delivery: 80 pair Divario P-18, Divario installation tool, marking jig plastic	145550S

LC P-16


 P-System depth adjuster cap 2 mm for P-16	251068
 Clamex P drill jig, element insert P-16, suitable for Art. No. 125344 for LC P-16	255255
 Zeta P2 positioning clip CNC, for drill hole Ø 6 mm	251067

Accessories/ Spare Parts

Cabineo

	Art. No.
	Cabineo installation tool, with handle incl. hex bit 1/4" 256300
	Cabineo hex bit 1/4" GL 120 mm 276312
	Cabineo hex bit 1/4" GL 80 mm 276308
	Cabineo hex bit 1/4" GL 80 mm, 100 pieces 276309
	Cabineo drill, HW, Ø 15 mm 136312
	Cabineo cutter DP, Ø 10 mm 136310
	Cabineo cutter DP, Ø 12 mm 136311
	Cabineo aggregate drill*, HW, rotation right, Ø 15 mm, shank Ø 6/4.5 x 18 mm, L 57.5 mm 136314
	Cabineo aggregate drill*, HW, rotation left, Ø 15 mm, shank Ø 6/4.5 x 18 mm, L 57.5 mm 136315
	Cabineo cover cap, 100 pieces, RAL 9003 signal white ○ 186350S
	Cabineo cover cap, 100 pieces, RAL 9010 pure white ○ 186350W
	Cabineo cover cap, 100 pieces, RAL 9018 papyrus white ● 186350P
	Cabineo cover cap, 100 pieces, RAL 1015 light ivory ● 186350H
	Cabineo cover cap, 100 pieces, RAL 1011 brown beige ● 186350B
	Cabineo cover cap, 100 pieces, RAL 8007 fawn brown ● 186350R
	Cabineo cover cap, 100 pieces, RAL 7040 window grey ● 186350F
	Cabineo cover cap, 100 pieces, RAL 7005 mouse grey ● 186350A
	Cabineo cover cap, 100 pieces, RAL 9005 jet black ● 186350T
	Cabineo cover cap, 100 pieces, Metal look, silver ● 186350C
	Cabineo cover cap, 100 pieces, Metal look, nickel ● 186350N
	Cabineo cover cap, 100 pieces, Metal look, dark steel ● 186350D

* For triple drilling units: Benz MULTI V3 Cabineo, Atemag VERTINEO FUNCTION LINE, Grotefeld DPL-03-03-Cabineo, ...

	Art. No.
	Cabineo cover cap, 2000 pieces, RAL 9003 signal white ○ 186351S
	Cabineo cover cap, 2000 pieces, RAL 9010 pure white ○ 186351W
	Cabineo cover cap, 2000 pieces, RAL 9018 papyrus white ● 186351P
	Cabineo cover cap, 2000 pieces, RAL 1015 light ivory ● 186351H
	Cabineo cover cap, 2000 pieces, RAL 1011 brown beige ● 186351B
	Cabineo cover cap, 2000 pieces, RAL 8007 fawn brown ● 186351R
	Cabineo cover cap, 2000 pieces, RAL 7040 window grey ● 186351F
	Cabineo cover cap, 2000 pieces, RAL 7005 mouse grey ● 186351A
	Cabineo cover cap, 2000 pieces, RAL 9005 jet black ● 186351T
	Cabineo cover cap, 2000 pieces, Metal look, silver ● 186351C
	Cabineo cover cap, 2000 pieces, Metal look, nickel ● 186351N
	Cabineo cover cap, 2000 pieces, Metal look, dark steel ● 186351D
	Cabineo installation tool for insert M6 276310

Cabineo X

	Cabineo 12 screw, 500 pieces 186380
	Cabineo 12 screw, 2000 pieces 186381
	Cabineo 8 screw, 500 pieces 186382
	Cabineo 8 M6 screw, 500 pieces 186384
	Cabineo X shelf support Ø 5, 500 pieces 186386
	Cabineo X shelf support Ø 3, 500 pieces 186388
	Cabineo X screw-in aid, suitable for Cabineo hexagon bit 1/4" GL 80 mm 276313

Accessories/ Spare Parts

Invis Mx2

	Art. No.
	Invis Mx2 screw bit 6112205
	Invis Mx2 MiniMag, incl. screw bit 6100301
	Invis M2 MiniMag flexible shaft 6100204
	Invis Mx2 insertion tool, for 14mm stud 6112333
	Invis Mx2 insertion bush for Rasto, for 14mm stud 6112330

Rasto

	Art. No.
	Rasto spiral drill for wood, Ø 5 mm 6100160
	Rasto spiral drill for wood, Ø 6 mm 6106161
	Rasto spiral drill for wood, Ø 8 mm 6108060
	Rasto spiral drill for wood, Ø 10 mm 6110162
	Rasto spiral drill for wood, Ø 12 mm 6112060
	Rasto depth set collar, Ø 5 mm 6100059
	Rasto depth set collar, Ø 6 mm 6100063
	Rasto depth set collar, Ø 8 mm 6100060
	Rasto depth set collar, Ø 10 mm 6100064
	Rasto depth set collar, Ø 12 mm 6100061
	Invis Mx2 spacer for Rasto 6112331
	Rasto perforated plate 6160000
	Rasto drill bush, Ø 5 mm 6100065
	Rasto drill bush, Ø 6 mm 6100056
	Rasto drill bush, Ø 8 mm 6100057
	Rasto drill bush, Ø 10 mm 6100067
	Rasto drill bush, Ø 12 mm 6100058
	Rasto fixing screw, 4.5 x 35 mm, TX25 6560450
	Rasto positioning pins, Ø 5 x 40 mm 6160001
	Rasto connection rod, 500mm, two-part 6160601

Accessories/ Spare Parts

Zeta P2, Classic X, Top 21



	Art. No.
Stop square, for Zeta P2, Top 21, Classic X	251044



Spacer 5 mm, aluminium, for Zeta P2, Top 21, Classic X	253027
--	---------------



Spacer 2 mm, plastic, for Zeta P2, Top 21, Classic X	253023
--	---------------



Spacer 4 mm, plastic, for Zeta P2, Top 21, Classic X	253026
--	---------------



	Art. No.
Groove cutter, HW, Ø 100×4×Ø 22 mm, Z2+V4, NL 4	132000



Groove cutter for biscuit joiners, HW, Ø 78×3×Ø 22 mm, Z4, NL 4	132009
---	---------------



Saw blade for biscuit joiners, HW, Ø 100×2.4×Ø 22 mm, Z20, NL 4, incl spacers	132350
---	---------------



Groove cutter with reversible blades, HW, Ø 100×4×Ø 22 mm, Z4, NL 4	132001
---	---------------

Reversible blades set for 4 mm groove cutter, 4 pieces, suitable for item no. 132101/132001	132111
---	---------------

Countersunk screw, M4×8 mm	352408T
----------------------------	----------------

Allen key, SW4 mm, 144×29 mm	271959L
------------------------------	----------------



Groove cutter HW with reversible blades, Ø 100×4×Ø 22 mm, Z4+V4, WS, NL 4, without hub	132130
--	---------------

Kit contains: Groove cutter, HW, Torx key T9, 4×screws, spacer

Main teeth for groove cutter with rev. blades 4 mm, 10 pieces, for Art. No. 132130	132134
--	---------------

Scoring teeth for groove cutter with rev. blades, 10 pieces, for Art. No. 132130	132135
--	---------------

Reversible blades set for 4 mm groove cutter, 4 pieces, suitable for item no. 132130	132133
--	---------------

Screw, for groove cutter with rev. blades Art. No. 132130	352130
---	---------------

Torx key, for groove cutter rev. blades Art. No. 132130, TX9	352133
--	---------------



Groove cutter with reversible blades, for biscuit joiner, HW, Ø 100×8×Ø 22 mm, Z4+V4, NL 4, WS, for Clamex S-18	132108
---	---------------

Scoring teeth for groove cutter with rev. blades 8 mm, 10 pieces for Art. No. 132108	132137
--	---------------

Main teeth for groove cutter with rev. blades 8 mm, 10 pieces for Art. No. 132108	132136
---	---------------

Reversible blades for 8 mm groove cutter, 4 pieces, suitable for item no. 132108	132114
--	---------------

Accessories/ Spare Parts

Zeta P2, Classic X, Top 21



Spacer disk, Ø 40 × 1 × Ø 22 mm, NL 4

Art. No.

322510



Flange to saw blades, incl. screws, Ø 45 × 5.5 mm, M8, NL 4

252502

Classic X



Groove cutter HW for Classic X, Ø 100 × 4 × Ø 22 mm, Z6 alternating teeth

132106

Zeta P2 cordless and Zeta P2



Zeta P2, P-System groove cutter, DP (Diamond), Ø 100.4 × 7 × Ø 22 mm, Z3, NL 4

Art. No.

132140



Zeta P2, P-System groove cutter, HW, Ø 100.9 × 7 × Ø 22 mm, Z3, NL 4

132141

Combination CNC and Zeta P2



Zeta P2 positioning pin CNC*, Ø 5 mm, 2 pieces

251048

Zeta P2 positioning pin CNC*, Ø 8 mm, 2 pieces

251066



Zeta P2 positioning clip CNC*, for drill hole Ø 6 mm

251067

Accessories/ Spare Parts

Dust bag and accessories



	Art. No.
Dust bag, for Zeta P2, Top 21, Classic X	257532



Extractor stub 36 mm, for Zeta P2, Top 21, Classic X	331007
--	---------------



Deflector stub 90°, Ø 23 mm, for Zeta P2, Top 20/21, Classic X	331005
--	---------------

Battery

CAS



Battery pack 18V, LiHD 4.0 Ah, for Zeta P2 cordless, Classic X cordless	313013
---	---------------



Battery pack 18V, LiHD 5.5 Ah, for Zeta P2 cordless, Classic X cordless	313015
---	---------------



Battery charger ASC 55, plug type C Euro, for Zeta P2 cordless, Classic X cordless	123100DE
--	-----------------

Battery charger ASC 55, plug type G, GB, for Zeta P2 cordless, Classic X cordless	123100GB
---	-----------------

Technical notes

Strength values

Insofar as we provide information on strengths or loads for our products, these are empirical values with regard to the load limits on the basis of specifically defined test conditions in line with DIN 68501:2016-11. This does not guarantee specific characteristics, in particular that the products comply with the specified loads in actual use; rather it is up to the respective users themselves to check and ensure the suitability of the products for the specific use. Since compliance with the specified load limits is essentially dependent on circumstances beyond the products themselves, such as the properties of the support materials used, the assembly or the installation environment, any advice we provide in terms of a product recommendation with regard to a specific suitability for use is always non-binding and does not absolve users from their obligation to conduct their own checks.

Use

Our connectors are designed for indoor use under normal indoor climate conditions. Corrosion can occur in humid, corrosive environments or outdoor applications. Please check the suitability of the products for your specific application. We assume no liability for applications outside the defined use.


Machine overview

	Art. No.	Product page
	Zeta P2 cordless biscuit joiner	
	DP, Set, in systainer, incl. batteries, charger type C Euro	101801DESD P. 64
	DP, in systainer, without batteries without charger	101800DESD P. 64
	DP, Set, in systainer, incl. batteries, charger type G	101801GBSD P. 64
	DP, in systainer, without batteries without charger	101800GBSD P. 64
	Zeta P2 biscuit joiner	
	HW, plug type F Schuko, in Systainer ³ M	101403DES P. 66
	HW, plug type G, in Systainer ³ M	101403GBS P. 66
	DP, plug type F Schuko, in Systainer ³ M	101403DESD P. 66
	DP, plug type G, in Systainer ³ M	101403GBSD P. 66
	Zeta P2 Set	
	DP, plug type F Schuko, in Systainer ³ M incl. connector assortment	101403DESET P. 68
	DP, plug type G, in Systainer ³ M incl. connector assortment	101403GBSET P. 68
	Scope of delivery 1st systainer 1 pce Zeta P2 biscuit joiner, Clamex P drill jig incl. drill, adapter 36 mm, spacer 2 and 4 mm, set of tools, stop square	
	Scope of delivery 2nd systainer: 1 pce Divario P-18 Starter Set in Systainer ³ M Consisting of: 80 pairs Divario P-18, marking jig metal, installation tool, drill	
	Scope of delivery 3rd systainer: 1 pce P-System connector set in Systainer ³ M Consisting of: 80 pairs Clamex P-14, 80 pairs Tenso P-14 incl. preload tool	
	Classic X cordless biscuit joiner	
	Set, in systainer, incl. batteries, charger type C Euro	101701DES P. 106
	In systainer, without batteries without charger	101700DES P. 106
	In carton, without batteries without charger	101700DEK P. 106
	In systainer, incl. batteries, charger plug type G	101701GBS P. 106
	In systainer, without batteries without charger	101700GBS P. 106
	In carton, without batteries without charger	101700GBK P. 106
	Classic X biscuit joiner	
	Plug type F Schuko, in Systainer ³ M	101602DES P. 108
	Plug type F Schuko, in carton	101602DEK P. 108
	Plug type G, in Systainer ³ M	101602GBS P. 108
	Plug type G, in carton	101602GBK P. 108
	Top 21 biscuit joiner	
	Plug type F Schuko, in Systainer ³ M	101501DES P. 110
	Plug type G, in Systainer ³ M	101501GBS P. 110
	Plug type F Schuko, in Systainer ³ M with WS-cutter	101501DESW P. 110

Systainer and sortainer

	Art. No.	Product page
	P-System connector assortment professional	
	In sortainer Kit contains: 120 pairs Clamex P-14, 30 pairs Clamex P-14/10 Flexus, 30 pairs Clamex P-10, 30 pairs Tenso P-10, incl. preload clip, 120 pairs Tenso P-14, incl. preload clip, 80 pairs Divario P-18, 20 pieces Bisco P-14, 20 pieces Bisco P-10, incl. Divario installation tool/drill/marking gauge, Clamex P installation tool, Tenso P-14/10 preload tool	145323 P. 170
	P-System connector assortment basic	
	In Systainer ³ M Kit contains: 80 pairs Clamex P-14, 80 pairs Tenso P-14, incl. preload clip, 30 pairs Clamex P-14/10 Medius, 30 pairs Clamex P-14/10 Flexus, 20 pairs Bisco P-14	145321 P. 170
	Divario P-18 Starter kit	
	In Systainer ³ M Kit contains: 80 pairs Divario P-18, Divario installation tool, marking jig metal	145552 P. 52/170
	Clamex S-20 Starter set	
	In Systainer ³ M 137 Scope of delivery: Clamex S-20, 80 pairs, incl. screws, Clamex S-20 drill jig incl. drill Ø 6 mm, Clamex P Installation tool	145247 P. 94
	Invis Mx2 Starter Set	
	In systainer Kit contains: 20 x Invis Mx2 with stud 14 mm, Invis Mx2 screw bit, Invis Mx2 insertion jig, MiniMag Mx2 inkl. flexible shaft, Rasto perforated plate, positioning bolts, fastening screw, Rasto drill bushings Ø 12 mm drill Ø 12 mm, depth adjuster, spacer	6100302 P. 142
	Rasto Mono Set	
	In systainer incl. accessories Kit contains: Rasto perforated plate, 4 x Rasto drill bushings Ø 5, Ø 8, Ø 10, Ø 12 mm, 3 x wood drill bits Ø 5, Ø 8, Ø 12 mm, with depth adjuster, 3 x Rasto positioning pins, 2 x Rasto fastening screw, Invis Mx2 insertion bush, Invis Mx2 spacer Ø 12 mm	126006 P. 146
	Rasto Duo Set	
	In systainer incl. accessories Kit contains: 2 x Rasto perforated plate, 8 x Rasto drill bushings Ø 5, Ø 8, Ø 10, Ø 12 mm, 3 x drills Ø 5, Ø 8, Ø 12 mm, with depth adjuster, 6 x Rasto positioning pins, 2 x Rasto fastening screw, Rasto connection rod 500 mm two-part, Invis Mx2 insertion bush, Invis Mx2 spacer Ø 12 mm	126007 P. 146
	Systainer³ M 187 With insert and 6 partitions	
	Systainer ³ M 187	331579E P. 171
	Insert 2 partitions, incl. foam insert, RAL 7035 light grey	257140 P. 171
	Divider insert, light grey, 125 x 117 x 2 mm	360024 P. 171
	Plastic insert, for Zeta P2, Top 21, Classic X	257151 P. 171
	Plastic insert, for Zeta P2, Top 21, Classic X	257152 P. 171
	Sortainer	
	T-Loc IW/3, incl. dividers + boxes	257142 P. 171

Overview of connectors

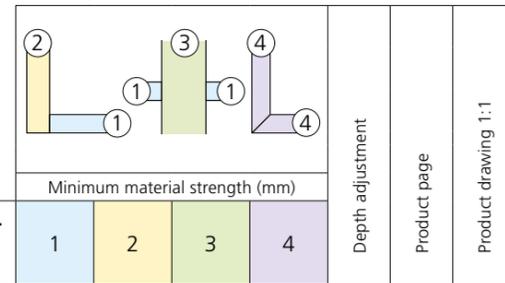


P-System

	Quantity ⊖ Pairs ▽ Pieces	Art. No.	Minimum material strength (mm)				Depth adjustment	Product page	Product drawing 1:1									
			1	2	3	4												
Clamex P Detachable	⊖ 80 300 1000	145334	≥ 12	≥ 15	≥ 29	≥ 18	P14	P. 34	P. 74									
		145346																
		145356																
	▽ 2000	145388								≥ 11	≥ 16	≥ 15	P14/ P10	P. 36	P. 74			
		145370																
		145371																
⊖ 80 300 1000	145372	≥ 16	≥ 19	≥ 18	P10	P. 38	P. 74											
	145373																	
	145374																	
⊖ 80 300 1000	145315							≥ 11	≥ 16	≥ 18	P14/ P10	P. 40	P. 75					
	145316																	
	145317																	
Bisco P Detachable	▽ 80 300 1000	145301	≥ 12	≥ 15 ¹ (≥ 11 ¹)	≥ 21 ¹	≥ 18	P14							P. 46	P. 76			
		145302																
145303																		
▽ 80 300	145304	≥ 11 (≥ 9 ¹)						≥ 17 ¹	≥ 15	P10	P. 46	P. 76						
	145305																	
Tenso P Glueing	⊖ 80 300 1000												145415			≥ 12	≥ 15 (≥ 11 ¹)	≥ 19 ¹
			145425															
145435																		
⊖ 80 300 1000	145418		≥ 11 (≥ 9 ¹)	≥ 16 ¹	≥ 15	P10	P. 50						P. 77					
	145428																	
145438																		
Divario P Sliding insertion	⊖ 80 300 1000	145550						≥ 12	≥ 11	≥ 18	-	P18/0		P. 52	P. 77			
		145560																
145570																		
LC P-16	▽ 80 1000	145710	≥ 16	≥ 12	≥ 19	-	P18 ³						P. 56			P. 78		
		145711																
	▽ 80 1000	145720											≥ 16			≥ 12	≥ 19	-
145721																		
▽ 80 1000	145730	≥ 16						≥ 12	≥ 19	-	P18 ³	P. 56		P. 78				
	145731																	

Lamello System

	Quantity ▽ Pieces	Art. No.	Minimum material strength (mm)				Depth adjustment	Product page	Product drawing 1:1				
			1	2	3	4							
Original wood biscuit Glueing	▽ 1000	144020	≥ 6	≥ 13	≥ 26	≥ 12	20	P. 90	P. 114				
		144010											
		144000											
		144009											
C20/10 Glueing	▽ 250 300	145010	≥ 6	≥ 13	≥ 26	≥ 13	20	P. 100	P. 115				
		145012											
145011	≥ 11	≥ 21								≥ 10	10	P. 100	P. 115
145012													

Minimum material thicknesses depend on the materials used
¹ Offset installation (more information regarding on **PAGE 49/51**)
² Additional use of the clip
³ Additional use of the P-System depth adjuster cap 2 mm for P-16

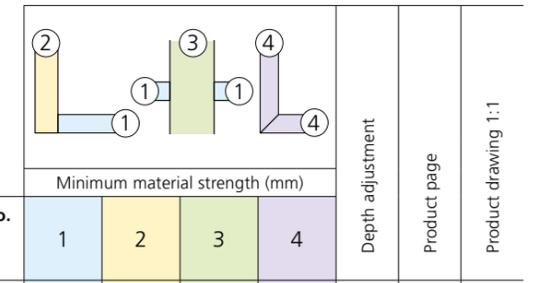

	Quantity ⊖ Pairs ▽ Pieces	Art. No.	Minimum material strength (mm)				Depth adjustment	Product page	Product drawing 1:1
			1	2	3	4			
Clamex S Detachable	⊖ 20 80 300 1000	145243	≥ 8	≥ 16	≥ 32	≥ 14	20	P. 94	P. 116
		145244							
		145245							
E20 Inserted	▽ 80 400 1200	145231	≥ 12	≥ 16	≥ 36	≥ 18	D	P. 96	P. 116
		145236							
		145241							
		145251							
K20 Inserted	▽ 80 400 1200	145021	≥ 8	-	-	≥ 14	S	P. 92	P. 117
		145026							
		145028							
E20-L	▽ 80 400 1200	145022	≥ 8	-	-	≥ 25	20 D max	P. 92	P. 117
		145025							
		145027							
Cabineo Detachable	▽ 500 2000	186320	≥ 12	≥ 13	≥ 24	-	-	P. 128	P. 148
		186321							
Cabineo 12 black	▽ 500 2000	186330	≥ 12	≥ 13	≥ 24	-	-	P. 128	P. 148
		186331							
Cabineo 8	▽ 500 2000	186310	≥ 12	≥ 9	≥ 16	-	-	P. 130	P. 148
		186311							
Cabineo 8 black	▽ 500 2000	186340	≥ 12	≥ 9	≥ 16	-	-	P. 130	P. 148
		186341							
Cabineo 8 M6	▽ 500 2000	186315	≥ 12	≥ 9	≥ 16	-	-	P. 132	P. 148
		186316							
Cabineo 8 M6 black	▽ 500 2000	186345	≥ 12	≥ 9	≥ 16	-	-	P. 132	P. 148
		186346							
Cabineo insert M6 x 12.3 mm	▽ 100 500	186370	≥ 14	≥ 14	14-16	-	-	P. 134	P. 149
		186371							
Cabineo insert M6 x 15.3 mm	▽ 100 500	186375	≥ 14	≥ 17	17-25	-	-	P. 134	P. 149
		186376							
Cabineo X Detachable	▽ 500 2000	186360	≥ 12	≥ 9	≥ 24	-	-	P. 136	P. 148
		186361							
Cabineo X black	▽ 500 2000	186365	≥ 12	≥ 9	≥ 24	-	-	P. 136	P. 148
		186366							
Cabineo 12 screw	▽ 500 2000	186380	-	≥ 13	≥ 24	-	-	P. 136	-
		186381							
Cabineo 8 screw	▽ 500	186382	-	≥ 9	≥ 16	-	-	P. 136	-
		186384							
Cabineo 8 M6 screw	▽ 500	186384	-	≥ 9	≥ 16	-	-	P. 136	-
		186386							
Cabineo X shelf support Ø 5	▽ 500	186386	-	≥ 9	≥ 16	-	-	P. 136	-
		186388							
Invis Mx2 Detachable	⊖ 20	6012300	≥ 18	≥ 15	-	-	-	P. 142	P. 150
		6012301							
		6012317							
		6012312							
		6012309							
		6012309							
		6012208							

Plan your furniture with Lamello

Are you planning a piece of furniture and you know what it needs to look like, but don't know which connector to use? Our new website makes it easy for you to find the right connector. Use the P-System configurator to display the correct position in the workpiece. Watch the tutorial videos for practical applications and useful tips. Try it for yourself at www.lamello.com!

Product finder

New, refined search options for your unique furniture!

You are looking for a connector for your sideboard that should have the following features:

- invisible joint
- mitre joint
- in a material thickness of 16 mm

Class P-14
Adjustable furniture connector

Class P-10
Adjustable connector for materials from 12 mm thickness

Class P-14/12 Mitrex
Adjustable furniture connector

Class P-14/12 Flexa
Adjustable furniture connector with flexible positioning

Class P-14 CNC
Adjustable furniture connector with precise alignment

Class P
Aligning elements suitable for the P-System groove

Texas P-14
Self-aligning connector for gluing materials from 14 mm thickness

Texas P-10
Self-aligning connector for gluing materials from 12 mm thickness

Class P-12
Self-aligning invisible connector for slide insertion

Zeta P2 cordless
The powerful P-System thread puller for cordless operation

Zeta P2
The machine for the working P-System, saving you time and differentiating your products from the market!

Wooden thread
The original wood thread that shaped the

[Load more](#)



P-System configurator

The configurator shows the exact positioning in the workpiece.

P-System Configurator
Find the right connector for your applications

Joining situation:

Angle α [°]:

Material thickness M1 [mm]:

Material thickness M2 [mm]:

[Calculate](#)

[Find connector solution](#)

Connector	Processing information							
	CNC		Zeta P2					
	Ø1	Ø2	Without spacer		With 2 mm spacer		With 4 mm spacer	
Class P-14	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2
Class P-14 CNC	Ø1	Ø2						
Class P-14 Flexa	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2
Class P Mitrex 14/12	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2
Class P-10	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2
Texas P-14	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2
Texas P-10	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2
Mitrex P-12	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2	Ø1	Ø2

All information is subject to change every connector is greatly dependent on the specific application size and material. We always recommend consulting a local dealer.



Lamello



Manufacturer:

Lamello AG
Joining technology
Hauptstrasse 149
CH-4416 Bubendorf
Tel. +41 61 935 36 36
info@lamello.com
www.lamello.com